





## Table Arm | 107 | BoxRail®, RaceRail®, WingRail® | Remote Power | Arm Anchor


Please read instructions in their entirety before proceeding with any part of the installation. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Consult a qualified electrician to ensure correct branch circuit rating. To prevent electric shock, disconnect all power before installing or servicing product. Rated for use in dry and damp locations only. Retain instructions for future reference.

Technical Support: 707.996.9898 or [technicalsupport@vode.com](mailto:technicalsupport@vode.com)


### Installed View

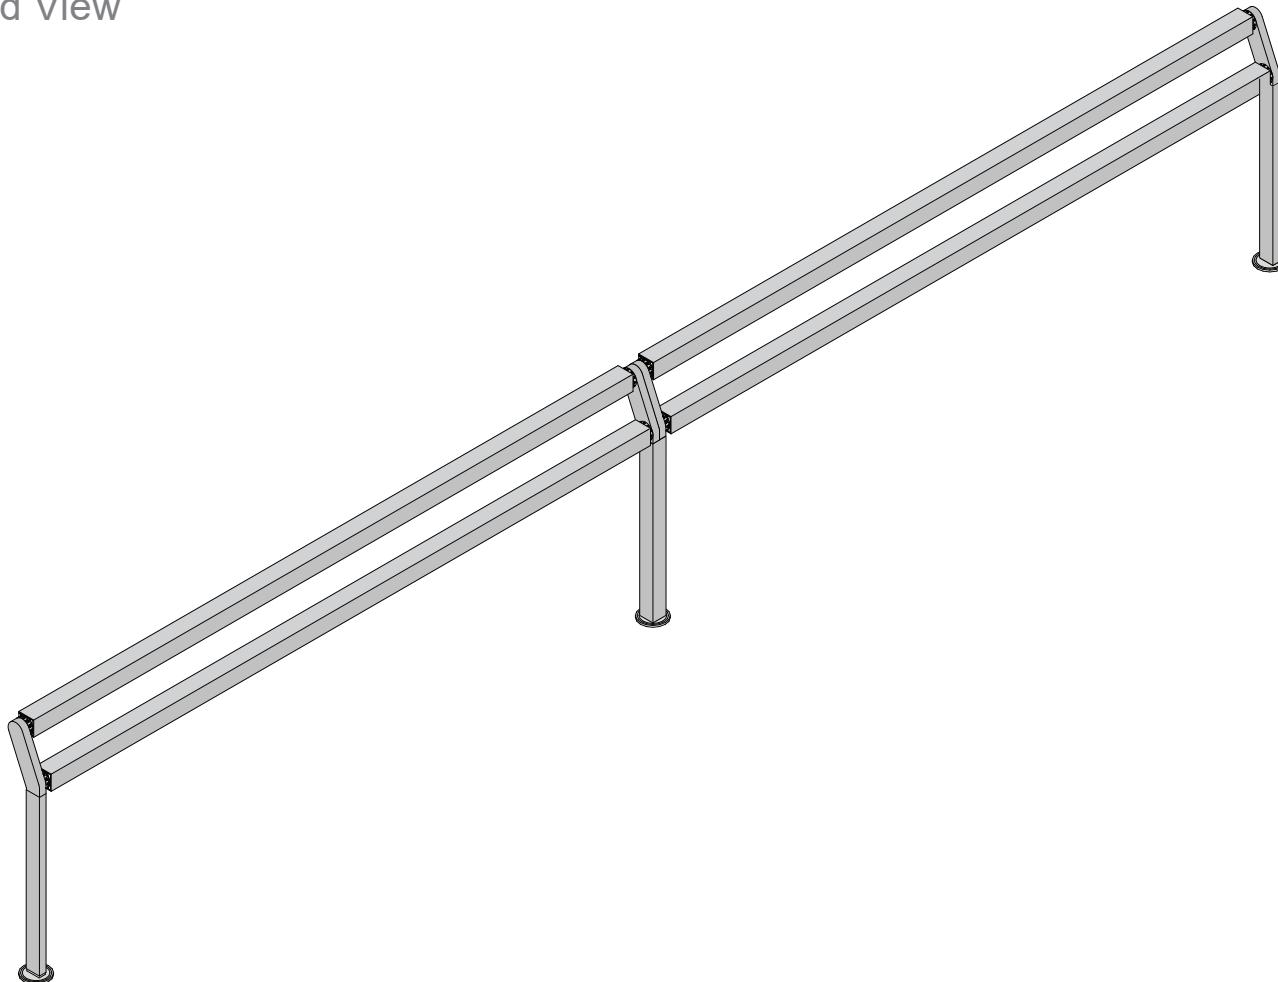

WingRail




BoxRail



RaceRail


**NOTE:** Single Rail systems do not have any Continuous Mounting components.

**NOTE:** WingRail orientation is critical. Be sure the wired hub and wire harness (power) connect to the Power Feed Side of the rail, identified by the green end cap.

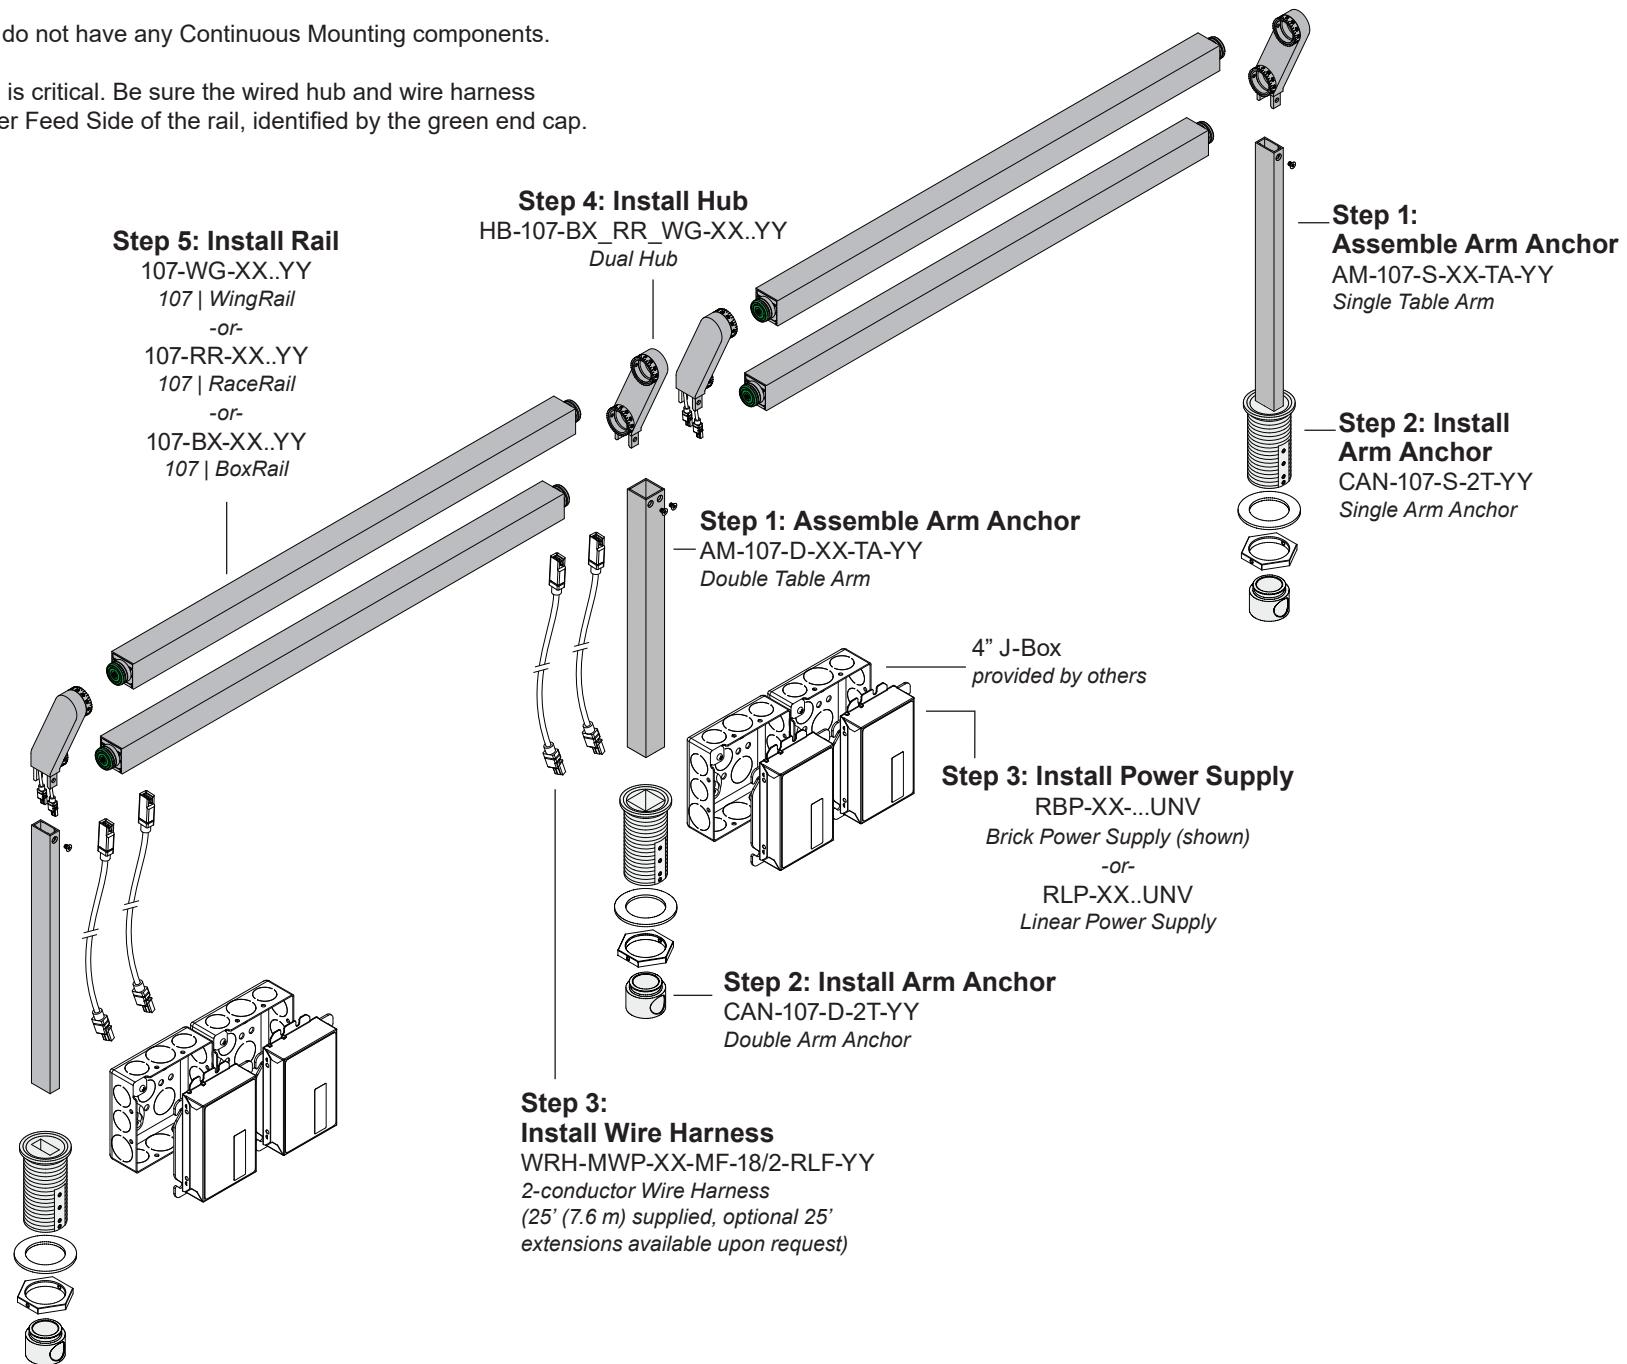

**Step 1: Assemble Arm Anchor**




Install the mounting arm to the arm anchor and secure in place using the installed set screws indicated.

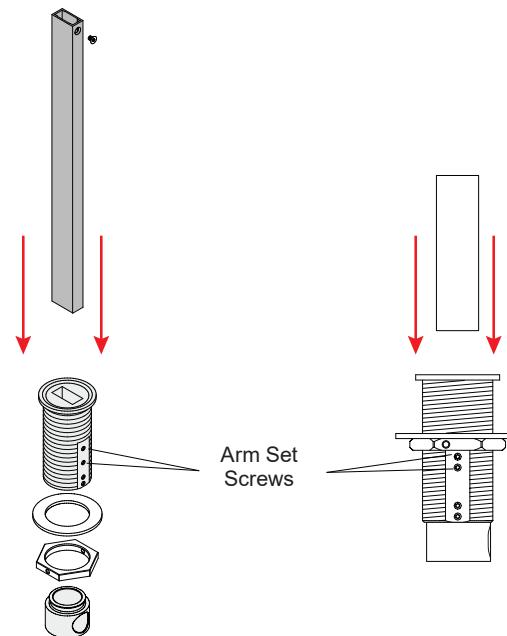**Step 2: Install Arm Anchor**

Determine layout using center-to-center dimensions (see page 5). Arm Anchor is designed to install into stable surfaces between 1/8" and 2 1/4" thick. For all Arm Anchor locations drill 1-11/16" hole and slide arm anchor into hole, secure with washer and nut. Each arm anchor is provided with 1/2" -14 NPSM female conduit thread.

**NOTE:** Vode low voltage wire harness is plenum rated. Install conduit to power supply housing as needed, per local building code.

If on/off anchor is specified, install during this step by following instructions on page 6.

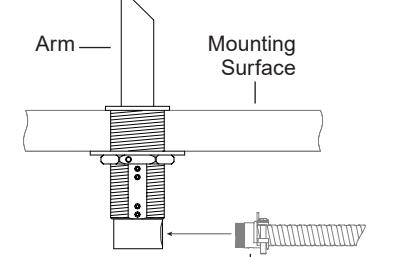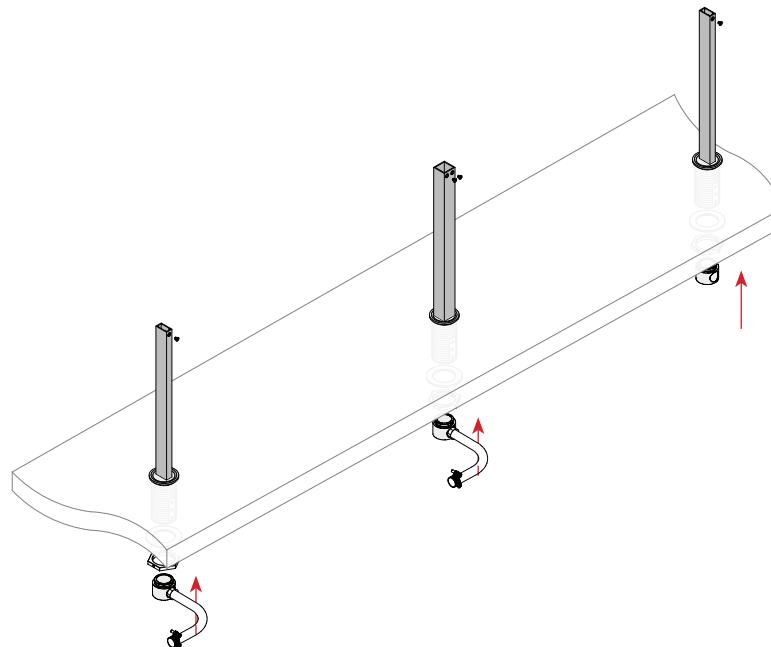


**Step 3: Install Wire Harness**

**IMPORTANT!** If system will be supplied with a brick driver, separate j-boxes will be not be provided.

Refer to appendix for installation of remote power housing.


Feed low voltage wire harness through arm into remote power housing, paying attention to which side is powered. Connect supplied plenum rated wire harness to pre-installed wire harness on remote power supply and run to j-box. Leave approximately 1" of wire harness hanging out of the arms.

**DO NOT POWER ON**

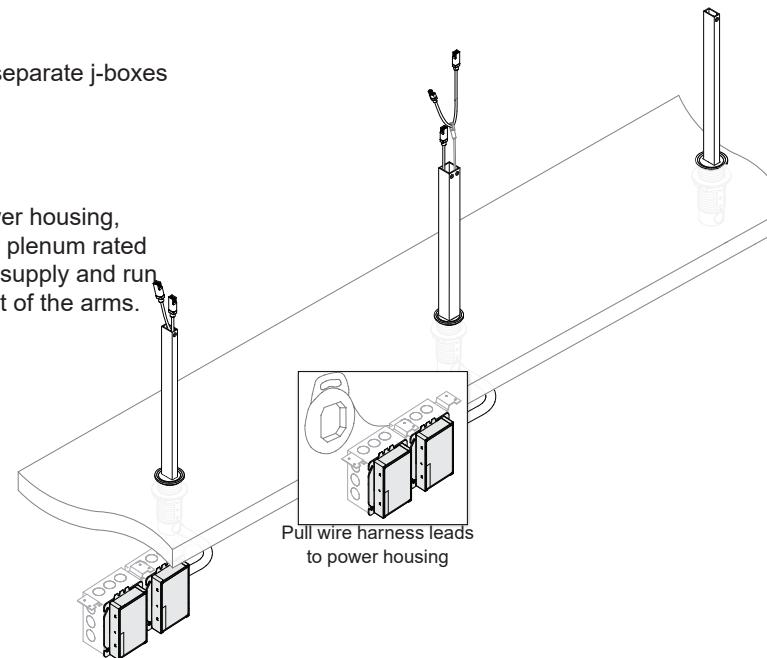
**Step 4: Assemble Rails**

Using one powered hub and one non-powered hub, assemble rails. Snap the rail into hub, paying special attention to which end is powered. Each rail will have two ends, one end cap will have a green circle, this end is inserted into the powered hub. The other end cap will have a red circle. This end is inserted into the non-powered hub.


**NOTE:** Each rail pair must be assembled before being installed into previously installed arms.

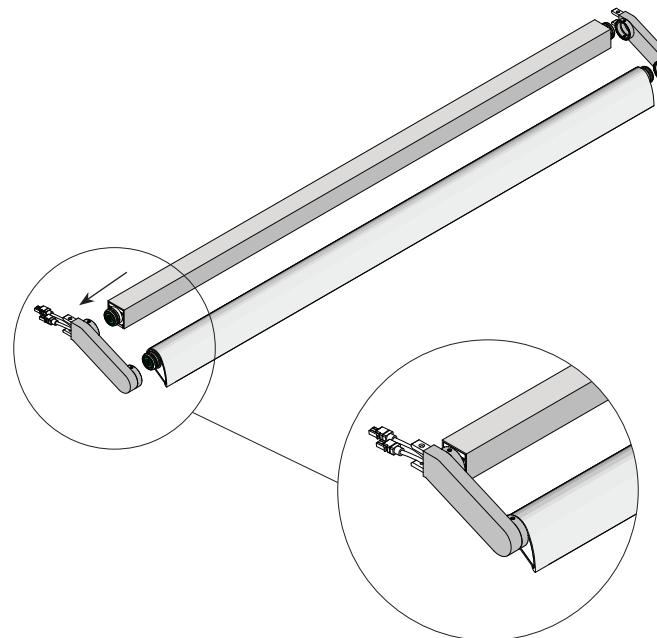

**Powered Side:**



Power fed through pins of hubs and couplers to green PCB boards in rails



Green End Cap = **Powered Side**





Red End Cap = **Non-Powered Side**

## Step 5: Install Rail

Connect rail wire harness to power wire harness. Be sure connectors are firmly fastened. Push excess wire into the arm(s), insert rail hub into arms and lightly secure in place using provided screws.

## POWER SYSTEM ON

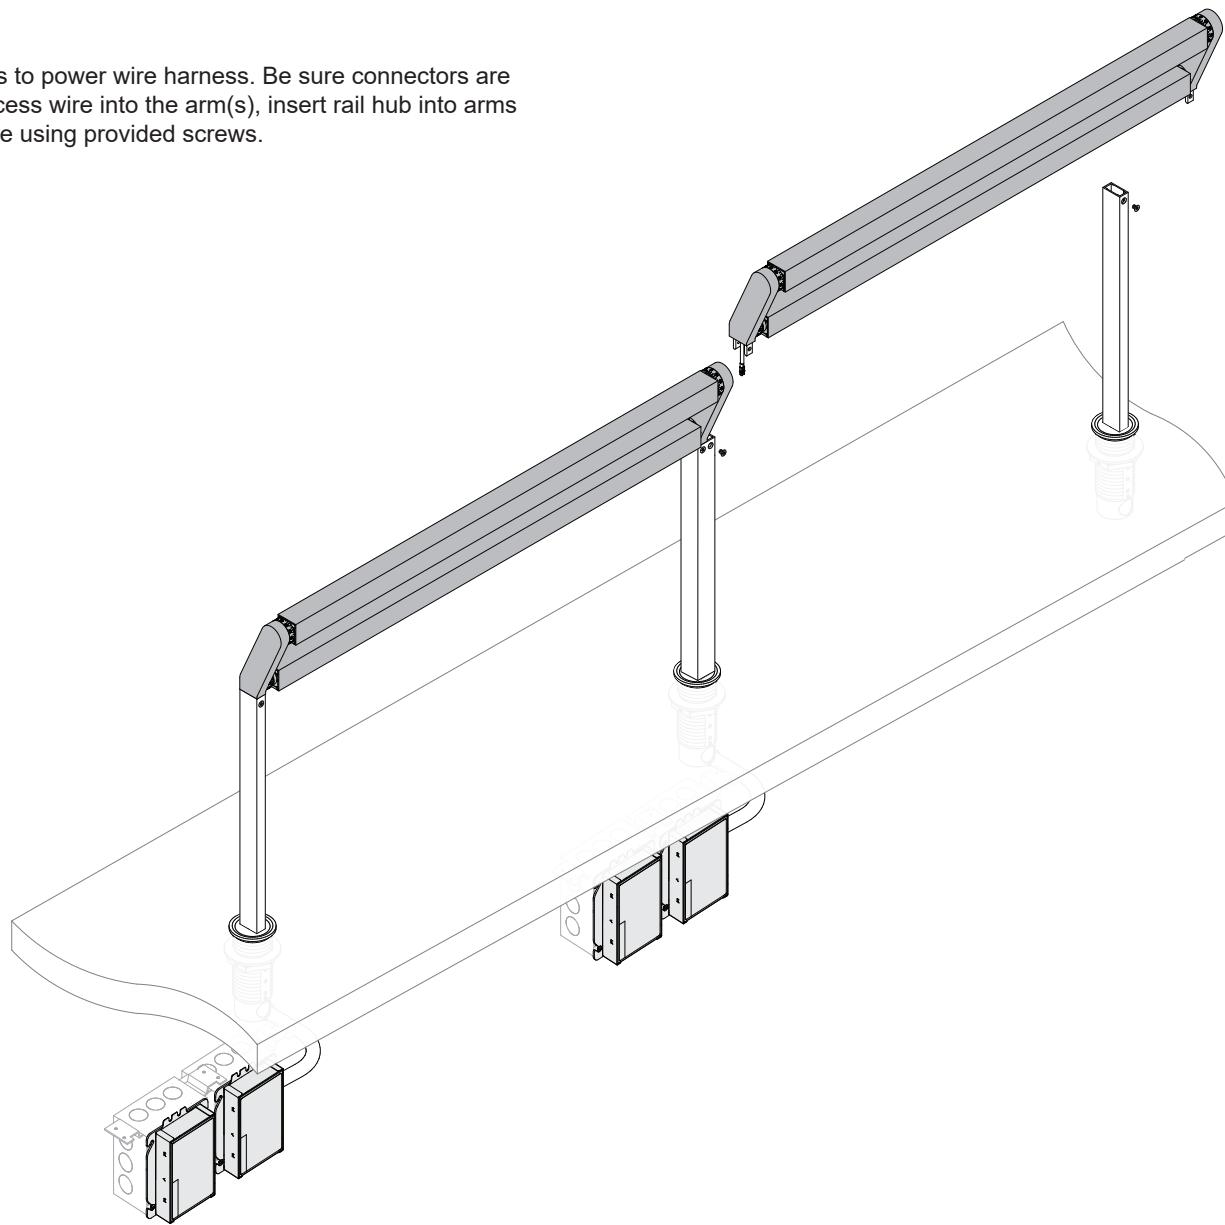

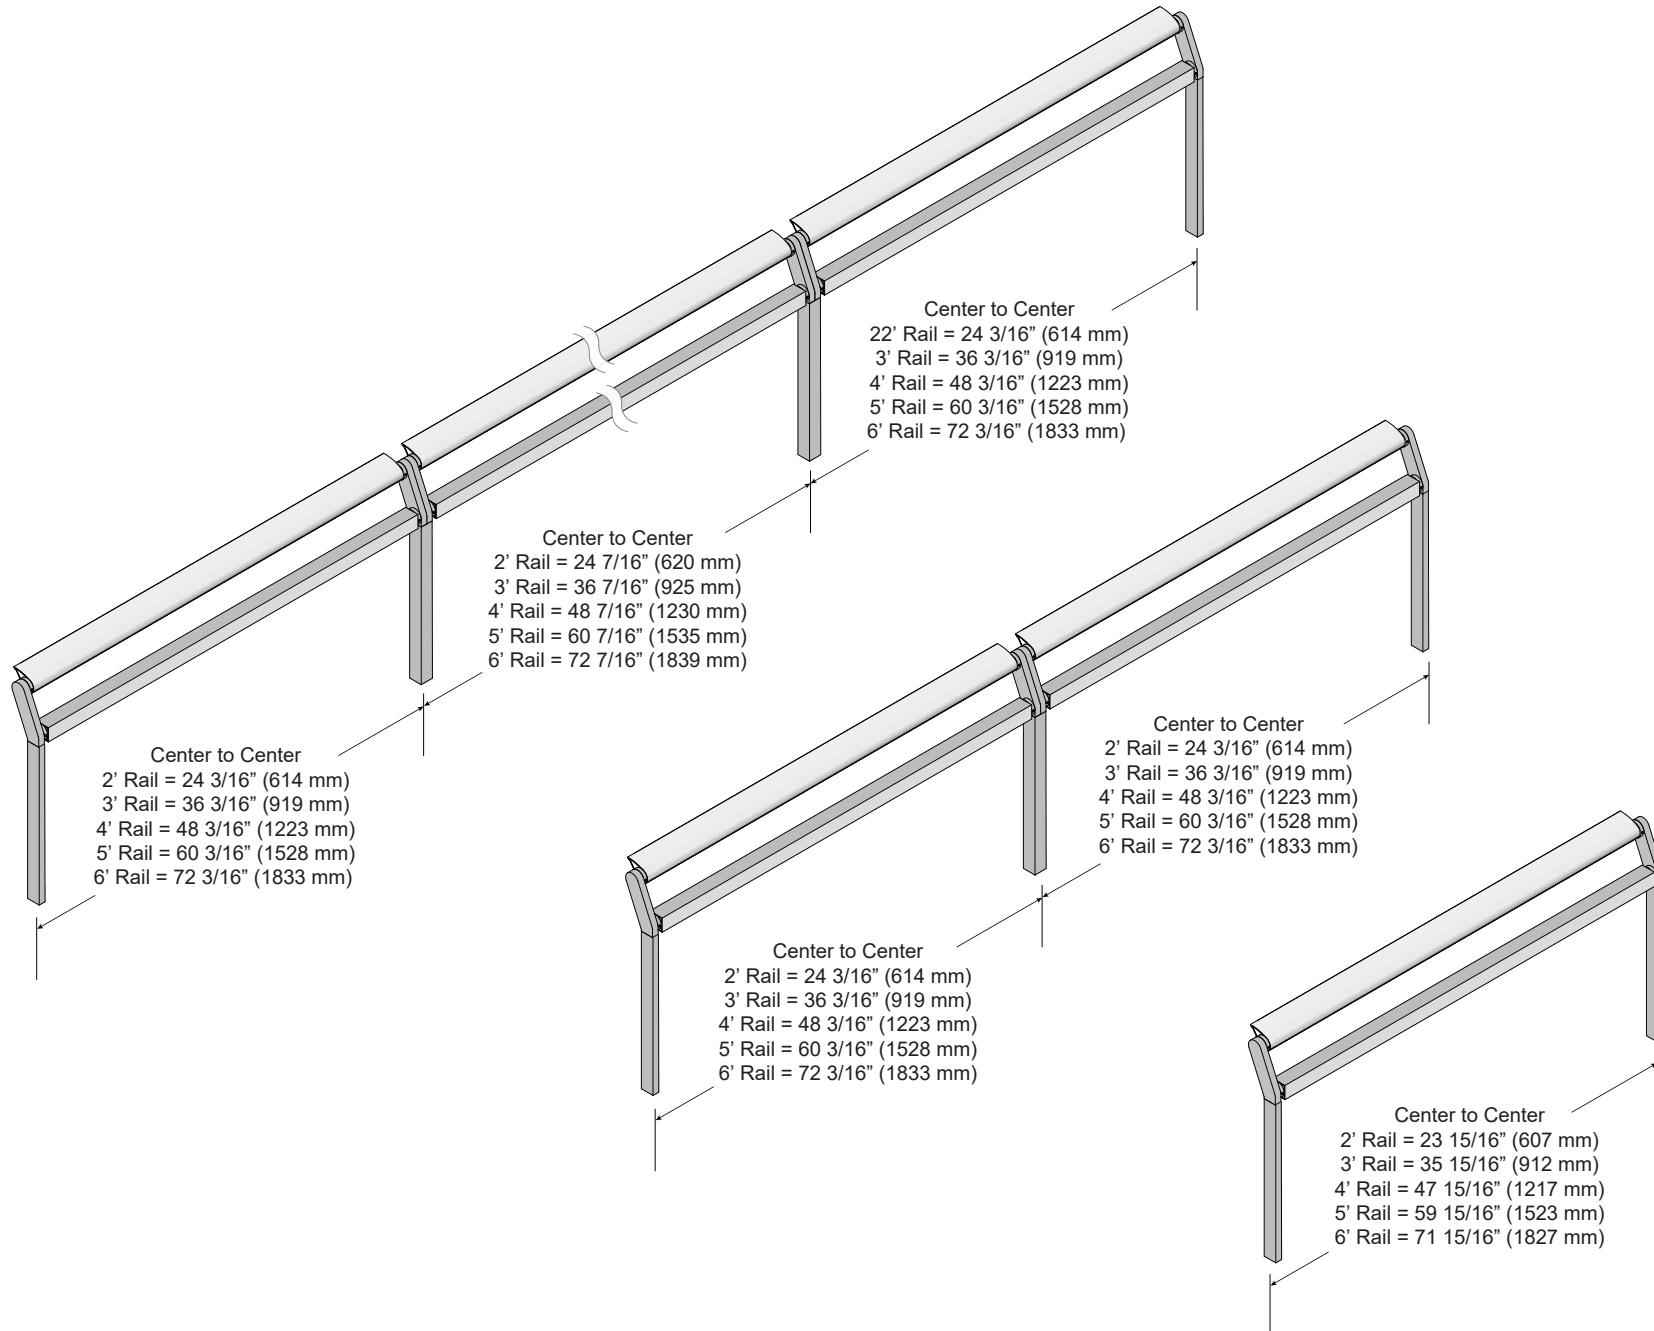


## Installing On/Off Switch Arm Anchor (optional)


Drill 1-11/16" hole. Secure On/Off Switch Arm Anchor to surface using washer and nut provided. Anchor is supplied with 1/2" -14 NPSM female thread. Conduit and conduit adaptors are provided by others.

**IMPORTANT!** Before installing on/off switch, turn off power at fuse box. On/off switch has 2 black wires attached. Connect 1 wire to the driver and one to the line voltage. The provided wires are 46" long.

Ground On/Off switch via ground screw installed in base.

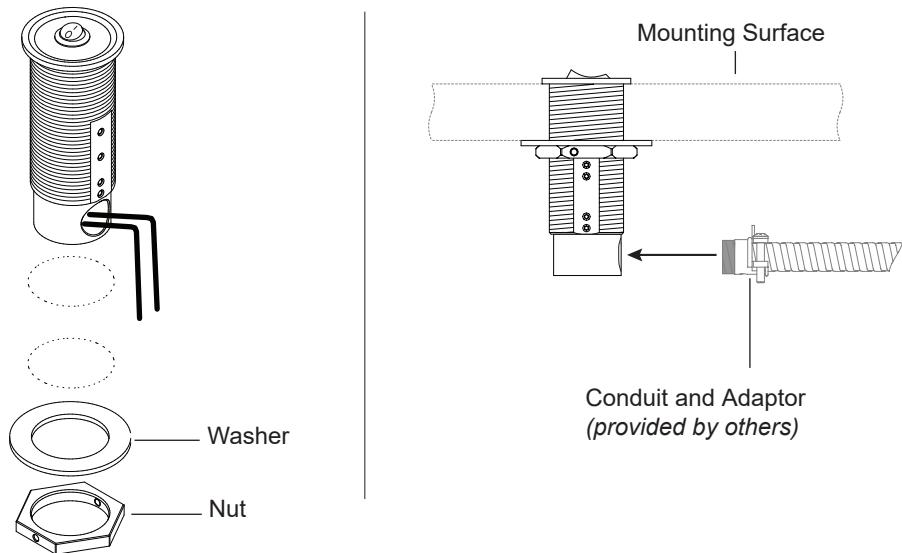

## Wiring Guide

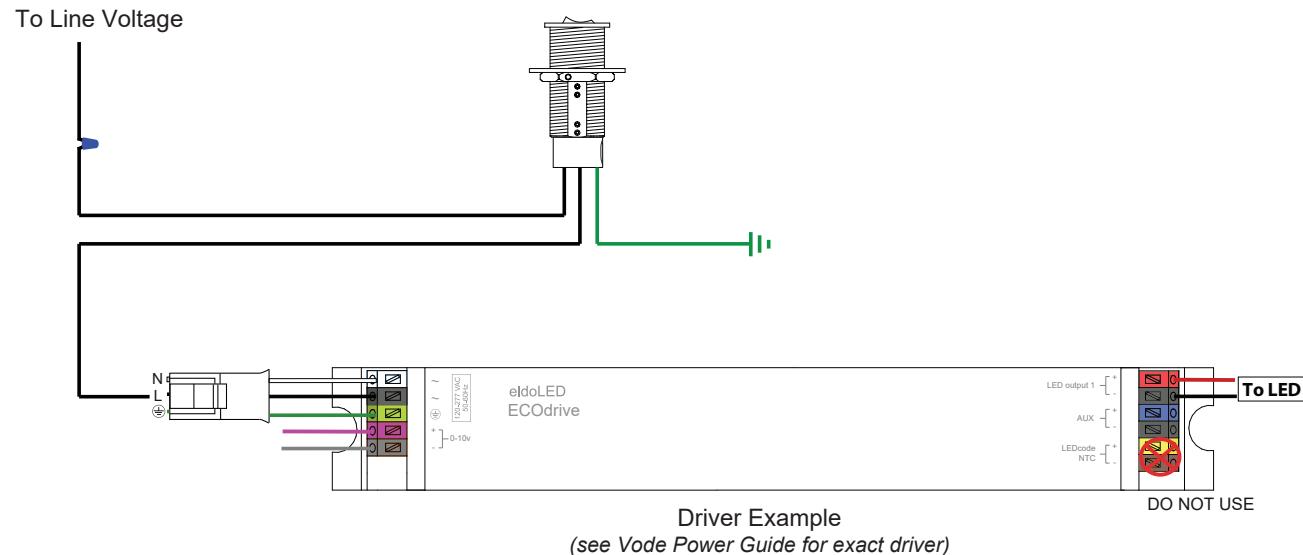

## Install Remote Brick Power Supply

**IMPORTANT!** Before any installing power supply, turn off electricity at circuit box.

**NOTE:** Vode Brick style driver mounting plate is designed to mount only to 4" Square metal j-boxes with a minimum volume of 21 cu. in.

Install j-box (*provided by others*) to desired surface using screws (*provided by others*). Run line, ground and neutral wiring and any applicable dimming controls into j-box through knockout and secure in place, using conduit as necessary per local coding. Use wire nuts (*provided by others*) to make a secure connection between all wiring. (*The provided wire leads are 18 AWG solid core*).

**DO NOT** power on system until instructed.


For remote power supply maximum distance or wiring questions, please consult **Vode Remote Power Guide**.

**NOTE:** If power housing is supplied pre-wired with cord and plug and wire harness installed, skip above steps and power system when instructed by plugging system into a standard outlet.

## Max Remote Driver Distance


Driver	Remote Distance
eldoLED	100' (30.5 m)
Lutron	<b>See Vode Power Guide</b>

For other wiring questions and driver specific information, see **Vode Remote Power Guide**.

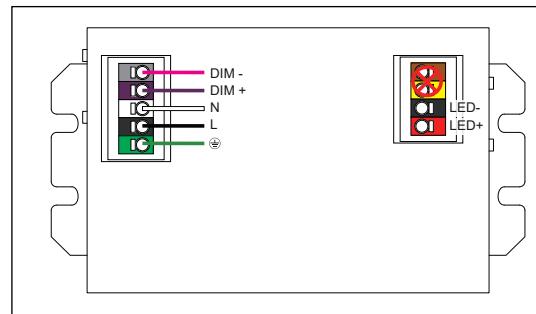

### Example Only

See **Vode Remote Power Guide** for wiring detail.

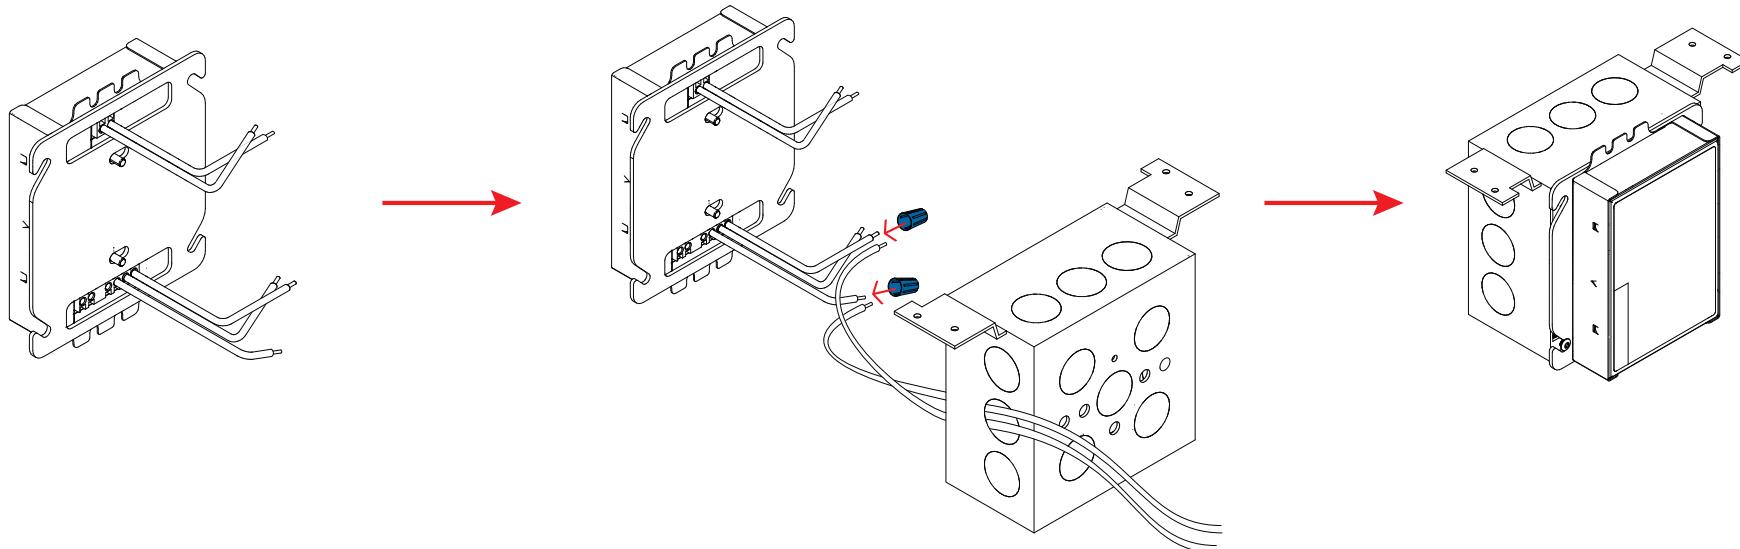

## Install Remote Linear Power Supply

**IMPORTANT!** Before installing any power supply, turn off electricity at circuit box.


Vode recommends keeping track of which lids comes with which housing, as the lid contains important installation labeling.

Using the indicated tab, remove power housing lid to access mounting points. Install power supply housing to desired surface using screws (*provided by others*). Run line, ground and neutral wiring and any applicable dimming controls into power housing through any provided knockout and secure in place, using conduit as necessary per local coding. Use wire nuts (*provided by others*) to make a secure connection between all wiring. (*The provided wire leads are 18 AWG solid core*).

**DO NOT** power on system until instructed.

For remote power supply maximum distance or other wiring questions, please consult Vode Power Guide.

**NOTE:** If power housing is supplied pre-wired with cord and plug and wire harness installed, skip above steps and power system when instructed by plugging system into a standard outlet.

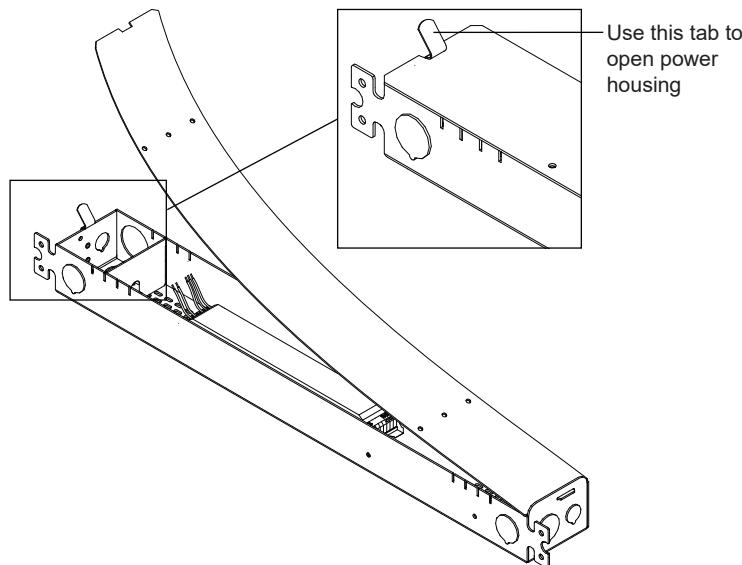


## Remote Driver Distance

All Vode linear remote drivers come in a 0.054" (1.4 mm) formed galvanized steel power supply housing with five (5) knockouts: (4) 1-1/8", (1) 7/8" and (1) 9/16". Power supply housing dimensions: 2 3/8" (56 mm) x 1 5/8" (33 mm) x 20 1/16" (525 mm)

Driver	Remote Distance
eldoLED	100' (30.5 m)
Lutron	<b>See Power Guide</b>
Magnitude	100' (30.5 m)
OSRAM	100' (30.5 m)

For other wiring questions and driver specific information, see **Vode Remote Power Guide**.

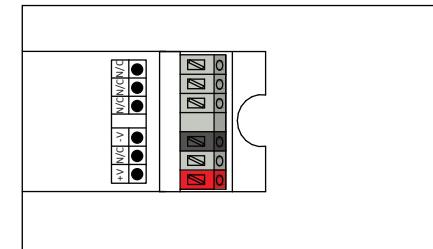

**Example Only**  
See *Vode Remote Power Guide* for wiring detail.

## Trouble Shooting Guide

### **My fixture will not turn on:**

Check all wiring is correct and all connections are fastened properly.

Ensure rail is oriented so power feed side (green end cap) is positioned correctly and aligned to the siren hub.

If all wiring is correct, remove fixture and connect it to a known working driver. If the fixture lights up, then the problem is with the installed driver or wiring:

- 1) Check line voltage to driver is present.
- 2) Check driver wiring (see **Vode Driver Guide** for details) and check wiring to fixture.
- 3) Check driver and dimming system are compatible (see **Vode Dimmer Guide** and the dimmer manufacturer's website).

If fixture still doesn't light up, check that all dimming wires are installed correctly. Reversed polarity on any driver will cause the entire system to not work, (see **Vode Driver Guide** for wiring details).

### **The fixture is not dimming properly:**

Check all wiring is correct and all connections are fastened properly.

Check driver wiring (see **Vode Driver Guide** for details). Make sure driver is compatible with dimming controls (see **Vode Dimmer Guide** and the dimmer manufacturer's website).

### **Rail is not rotating:**

**DO NOT FORCE RAIL!** When properly installed, rails will turn easily.

Check that outer hub set screws are loose.

---

**For any help with installation or technical information,  
contact Vode Tech Service at 707-996-9898.**

## Important Notes

---

- Listed to UL standards for damp location by a Nationally Recognized Testing Laboratory (NRTL) recognized by OSHA
- Power Type: Class 2 (<60v) constant current driver.
- Dimming curve is factory preset to linear. Logarithmic is available upon request. See Vode Driver Guide for specific details and wiring diagram.
- Unless specified, one driver per rail will be supplied.
- 5 Year Limited Warranty. All material and component parts manufactured by Vode are guaranteed to be free from defects of material and/or workmanship for a period of 5 years from date of sale. Product must be installed according to Vode installation instructions and accepted trade practices. Power supplies and other auxiliary equipment are not covered under Vode warranty but may be covered by separate OEM warranty.