

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-BAGB-BL-SO.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L072413202 (SOURCE REPORT FOR REFERENCE)
[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB
[ISSUE DATE] 8/25/2024
[MANUFAC] Vode Lighting LLC
[LUMCAT] 707-Z2-48-359-BAGB-BL-SO
[LUMINAIRE] ZipTwo LED, 48" 3500K, 90 CRI, Zipper Board, Asymmetric Wallwash Baffle, Black Finish, Standard Output
[MORE] 3535 Low Glare, Standard Output, Black
[TEST PROCEDURE] IESNA:LM-79-19

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	750
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	29
Total Luminaire Watts	26.1
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.84
Spacing Criterion (90-270)	0.86
Spacing Criterion (Diagonal)	0.78
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.13 ft
Luminous Width (90-270)	4.00 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	1695	1941	2383
55	1030	636	545
65	493	247	206
75	134	134	67
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-BAGB-BL-SO.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>
0.0	933.24	933.24	933.24	933.24	933.24	933.24	933.24	933.24	933.24
2.5	1020.60	1022.28	1023.12	975.24	1013.88	876.96	849.24	808.08	795.48
5.0	1198.68	1173.48	1118.04	1002.96	983.64	813.96	774.48	733.32	722.40
7.5	1394.40	1338.12	1216.32	1023.12	943.32	752.64	703.92	659.40	653.52
10.0	1543.08	1469.16	1296.12	1037.40	897.12	691.32	635.04	582.12	572.88
12.5	1559.04	1503.60	1339.80	1044.12	846.72	633.36	564.48	496.44	489.72
15.0	1409.52	1411.20	1328.88	1040.76	792.12	572.04	491.40	415.80	405.72
17.5	1130.64	1195.32	1244.04	1022.28	736.68	512.40	421.68	340.20	333.48
20.0	843.36	928.20	1096.20	990.36	678.72	455.28	354.48	279.72	274.68
22.5	608.16	685.44	905.52	939.12	617.40	397.32	291.48	232.68	233.52
25.0	418.32	488.04	714.84	869.40	555.24	340.20	241.92	194.04	195.72
27.5	294.00	345.24	547.68	782.04	495.60	288.12	199.08	163.80	168.84
30.0	212.52	246.12	407.40	681.24	433.44	241.08	166.32	139.44	146.16
32.5	162.12	180.60	299.04	576.24	372.12	195.72	135.24	120.96	129.36
35.0	126.84	137.76	219.24	469.56	310.80	156.24	110.88	104.16	110.88
37.5	102.48	106.68	160.44	367.92	249.48	120.96	91.56	88.20	95.76
40.0	84.84	84.84	119.28	278.04	189.84	93.24	75.60	74.76	81.48
42.5	70.56	68.88	89.04	198.24	136.08	68.04	61.32	63.00	73.08
45.0	57.96	54.60	66.36	131.88	81.48	46.20	48.72	54.60	66.36
47.5	49.56	44.52	49.56	76.44	41.16	28.56	38.64	47.04	60.48
50.0	42.00	36.96	35.28	38.64	24.36	16.80	29.40	40.32	50.40
52.5	35.28	30.24	24.36	21.84	17.64	12.60	20.16	31.92	37.80
55.0	28.56	24.36	17.64	16.80	15.12	10.92	14.28	23.52	26.88
57.5	22.68	18.48	10.92	12.60	10.92	8.40	10.08	15.12	18.48
60.0	18.48	15.12	8.40	10.08	8.40	5.88	6.72	10.92	14.28
62.5	14.28	10.92	5.88	6.72	6.72	5.04	5.04	8.40	10.92
65.0	10.08	7.56	5.04	5.88	4.20	3.36	4.20	5.88	8.40
67.5	6.72	5.04	4.20	4.20	3.36	2.52	2.52	4.20	5.88
70.0	4.20	3.36	2.52	2.52	2.52	1.68	2.52	3.36	2.52
72.5	2.52	2.52	1.68	1.68	1.68	1.68	1.68	2.52	1.68
75.0	1.68	0.00	1.68	0.84	0.84	0.84	0.84	0.84	1.68
77.5	1.68	0.00	0.84	0.00	0.84	0.00	0.00	0.00	0.00
80.0	1.68	0.84	0.00	0.00	0.00	0.00	0.00	0.00	0.00
82.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
87.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-BAGB-BL-SO.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	326.71	N.A.	43.60
0-30	541.32	N.A.	72.20
0-40	670.26	N.A.	89.40
0-60	742.75	N.A.	99.00
0-80	749.85	N.A.	100.00
0-90	749.88	N.A.	100.00
10-90	659.10	N.A.	87.90
20-40	343.54	N.A.	45.80
20-50	398.63	N.A.	53.20
40-70	78.37	N.A.	10.50
60-80	7.10	N.A.	0.90
70-80	1.22	N.A.	0.20
80-90	0.03	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	749.88	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	90.78
10-20	235.94
20-30	214.61
30-40	128.93
40-50	55.09
50-60	17.40
60-70	5.87
70-80	1.22
80-90	0.03
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-BAGB-BL-SO.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	87	85	83	81
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	75
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	70	66	63	62
8	80	71	65	61	79	70	64	61	69	64	60	68	63	60	67	63	60	58
9	76	67	61	57	75	66	61	57	65	60	57	65	60	57	64	59	56	55
10	73	63	58	54	72	63	58	54	62	57	54	61	57	54	61	56	53	52

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-BAGB-BL-SO.IES


UGR TABLE - CORRECTED

Reflectances										
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	5.4	6.4	5.8	6.7	7.0	1.3	2.3	1.7	2.6	2.9
	3H	5.6	6.5	6.0	6.9	7.2	1.6	2.5	2.0	2.8	3.2
	4H	5.6	6.4	6.0	6.7	7.1	1.6	2.4	2.0	2.7	3.1
	6H	5.5	6.3	6.0	6.7	7.1	1.5	2.2	1.9	2.6	3.0
	8H	5.5	6.2	5.9	6.6	7.0	1.4	2.1	1.8	2.5	2.9
	12H	5.4	6.1	5.9	6.5	6.9	1.4	2.0	1.8	2.4	2.8
4H	2H	5.2	6.0	5.6	6.4	6.8	1.3	2.1	1.7	2.5	2.9
	3H	5.5	6.2	5.9	6.6	7.0	1.7	2.3	2.1	2.8	3.2
	4H	5.4	6.0	5.9	6.4	6.9	1.7	2.2	2.1	2.7	3.1
	6H	5.4	5.9	5.9	6.4	6.8	1.6	2.1	2.0	2.5	3.0
	8H	5.4	5.8	5.8	6.3	6.7	1.5	2.0	2.0	2.4	2.9
	12H	5.3	5.7	5.8	6.2	6.6	1.4	1.8	1.9	2.3	2.8
8H	4H	5.3	5.7	5.8	6.2	6.7	1.6	2.0	2.0	2.5	2.9
	6H	5.3	5.6	5.8	6.1	6.6	1.5	1.8	2.0	2.3	2.8
	8H	5.2	5.5	5.7	6.0	6.5	1.4	1.7	1.9	2.2	2.7
	12H	5.1	5.4	5.7	5.9	6.5	1.3	1.6	1.8	2.1	2.7
12H	4H	5.2	5.6	5.7	6.1	6.6	1.5	1.9	2.0	2.4	2.8
	6H	5.2	5.5	5.7	6.0	6.5	1.4	1.7	1.9	2.2	2.7
	8H	5.1	5.4	5.7	5.9	6.5	1.3	1.6	1.8	2.1	2.7

Maximum UGR = 7.2

POLAR GRAPH

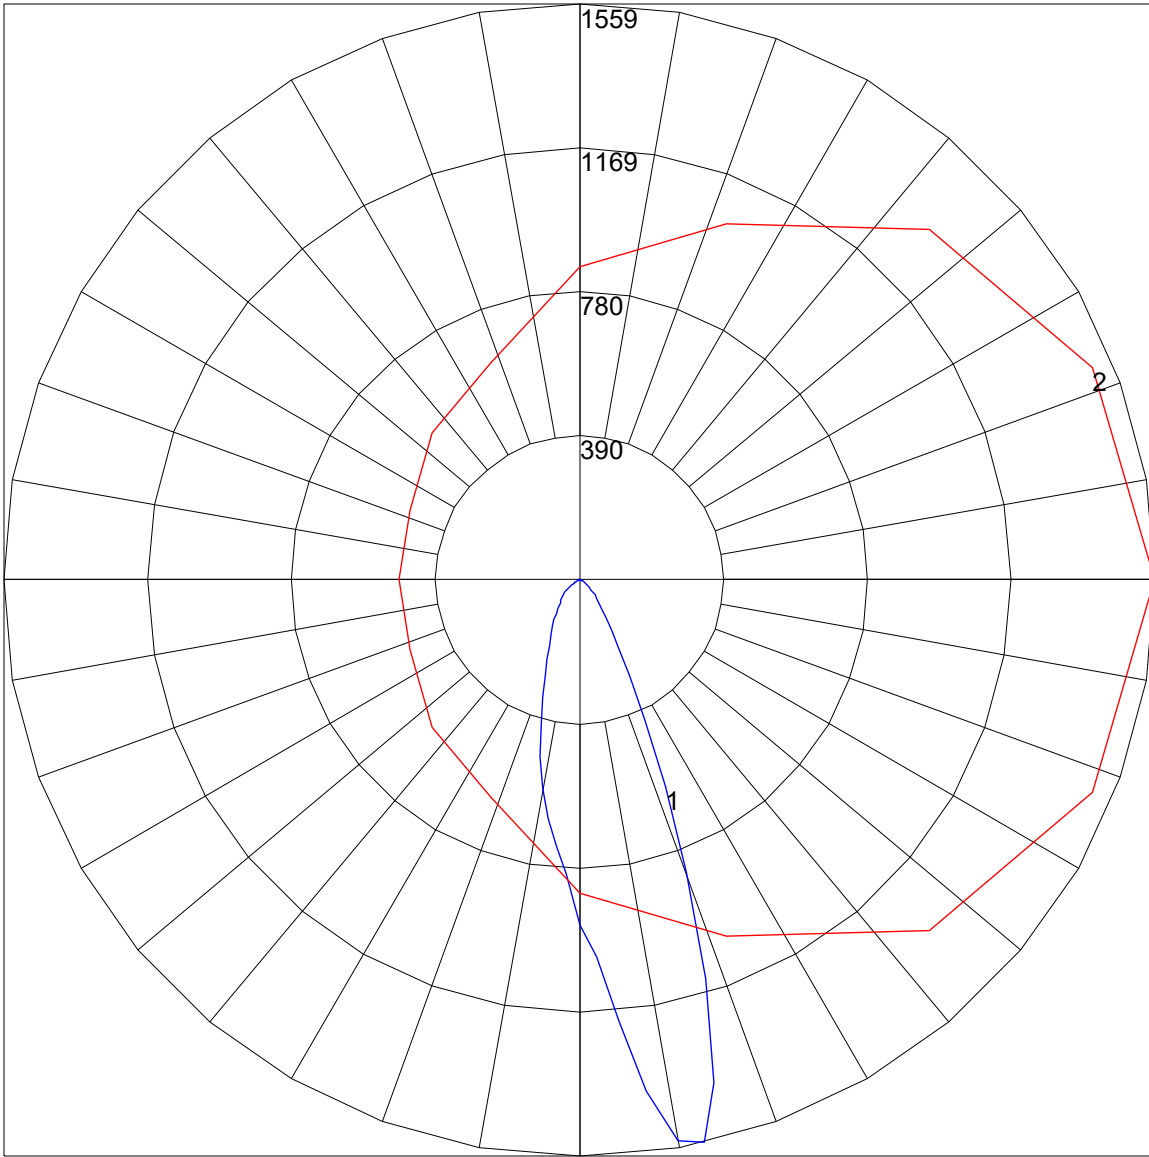

Maximum Candela = 1559.04 Located At Horizontal Angle = 0, Vertical Angle = 12.5
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (12.5) (Through Max. Cd.)