

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-WH-HO.IES**

**DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
[TEST] L072413204 (SOURCE REPORT FOR REFERENCE)  
[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB  
[ISSUE DATE] 8/25/2024  
[MANUFAC] Vode Lighting LLC  
[LUMCAT] 707-Z2-48-359-B1GB-WH-HO  
[LUMINAIRE] ZipTwo LED, 48", 3500K, 80 CRI, Zipper Board, 25° Graphite Baffle White Finish, High Output  
[MORE] 3535 Low Glare, High Output, White  
[TEST PROCEDURE] IESNA:LM-79-19

**CHARACTERISTICS**

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2121
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	54
Total Luminaire Watts	39.4
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.74
Spacing Criterion (90-270)	0.34
Spacing Criterion (Diagonal)	0.50
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	4.00 ft
Luminous Width (90-270)	0.13 ft
Luminous Height	0.13 ft

**LUMINANCE DATA (cd/sq.m)**

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	7104	3726	5473
55	1506	1174	3301
65	695	362	1538
75	271	122	321
85	0	0	36

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>
<b>0.0</b>	4408.0	4408.0	4408.0	4408.0	4408.0	4408.0	4408.0	4408.0	4408.0
<b>2.5</b>	4389.0	4366.2	4278.8	4233.2	4039.4	4047.0	4219.9	4322.5	4392.8
<b>5.0</b>	4237.0	4126.8	3824.7	3659.4	3423.8	3391.5	3739.2	4041.3	4233.2
<b>7.5</b>	4035.6	3782.9	3241.4	2967.8	2745.5	2707.5	3140.7	3657.5	4012.8
<b>10.0</b>	3803.8	3382.0	2669.5	2350.3	2166.0	2145.1	2578.3	3262.3	3794.3
<b>12.5</b>	3551.1	2981.1	2181.2	1882.9	1746.1	1727.1	2107.1	2878.5	3549.2
<b>15.0</b>	3273.7	2597.3	1791.7	1539.0	1442.1	1421.2	1738.5	2489.0	3262.3
<b>17.5</b>	2990.6	2232.5	1497.2	1278.7	1200.8	1179.9	1449.7	2131.8	2979.2
<b>20.0</b>	2703.7	1911.4	1255.9	1062.1	1012.7	980.4	1214.1	1824.0	2694.2
<b>22.5</b>	2411.1	1630.2	1056.4	904.4	900.6	853.1	1008.9	1550.4	2405.4
<b>25.0</b>	2109.0	1377.5	874.0	801.8	782.8	746.7	837.9	1305.3	2101.4
<b>27.5</b>	1827.8	1160.9	739.1	691.6	704.9	640.3	714.4	1100.1	1825.9
<b>30.0</b>	1554.2	976.6	634.6	611.8	647.9	573.8	615.6	923.4	1554.2
<b>32.5</b>	1299.6	813.2	539.6	552.9	589.0	516.8	516.8	765.7	1293.9
<b>35.0</b>	1054.5	666.9	448.4	490.2	537.7	457.9	435.1	621.3	1045.0
<b>37.5</b>	824.6	530.1	387.6	440.8	492.1	408.5	374.3	490.2	815.1
<b>40.0</b>	611.8	408.5	326.8	389.5	448.4	362.9	313.5	380.0	606.1
<b>42.5</b>	419.9	309.7	271.7	345.8	410.4	321.1	260.3	283.1	418.0
<b>45.0</b>	250.8	218.5	220.4	305.9	374.3	285.0	210.9	197.6	248.9
<b>47.5</b>	123.5	140.6	172.9	267.9	336.3	247.0	167.2	123.5	123.5
<b>50.0</b>	74.1	79.8	133.0	228.0	294.5	209.0	127.3	68.4	74.1
<b>52.5</b>	57.0	53.2	95.0	191.9	256.5	172.9	93.1	47.5	57.0
<b>55.0</b>	43.7	41.8	66.5	153.9	222.3	142.5	62.7	38.0	47.5
<b>57.5</b>	34.2	34.2	43.7	125.4	191.9	114.0	43.7	32.3	38.0
<b>60.0</b>	28.5	26.6	32.3	98.8	161.5	89.3	32.3	24.7	28.5
<b>62.5</b>	19.0	22.8	24.7	74.1	129.2	66.5	24.7	17.1	19.0
<b>65.0</b>	15.2	15.2	19.0	55.1	98.8	47.5	17.1	15.2	15.2
<b>67.5</b>	13.3	13.3	15.2	36.1	70.3	34.2	15.2	13.3	9.5
<b>70.0</b>	9.5	9.5	11.4	24.7	43.7	22.8	11.4	9.5	9.5
<b>72.5</b>	5.7	7.6	7.6	17.1	26.6	15.2	7.6	5.7	5.7
<b>75.0</b>	3.8	5.7	5.7	13.3	19.0	9.5	5.7	5.7	5.7
<b>77.5</b>	3.8	3.8	5.7	7.6	11.4	5.7	3.8	3.8	3.8
<b>80.0</b>	0.0	0.0	1.9	5.7	5.7	3.8	0.0	1.9	0.0
<b>82.5</b>	0.0	0.0	0.0	1.9	3.8	0.0	0.0	0.0	0.0
<b>85.0</b>	0.0	0.0	0.0	0.0	1.9	0.0	0.0	0.0	0.0
<b>87.5</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
<b>90.0</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-WH-HO.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	900.49	N.A.	42.50
0-30	1411.57	N.A.	66.60
0-40	1782.06	N.A.	84.00
0-60	2074.19	N.A.	97.80
0-80	2120.27	N.A.	100.00
0-90	2120.85	N.A.	100.00
10-90	1790.4	N.A.	84.40
20-40	881.57	N.A.	41.60
20-50	1084.3	N.A.	51.10
40-70	328.72	N.A.	15.50
60-80	46.08	N.A.	2.20
70-80	9.49	N.A.	0.40
80-90	0.58	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	2120.85	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	330.45
10-20	570.04
20-30	511.08
30-40	370.49
40-50	202.73
50-60	89.40
60-70	36.59
70-80	9.49
80-90	0.58
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-WH-HO.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0	
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	0
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93	0
2	107	102	98	95	105	101	97	93	97	94	91	94	92	89	92	89	88	86	0
3	102	95	90	86	100	94	89	85	91	87	84	89	85	82	86	84	81	80	0
4	96	89	83	79	95	87	82	78	85	81	77	83	79	76	81	78	75	74	0
5	92	83	77	73	90	82	76	72	80	75	72	78	74	71	77	73	70	69	0
6	87	78	72	67	85	77	71	67	76	70	67	74	70	66	73	69	66	64	0
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60	0
8	79	69	63	59	78	69	63	59	68	62	59	67	62	58	66	61	58	57	0
9	75	66	60	56	74	65	59	56	64	59	55	63	59	55	62	58	55	54	0
10	72	62	57	53	71	62	56	53	61	56	52	60	56	52	60	55	52	51	0


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-WH-HO.IES**

**UGR TABLE - CORRECTED**

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	2.7	3.6	2.8	3.9	4.2	13.6	14.7	13.9	15.0	15.3
	3H	2.8	3.8	3.2	4.1	4.5	14.1	15.1	14.5	15.4	15.8
	4H	2.8	3.7	3.2	4.1	4.5	14.1	15.0	14.5	15.4	15.8
	6H	2.7	3.6	3.2	3.9	4.3	14.1	14.9	14.5	15.3	15.7
	8H	2.7	3.5	3.1	3.9	4.3	14.0	14.8	14.5	15.2	15.6
	12H	2.7	3.4	3.1	3.8	4.2	14.0	14.7	14.4	15.1	15.5
4H	2H	2.7	3.6	3.1	4.0	4.3	13.3	14.2	13.7	14.6	15.0
	3H	3.1	3.9	3.5	4.3	4.7	13.9	14.6	14.3	15.0	15.4
	4H	3.2	3.8	3.6	4.2	4.7	13.9	14.5	14.3	15.0	15.4
	6H	3.1	3.7	3.6	4.1	4.6	13.8	14.4	14.3	14.9	15.3
	8H	3.0	3.6	3.5	4.0	4.5	13.8	14.3	14.3	14.8	15.2
	12H	3.0	3.4	3.5	3.9	4.4	13.7	14.2	14.2	14.7	15.2
8H	4H	3.2	3.8	3.7	4.2	4.7	13.7	14.2	14.2	14.7	15.2
	6H	3.2	3.6	3.7	4.1	4.6	13.7	14.1	14.2	14.6	15.1
	8H	3.1	3.5	3.6	4.0	4.5	13.6	14.0	14.1	14.5	15.0
	12H	3.0	3.4	3.6	3.9	4.4	13.6	13.9	14.1	14.4	15.0
12H	4H	3.2	3.7	3.7	4.1	4.6	13.7	14.1	14.1	14.6	15.1
	6H	3.1	3.5	3.7	4.0	4.5	13.6	14.0	14.1	14.4	15.0
	8H	3.1	3.4	3.6	3.9	4.5	13.6	13.9	14.1	14.4	15.0

Maximum UGR = 15.8

POLAR GRAPH

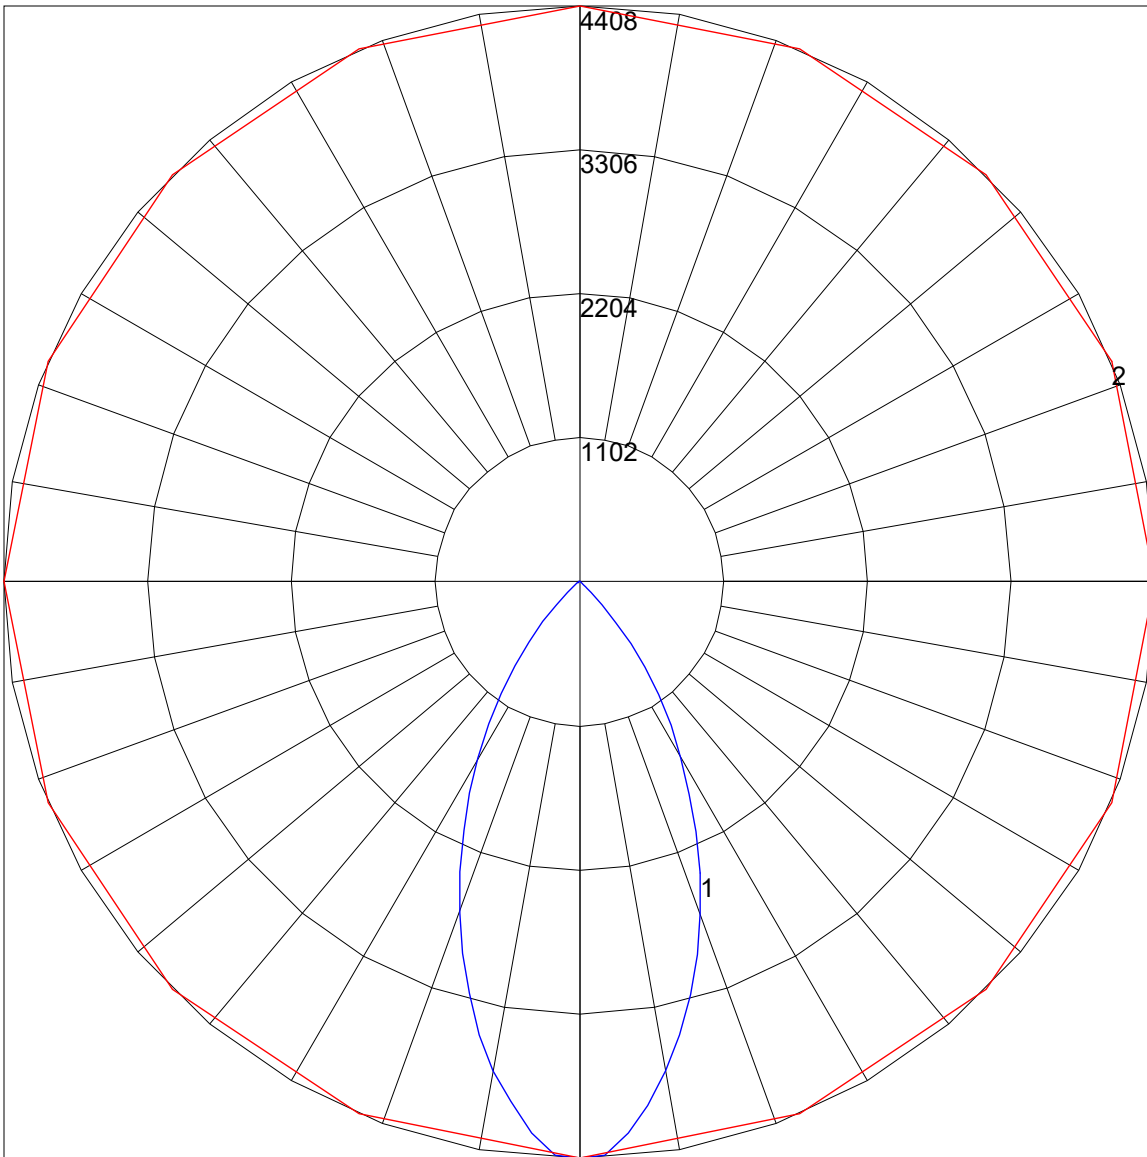

Maximum Candela = 4408 Located At Horizontal Angle = 0, Vertical Angle = 0  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)