

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-WH-LO.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L072413204 (SOURCE REPORT FOR REFERENCE)
[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB
[ISSUEDATE] 8/25/2024
[MANUFAC] Vode Lighting LLC
[LUMCAT] 707-Z2-48-Z-35-B1GB-WH-LO
[LUMINAIRE] ZipTwo LED, 48", 3500K, 80 CRI, Zipper Board, 25° Graphite Baffle White Finish, Low Output
[MORE] 3535 Low Glare, Low Output, White
[TEST PROCEDURE] IESNA:LM-79-19

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	558
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	42
Total Luminaire Watts	13.2
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.74
Spacing Criterion (90-270)	0.34
Spacing Criterion (Diagonal)	0.50
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	4.00 ft
Luminous Width (90-270)	0.13 ft
Luminous Height	0.13 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	1870	980	1440
55	396	309	869
65	183	95	405
75	71	32	84
85	0	0	10

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-WH-LO.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>
0.0	1160.0	1160.0	1160.0	1160.0	1160.0	1160.0	1160.0	1160.0	1160.0
2.5	1155.0	1149.0	1126.0	1114.0	1063.0	1065.0	1110.5	1137.5	1156.0
5.0	1115.0	1086.0	1006.5	963.0	901.0	892.5	984.0	1063.5	1114.0
7.5	1062.0	995.5	853.0	781.0	722.5	712.5	826.5	962.5	1056.0
10.0	1001.0	890.0	702.5	618.5	570.0	564.5	678.5	858.5	998.5
12.5	934.5	784.5	574.0	495.5	459.5	454.5	554.5	757.5	934.0
15.0	861.5	683.5	471.5	405.0	379.5	374.0	457.5	655.0	858.5
17.5	787.0	587.5	394.0	336.5	316.0	310.5	381.5	561.0	784.0
20.0	711.5	503.0	330.5	279.5	266.5	258.0	319.5	480.0	709.0
22.5	634.5	429.0	278.0	238.0	237.0	224.5	265.5	408.0	633.0
25.0	555.0	362.5	230.0	211.0	206.0	196.5	220.5	343.5	553.0
27.5	481.0	305.5	194.5	182.0	185.5	168.5	188.0	289.5	480.5
30.0	409.0	257.0	167.0	161.0	170.5	151.0	162.0	243.0	409.0
32.5	342.0	214.0	142.0	145.5	155.0	136.0	136.0	201.5	340.5
35.0	277.5	175.5	118.0	129.0	141.5	120.5	114.5	163.5	275.0
37.5	217.0	139.5	102.0	116.0	129.5	107.5	98.5	129.0	214.5
40.0	161.0	107.5	86.0	102.5	118.0	95.5	82.5	100.0	159.5
42.5	110.5	81.5	71.5	91.0	108.0	84.5	68.5	74.5	110.0
45.0	66.0	57.5	58.0	80.5	98.5	75.0	55.5	52.0	65.5
47.5	32.5	37.0	45.5	70.5	88.5	65.0	44.0	32.5	32.5
50.0	19.5	21.0	35.0	60.0	77.5	55.0	33.5	18.0	19.5
52.5	15.0	14.0	25.0	50.5	67.5	45.5	24.5	12.5	15.0
55.0	11.5	11.0	17.5	40.5	58.5	37.5	16.5	10.0	12.5
57.5	9.0	9.0	11.5	33.0	50.5	30.0	11.5	8.5	10.0
60.0	7.5	7.0	8.5	26.0	42.5	23.5	8.5	6.5	7.5
62.5	5.0	6.0	6.5	19.5	34.0	17.5	6.5	4.5	5.0
65.0	4.0	4.0	5.0	14.5	26.0	12.5	4.5	4.0	4.0
67.5	3.5	3.5	4.0	9.5	18.5	9.0	4.0	3.5	2.5
70.0	2.5	2.5	3.0	6.5	11.5	6.0	3.0	2.5	2.5
72.5	1.5	2.0	2.0	4.5	7.0	4.0	2.0	1.5	1.5
75.0	1.0	1.5	1.5	3.5	5.0	2.5	1.5	1.5	1.5
77.5	1.0	1.0	1.5	2.0	3.0	1.5	1.0	1.0	1.0
80.0	0.0	0.0	0.5	1.5	1.5	1.0	0.0	0.5	0.0
82.5	0.0	0.0	0.0	0.5	1.0	0.0	0.0	0.0	0.0
85.0	0.0	0.0	0.0	0.0	0.5	0.0	0.0	0.0	0.0
87.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-WH-LO.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	236.97	N.A.	42.50
0-30	371.47	N.A.	66.60
0-40	468.96	N.A.	84.00
0-60	545.84	N.A.	97.80
0-80	557.97	N.A.	100.00
0-90	558.12	N.A.	100.00
10-90	471.16	N.A.	84.40
20-40	231.99	N.A.	41.60
20-50	285.34	N.A.	51.10
40-70	86.50	N.A.	15.50
60-80	12.13	N.A.	2.20
70-80	2.50	N.A.	0.40
80-90	0.15	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	558.12	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	86.96
10-20	150.01
20-30	134.49
30-40	97.50
40-50	53.35
50-60	23.53
60-70	9.63
70-80	2.50
80-90	0.15
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-WH-LO.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0	
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100
1	113	110	108	106	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93
2	107	102	98	95	105	101	97	94	97	94	91	94	92	89	92	89	88	86	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	82	86	84	81	80	80
4	96	89	83	79	95	88	82	78	85	81	77	83	79	76	81	78	75	74	74
5	92	83	77	73	90	82	76	72	80	75	72	79	74	71	77	73	70	69	69
6	87	78	72	67	85	77	71	67	76	71	67	74	70	66	73	69	66	64	64
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60	60
8	79	69	63	59	78	69	63	59	68	62	59	67	62	58	66	61	58	57	57
9	75	66	60	56	74	65	60	56	64	59	55	63	59	55	62	58	55	54	54
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51	51


IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-WH-LO.IES

UGR TABLE - CORRECTED

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	0.0	0.0	0.0	0.0	0.0	8.9	10.0	9.2	10.3	10.6
	3H	0.0	0.0	0.0	0.0	0.0	9.4	10.4	9.8	10.7	11.1
	4H	0.0	0.0	0.0	0.0	0.0	9.4	10.3	9.8	10.7	11.1
	6H	0.0	0.0	0.0	0.0	0.0	9.4	10.2	9.8	10.6	11.0
	8H	0.0	0.0	0.0	0.0	0.0	9.3	10.1	9.8	10.5	10.9
	12H	0.0	0.0	0.0	0.0	0.0	9.3	10.0	9.7	10.4	10.8
4H	2H	0.0	0.0	0.0	0.0	0.0	8.6	9.5	9.0	9.9	10.3
	3H	0.0	0.0	0.0	0.0	0.0	9.2	9.9	9.6	10.3	10.7
	4H	0.0	0.0	0.0	0.0	0.0	9.2	9.8	9.6	10.3	10.7
	6H	0.0	0.0	0.0	0.0	0.0	9.1	9.7	9.6	10.2	10.6
	8H	0.0	0.0	0.0	0.0	0.0	9.1	9.6	9.6	10.1	10.5
	12H	0.0	0.0	0.0	0.0	0.0	9.0	9.5	9.5	10.0	10.5
8H	4H	0.0	0.0	0.0	0.0	0.0	9.0	9.5	9.5	10.0	10.5
	6H	0.0	0.0	0.0	0.0	0.0	9.0	9.4	9.5	9.9	10.4
	8H	0.0	0.0	0.0	0.0	0.0	8.9	9.3	9.4	9.8	10.3
	12H	0.0	0.0	0.0	0.0	0.0	8.9	9.2	9.4	9.7	10.3
12H	4H	0.0	0.0	0.0	0.0	0.0	9.0	9.4	9.4	9.9	10.4
	6H	0.0	0.0	0.0	0.0	0.0	8.9	9.3	9.4	9.7	10.3
	8H	0.0	0.0	0.0	0.0	0.0	8.9	9.2	9.4	9.7	10.3

Maximum UGR = 11.1

POLAR GRAPH

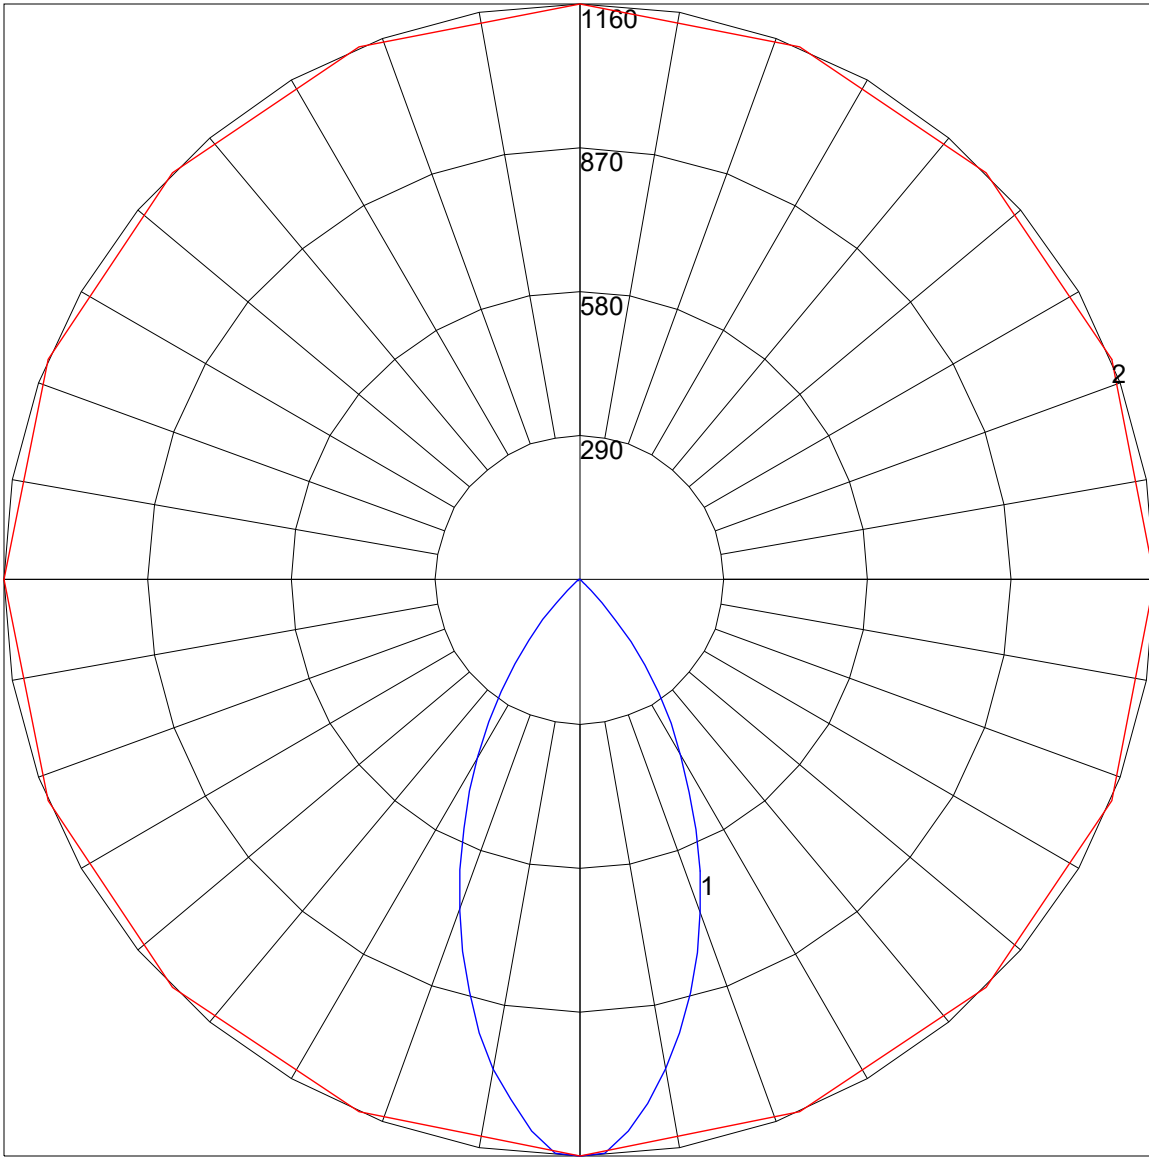

Maximum Candela = 1160 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)