

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B3WB-WH-LO.IES**

**DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
 [TEST] L072413212 (SOURCE REPORT BASED FOR REFERENCE  
 [TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB  
 [ISSUE DATE] 8/27/2024  
 [MANUFAC] Vode Lighting LLC  
 [LUMCAT] 707-Z2-48-Z-35-B3WB-WH-LO  
 [LUMINAIRE] ZipTwo LED, 48", 3500K, 80 CRI, Zipper Board, 120° White Baffle, White Finish, Low Output  
 [MORE] 3535 Low Glare, Low Output, White  
 [TEST PROCEDURE] IESNA:LM-79-19

**CHARACTERISTICS**

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	809
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	61
Total Luminaire Watts	13.2
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.96
Spacing Criterion (90-270)	1.34
Spacing Criterion (Diagonal)	1.20
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	4.00 ft
Luminous Width (90-270)	0.13 ft
Luminous Height	0.13 ft

**LUMINANCE DATA (cd/sq.m)**

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4079	3220	3042
55	3204	1889	1886
65	2539	1106	1066
75	1603	461	414
85	433	63	67

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B3WB-WH-LO.IES**

**CANDELA TABULATION**

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>
<b>0.0</b>	420.5	420.5	420.5	420.5	420.5	420.5	420.5	420.5	420.5
<b>2.5</b>	416.5	417.5	418.5	421.0	422.0	421.0	419.0	417.0	416.0
<b>5.0</b>	408.0	411.0	416.0	421.0	424.0	421.5	415.5	409.5	408.0
<b>7.5</b>	397.5	402.5	411.5	422.5	427.5	422.0	411.0	400.5	398.0
<b>10.0</b>	385.0	391.5	406.0	422.5	430.5	421.5	405.5	392.0	387.5
<b>12.5</b>	370.5	379.5	399.0	421.5	433.0	420.0	399.5	380.0	374.0
<b>15.0</b>	355.5	366.5	390.5	420.5	435.5	418.5	392.0	367.5	359.0
<b>17.5</b>	338.5	352.5	381.5	417.5	436.5	415.0	382.5	353.0	341.0
<b>20.0</b>	322.0	337.5	371.5	413.5	437.0	410.5	372.5	336.5	325.0
<b>22.5</b>	305.0	321.5	359.0	408.0	436.5	405.5	359.5	321.5	308.5
<b>25.0</b>	286.5	304.5	346.0	400.5	432.5	397.0	345.0	304.5	289.0
<b>27.5</b>	269.0	288.0	331.0	390.5	424.0	385.0	331.0	285.5	271.0
<b>30.0</b>	251.5	270.0	315.5	376.5	408.0	369.5	316.0	267.5	253.0
<b>32.5</b>	233.0	252.0	298.5	358.0	383.0	348.5	297.5	248.5	234.0
<b>35.0</b>	214.5	233.0	280.0	333.0	350.0	320.0	277.5	229.5	215.5
<b>37.5</b>	197.0	214.0	259.5	302.5	311.5	288.5	258.0	210.0	198.0
<b>40.0</b>	179.5	195.5	237.0	270.5	273.0	255.0	235.0	190.5	179.5
<b>42.5</b>	161.0	176.5	213.5	236.5	238.5	223.0	210.5	171.0	162.0
<b>45.0</b>	144.0	157.5	190.5	206.5	208.0	195.0	187.0	152.0	143.5
<b>47.5</b>	127.5	138.5	166.5	180.0	182.5	170.0	163.0	133.5	126.5
<b>50.0</b>	114.0	120.5	144.5	157.0	161.0	149.5	141.0	116.0	114.0
<b>52.5</b>	103.0	107.0	125.0	138.0	143.5	131.0	121.5	103.0	103.0
<b>55.0</b>	93.0	96.0	107.0	121.0	127.0	115.5	105.0	93.0	93.0
<b>57.5</b>	84.0	85.5	92.0	106.0	112.5	101.0	91.0	82.5	83.0
<b>60.0</b>	74.0	75.5	79.5	92.5	98.0	88.0	78.5	72.5	74.0
<b>62.5</b>	63.5	66.0	68.5	79.0	83.0	74.5	67.5	63.5	63.5
<b>65.0</b>	55.5	56.5	58.0	66.0	68.5	61.5	56.5	53.5	55.5
<b>67.5</b>	47.0	48.0	48.0	54.0	55.0	50.5	47.0	45.0	46.0
<b>70.0</b>	37.5	38.5	38.5	43.0	43.5	39.0	38.0	36.0	37.0
<b>72.5</b>	30.0	30.0	29.0	32.5	33.0	30.0	28.5	27.5	29.5
<b>75.0</b>	22.5	22.0	21.5	24.0	24.5	21.5	21.5	20.5	22.5
<b>77.5</b>	16.0	16.0	15.5	17.0	17.5	15.0	15.0	14.0	15.0
<b>80.0</b>	10.0	10.0	10.0	11.5	11.5	10.0	9.5	9.0	10.0
<b>82.5</b>	6.0	6.0	5.5	7.0	7.5	6.0	5.5	5.0	5.0
<b>85.0</b>	2.5	2.5	2.5	4.0	3.5	2.5	2.5	1.5	2.5
<b>87.5</b>	0.0	0.0	1.0	1.5	1.5	1.0	1.0	0.0	0.0
<b>90.0</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B3WB-WH-LO.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	150.23	N.A.	18.60
0-30	311.94	N.A.	38.50
0-40	485.61	N.A.	60.00
0-60	721.71	N.A.	89.20
0-80	805.44	N.A.	99.50
0-90	809.39	N.A.	100.00
10-90	769.97	N.A.	95.10
20-40	335.38	N.A.	41.40
20-50	474.83	N.A.	58.70
40-70	295.44	N.A.	36.50
60-80	83.73	N.A.	10.30
70-80	24.40	N.A.	3.00
80-90	3.95	N.A.	0.50
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	809.39	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	39.42
10-20	110.81
20-30	161.71
30-40	173.67
40-50	139.44
50-60	96.66
60-70	59.34
70-80	24.40
80-90	3.95
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B3WB-WH-LO.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	78	77
3	95	86	79	73	92	84	78	72	81	76	71	79	74	70	76	72	69	67
4	88	77	70	64	86	76	69	63	74	67	62	71	66	62	69	65	61	59
5	81	70	62	56	79	69	61	56	67	60	55	65	59	55	63	58	54	52
6	76	64	56	50	74	63	55	50	61	54	49	60	54	49	58	53	49	47
7	71	58	50	45	69	58	50	45	56	49	44	55	49	44	53	48	44	42
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	40	36	35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	37	33	32


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B3WB-WH-LO.IES**

**UGR TABLE - CORRECTED**

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	11.8	13.2	12.1	13.5	13.8	14.9	16.4	15.3	16.7	17.0
	3H	12.7	14.0	13.1	14.3	14.7	16.0	17.3	16.4	17.6	18.0
	4H	12.9	14.1	13.3	14.5	14.8	16.2	17.4	16.6	17.8	18.2
	6H	13.0	14.1	13.4	14.4	14.8	16.4	17.5	16.8	17.8	18.2
	8H	12.9	14.0	13.4	14.4	14.8	16.4	17.4	16.8	17.8	18.2
	12H	12.9	13.9	13.3	14.3	14.7	16.3	17.4	16.8	17.7	18.2
4H	2H	12.3	13.5	12.7	13.8	14.2	15.0	16.2	15.4	16.6	16.9
	3H	13.3	14.3	13.7	14.7	15.1	16.2	17.2	16.6	17.6	18.0
	4H	13.6	14.5	14.0	14.9	15.3	16.5	17.4	16.9	17.8	18.2
	6H	13.7	14.4	14.1	14.9	15.3	16.6	17.4	17.1	17.8	18.3
	8H	13.6	14.4	14.1	14.8	15.3	16.6	17.4	17.1	17.8	18.3
	12H	13.6	14.3	14.1	14.7	15.2	16.6	17.3	17.1	17.8	18.2
8H	4H	13.7	14.4	14.1	14.8	15.3	16.4	17.1	16.9	17.6	18.1
	6H	13.8	14.4	14.3	14.8	15.3	16.6	17.2	17.1	17.7	18.2
	8H	13.7	14.3	14.3	14.8	15.3	16.6	17.1	17.1	17.7	18.2
	12H	13.7	14.2	14.2	14.7	15.3	16.6	17.1	17.1	17.6	18.2
12H	4H	13.6	14.3	14.1	14.8	15.2	16.4	17.0	16.9	17.5	18.0
	6H	13.7	14.3	14.3	14.7	15.3	16.6	17.1	17.1	17.6	18.1
	8H	13.7	14.2	14.3	14.7	15.3	16.6	17.1	17.1	17.6	18.1

Maximum UGR = 18.3

POLAR GRAPH

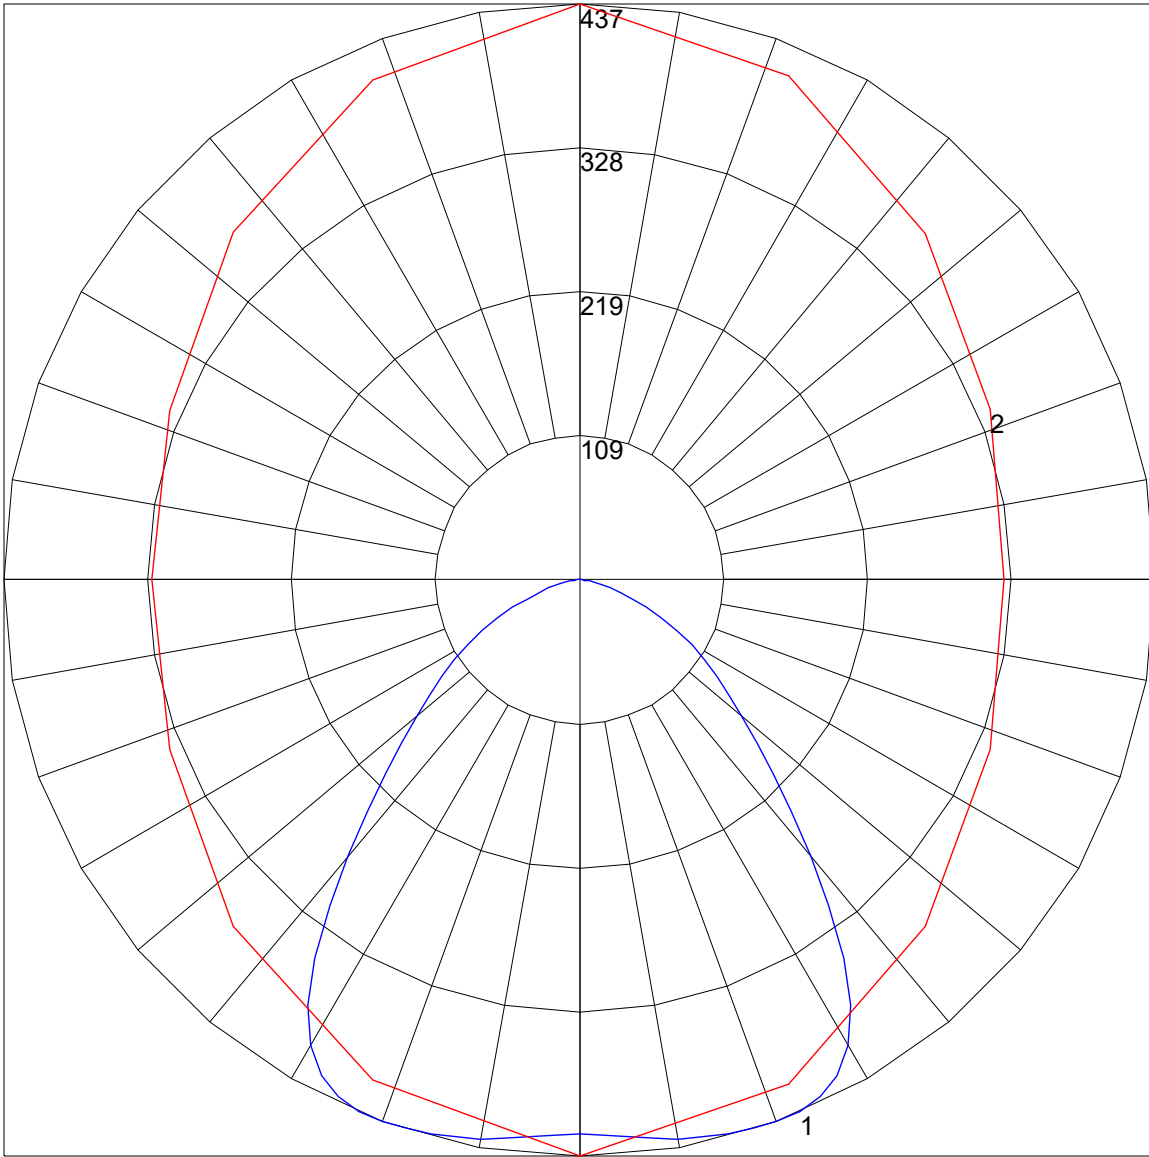

Maximum Candela = 437 Located At Horizontal Angle = 90, Vertical Angle = 20  
# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (20) (Through Max. Cd.)