

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B1GB-WH-HO.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L072413204 (SOURCE REPORT FOR REFERENCE)
[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB
[ISSUE DATE] 8/25/2024
[MANUFAC] Vode Lighting LLC
[LUMCAT] 707-Z2-48-Z-359-B1GB-WH-HO
[LUMINAIRE] ZipTwo LED, 48", 3500K, 90 CRI, Zipper Board, 25° Graphite Baffle White Finish, High Output
[MORE] 3535, Low Glare, High Output, White
[TEST PROCEDURE] IESNA:LM-79-19

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1786
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	45
Total Luminaire Watts	39.4
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.74
Spacing Criterion (90-270)	0.34
Spacing Criterion (Diagonal)	0.50
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	4.00 ft
Luminous Width (90-270)	0.13 ft
Luminous Height	0.13 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	5982	3138	4609
55	1268	988	2780
65	586	305	1295
75	228	103	270
85	0	0	31

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>
0.0	3712.0	3712.0	3712.0	3712.0	3712.0	3712.0	3712.0	3712.0	3712.0
2.5	3696.0	3676.8	3603.2	3564.8	3401.6	3408.0	3553.6	3640.0	3699.2
5.0	3568.0	3475.2	3220.8	3081.6	2883.2	2856.0	3148.8	3403.2	3564.8
7.5	3398.4	3185.6	2729.6	2499.2	2312.0	2280.0	2644.8	3080.0	3379.2
10.0	3203.2	2848.0	2248.0	1979.2	1824.0	1806.4	2171.2	2747.2	3195.2
12.5	2990.4	2510.4	1836.8	1585.6	1470.4	1454.4	1774.4	2424.0	2988.8
15.0	2756.8	2187.2	1508.8	1296.0	1214.4	1196.8	1464.0	2096.0	2747.2
17.5	2518.4	1880.0	1260.8	1076.8	1011.2	993.6	1220.8	1795.2	2508.8
20.0	2276.8	1609.6	1057.6	894.4	852.8	825.6	1022.4	1536.0	2268.8
22.5	2030.4	1372.8	889.6	761.6	758.4	718.4	849.6	1305.6	2025.6
25.0	1776.0	1160.0	736.0	675.2	659.2	628.8	705.6	1099.2	1769.6
27.5	1539.2	977.6	622.4	582.4	593.6	539.2	601.6	926.4	1537.6
30.0	1308.8	822.4	534.4	515.2	545.6	483.2	518.4	777.6	1308.8
32.5	1094.4	684.8	454.4	465.6	496.0	435.2	435.2	644.8	1089.6
35.0	888.0	561.6	377.6	412.8	452.8	385.6	366.4	523.2	880.0
37.5	694.4	446.4	326.4	371.2	414.4	344.0	315.2	412.8	686.4
40.0	515.2	344.0	275.2	328.0	377.6	305.6	264.0	320.0	510.4
42.5	353.6	260.8	228.8	291.2	345.6	270.4	219.2	238.4	352.0
45.0	211.2	184.0	185.6	257.6	315.2	240.0	177.6	166.4	209.6
47.5	104.0	118.4	145.6	225.6	283.2	208.0	140.8	104.0	104.0
50.0	62.4	67.2	112.0	192.0	248.0	176.0	107.2	57.6	62.4
52.5	48.0	44.8	80.0	161.6	216.0	145.6	78.4	40.0	48.0
55.0	36.8	35.2	56.0	129.6	187.2	120.0	52.8	32.0	40.0
57.5	28.8	28.8	36.8	105.6	161.6	96.0	36.8	27.2	32.0
60.0	24.0	22.4	27.2	83.2	136.0	75.2	27.2	20.8	24.0
62.5	16.0	19.2	20.8	62.4	108.8	56.0	20.8	14.4	16.0
65.0	12.8	12.8	16.0	46.4	83.2	40.0	14.4	12.8	12.8
67.5	11.2	11.2	12.8	30.4	59.2	28.8	12.8	11.2	8.0
70.0	8.0	8.0	9.6	20.8	36.8	19.2	9.6	8.0	8.0
72.5	4.8	6.4	6.4	14.4	22.4	12.8	6.4	4.8	4.8
75.0	3.2	4.8	4.8	11.2	16.0	8.0	4.8	4.8	4.8
77.5	3.2	3.2	4.8	6.4	9.6	4.8	3.2	3.2	3.2
80.0	0.0	0.0	1.6	4.8	4.8	3.2	0.0	1.6	0.0
82.5	0.0	0.0	0.0	1.6	3.2	0.0	0.0	0.0	0.0
85.0	0.0	0.0	0.0	0.0	1.6	0.0	0.0	0.0	0.0
87.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B1GB-WH-HO.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	758.31	N.A.	42.50
0-30	1188.69	N.A.	66.60
0-40	1500.68	N.A.	84.00
0-60	1746.68	N.A.	97.80
0-80	1785.49	N.A.	100.00
0-90	1785.98	N.A.	100.00
10-90	1507.71	N.A.	84.40
20-40	742.37	N.A.	41.60
20-50	913.09	N.A.	51.10
40-70	276.81	N.A.	15.50
60-80	38.81	N.A.	2.20
70-80	7.99	N.A.	0.40
80-90	0.49	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1785.98	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	278.27
10-20	480.04
20-30	430.38
30-40	311.99
40-50	170.72
50-60	75.28
60-70	30.81
70-80	7.99
80-90	0.49
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B1GB-WH-HO.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0	
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	0
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93	0
2	107	102	98	95	105	101	97	93	97	94	91	94	92	89	92	89	88	86	0
3	102	95	90	86	100	94	89	85	91	87	84	89	85	82	86	84	81	80	0
4	96	89	83	79	95	87	82	78	85	81	77	83	79	76	81	78	75	74	0
5	92	83	77	73	90	82	76	72	80	75	72	79	74	71	77	73	70	69	0
6	87	78	72	67	85	77	71	67	76	70	67	74	70	66	73	69	66	64	0
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60	0
8	79	69	63	59	78	69	63	59	68	62	59	67	62	58	66	61	58	57	0
9	75	66	60	56	74	65	59	56	64	59	55	63	59	55	62	58	55	54	0
10	72	62	57	53	71	62	56	53	61	56	52	60	56	52	60	55	52	51	0


IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B1GB-WH-HO.IES

UGR TABLE - CORRECTED

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	2.1	3.0	2.2	3.3	3.6	13.0	14.1	13.3	14.4	14.7
	3H	2.2	3.2	2.6	3.5	3.9	13.5	14.5	13.9	14.8	15.2
	4H	2.2	3.1	2.6	3.5	3.9	13.5	14.4	13.9	14.8	15.2
	6H	2.1	3.0	2.6	3.4	3.7	13.5	14.3	13.9	14.7	15.1
	8H	2.1	2.9	2.5	3.3	3.7	13.4	14.2	13.9	14.6	15.0
	12H	2.1	2.8	2.5	3.2	3.6	13.4	14.1	13.8	14.5	14.9
4H	2H	2.1	3.0	2.5	3.4	3.7	12.7	13.6	13.1	14.0	14.4
	3H	2.5	3.3	2.9	3.7	4.1	13.3	14.0	13.7	14.4	14.8
	4H	2.6	3.2	3.0	3.6	4.1	13.3	13.9	13.7	14.4	14.8
	6H	2.5	3.1	3.0	3.5	4.0	13.2	13.8	13.7	14.3	14.7
	8H	2.4	3.0	2.9	3.4	3.9	13.2	13.7	13.7	14.2	14.6
	12H	2.4	2.8	2.9	3.3	3.8	13.1	13.6	13.6	14.1	14.6
8H	4H	2.6	3.2	3.1	3.6	4.1	13.1	13.6	13.6	14.1	14.6
	6H	2.6	3.0	3.1	3.5	4.0	13.1	13.5	13.6	14.0	14.5
	8H	2.5	2.9	3.0	3.4	3.9	13.0	13.4	13.5	13.9	14.4
	12H	2.4	2.8	3.0	3.3	3.9	13.0	13.3	13.5	13.8	14.4
12H	4H	2.6	3.1	3.1	3.5	4.0	13.1	13.5	13.5	14.0	14.5
	6H	2.5	2.9	3.1	3.4	3.9	13.0	13.4	13.5	13.8	14.4
	8H	2.5	2.8	3.0	3.3	3.9	13.0	13.3	13.5	13.8	14.4

Maximum UGR = 15.2

POLAR GRAPH

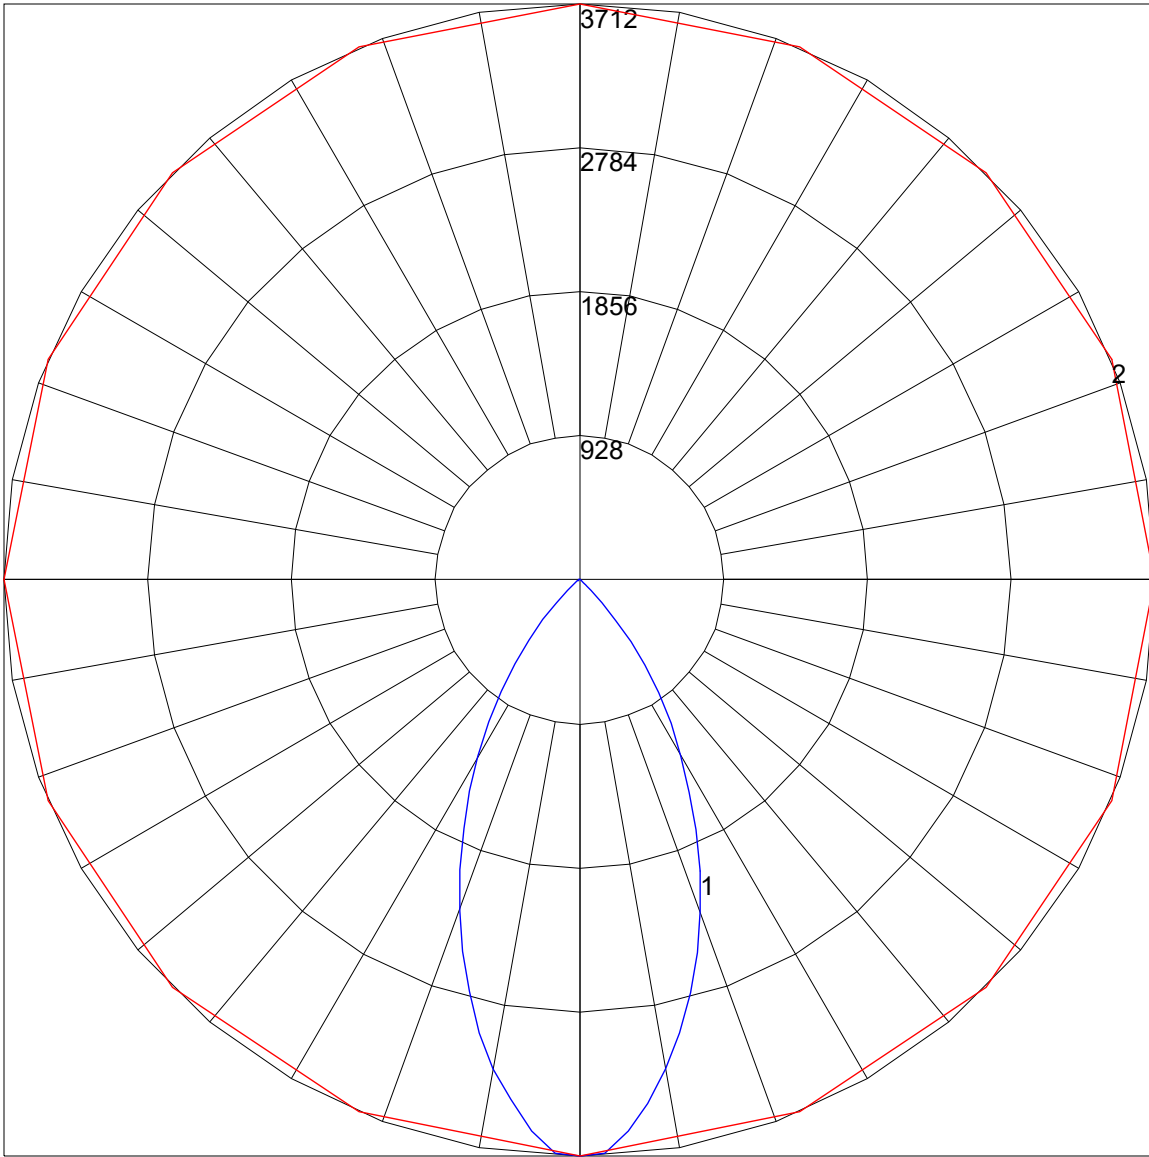

Maximum Candela = 3712 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)