

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B2GB-WH-HO.IES**

**DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
[TEST] L072410602 (SOURCE REPORT BASED FOR REFERENCE)  
[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB  
[ISSUE DATE] 8/26/2024  
[MANUFAC] Vode Lighting LLC  
[LUMCAT] 707-Z2-48-Z-359-B2GB-WH-HO  
[LUMINAIRE] ZipTwo LED, 48", 3500K, 90 CRI, Zipper Board, 60° Graphite Baffle, White Finish, High Output  
[MORE] 3535 Low Glare, High Output, White  
[TEST PROCEDURE] IESNA:LM-79-19

**CHARACTERISTICS**

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1857
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	47
Total Luminaire Watts	39.4
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.82
Spacing Criterion (90-270)	0.90
Spacing Criterion (Diagonal)	0.88
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	4.00 ft
Luminous Width (90-270)	0.13 ft
Luminous Height	0.00 ft

**LUMINANCE DATA (cd/sq.m)**

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4867	6177	9078
55	1442	2134	7038
65	783	940	3993
75	639	639	1406
85	0	380	380

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B2GB-WH-HO.IES**

**CANDELA TABULATION**

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>
<b>0</b>	1835.2	1835.2	1835.2	1835.2	1835.2	1835.2	1835.2	1835.2	1835.2
<b>5</b>	1768.0	1798.4	1819.2	1848.0	1859.2	1868.8	1822.4	1764.8	1779.2
<b>10</b>	1617.6	1704.0	1819.2	1944.0	2017.6	1971.2	1808.0	1646.4	1620.8
<b>15</b>	1432.0	1566.4	1784.0	1985.6	2067.2	1908.8	1774.4	1505.6	1432.0
<b>20</b>	1244.8	1427.2	1588.8	1691.2	1643.2	1496.0	1592.0	1352.0	1233.6
<b>25</b>	1032.0	1240.0	1240.0	1196.8	1048.0	1022.4	1219.2	1156.8	1022.4
<b>30</b>	804.8	1019.2	857.6	766.4	673.6	638.4	860.8	913.6	808.0
<b>35</b>	587.2	752.0	563.2	502.4	486.4	433.6	564.8	643.2	590.4
<b>40</b>	368.0	472.0	350.4	353.6	377.6	313.6	352.0	392.0	377.6
<b>45</b>	166.4	254.4	211.2	267.2	310.4	236.8	216.0	185.6	174.4
<b>50</b>	59.2	92.8	120.0	203.2	257.6	177.6	124.8	62.4	59.2
<b>55</b>	40.0	41.6	59.2	145.6	195.2	126.4	62.4	36.8	40.0
<b>60</b>	27.2	27.2	30.4	92.8	137.6	76.8	32.0	22.4	27.2
<b>65</b>	16.0	19.2	19.2	52.8	81.6	40.0	20.8	16.0	16.0
<b>70</b>	11.2	11.2	11.2	25.6	38.4	20.8	12.8	11.2	11.2
<b>75</b>	8.0	6.4	8.0	12.8	17.6	12.8	6.4	6.4	4.8
<b>80</b>	3.2	3.2	4.8	6.4	8.0	4.8	4.8	3.2	4.8
<b>85</b>	0.0	0.0	1.6	3.2	1.6	1.6	1.6	0.0	0.0
<b>90</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B2GB-WH-HO.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	653.86	N.A.	35.20
0-30	1179.68	N.A.	63.50
0-40	1540.25	N.A.	83.00
0-60	1809.06	N.A.	97.40
0-80	1854.65	N.A.	99.90
0-90	1856.64	N.A.	100.00
10-90	1682.9	N.A.	90.60
20-40	886.39	N.A.	47.70
20-50	1072.82	N.A.	57.80
40-70	303.36	N.A.	16.30
60-80	45.59	N.A.	2.50
70-80	11.04	N.A.	0.60
80-90	1.99	N.A.	0.10
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1856.64	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	173.74
10-20	480.12
20-30	525.81
30-40	360.57
40-50	186.43
50-60	82.38
60-70	34.55
70-80	11.04
80-90	1.99
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B2GB-WH-HO.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0	
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	0
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	0
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	90	88	86	85	0
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78	0
4	95	87	81	76	93	86	80	76	83	79	75	81	77	74	79	76	73	71	0
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66	0
6	85	75	69	64	83	74	68	64	73	68	64	71	67	63	70	66	63	61	0
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57	0
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53	0
9	72	62	56	52	71	62	56	52	61	55	51	60	55	51	59	54	51	50	0
10	69	59	52	48	68	58	52	48	57	52	48	57	52	48	56	51	48	47	0


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B2GB-WH-HO.IES**

**UGR TABLE - CORRECTED**

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	6.1	7.2	6.4	7.5	7.8	14.8	15.9	15.2	16.2	16.6
	3H	6.8	7.7	7.1	8.1	8.4	15.3	16.3	15.7	16.6	17.0
	4H	7.0	7.9	7.4	8.3	8.7	15.4	16.3	15.8	16.7	17.0
	6H	7.1	7.9	7.5	8.3	8.7	15.4	16.2	15.8	16.6	17.0
	8H	7.1	7.9	7.5	8.3	8.7	15.4	16.1	15.8	16.5	16.9
	12H	7.0	7.8	7.5	8.2	8.6	15.3	16.1	15.7	16.4	16.9
4H	2H	6.3	7.2	6.7	7.6	8.0	14.6	15.5	15.0	15.9	16.2
	3H	7.2	7.9	7.6	8.3	8.7	15.2	15.9	15.6	16.3	16.7
	4H	7.4	8.1	7.9	8.5	9.0	15.3	15.9	15.7	16.3	16.8
	6H	7.6	8.1	8.1	8.6	9.1	15.3	15.8	15.7	16.3	16.8
	8H	7.6	8.1	8.0	8.5	9.0	15.2	15.8	15.7	16.2	16.7
	12H	7.5	8.0	8.0	8.5	8.9	15.2	15.7	15.7	16.1	16.6
8H	4H	7.6	8.1	8.1	8.6	9.1	15.1	15.6	15.6	16.1	16.6
	6H	7.8	8.2	8.3	8.7	9.2	15.1	15.6	15.6	16.1	16.5
	8H	7.8	8.2	8.3	8.7	9.2	15.1	15.5	15.7	16.0	16.5
	12H	7.8	8.1	8.3	8.6	9.2	15.1	15.4	15.6	15.9	16.5
12H	4H	7.6	8.1	8.1	8.5	9.0	15.0	15.5	15.5	16.0	16.5
	6H	7.8	8.2	8.4	8.7	9.2	15.1	15.5	15.6	15.9	16.5
	8H	7.9	8.2	8.4	8.7	9.3	15.1	15.4	15.6	15.9	16.5

Maximum UGR = 17.0

POLAR GRAPH

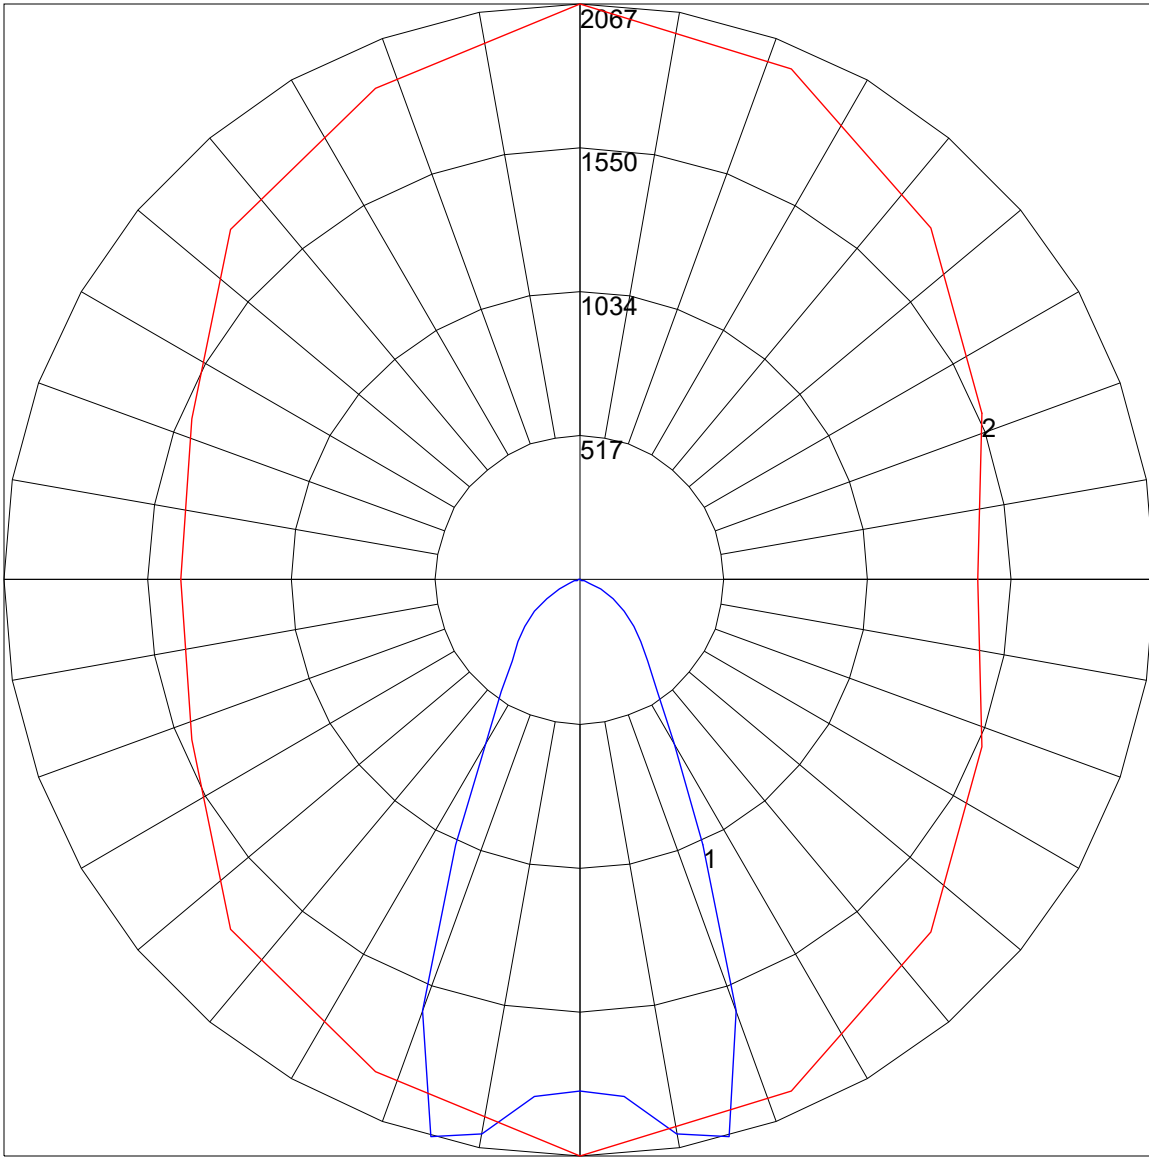

Maximum Candela = 2067.2 Located At Horizontal Angle = 90, Vertical Angle = 15  
# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (15) (Through Max. Cd.)