

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B2WB-WH-SO.IES**

**DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
 [TEST] L072413209 (SOURCE REPORT BASED FOR REFERENCE)  
 [TESTLAB] REPORR BASED ON DATA FROM NVLAP ACCREDITED LAB  
 [ISSUEDATE] 8/26/2024  
 [MANUFAC] Vode Lighting LLC  
 [LUMCAT] 707-Z2-48-Z-359-B2WB-WH-SO  
 [LUMINAIRE] ZipTwo LED, 48", 3500K, 90 CRI, Zipper Board, 60° White Baffle, White Finish, Standard Output  
 [MORE] 3535 Low Glare, Standard Output, White  
 [TEST PROCEDURE] IESNA:LM-79-19

**CHARACTERISTICS**

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1480
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	56
Total Luminaire Watts	26.38
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.94
Spacing Criterion (90-270)	0.90
Spacing Criterion (Diagonal)	0.98
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	4.00 ft
Luminous Width (90-270)	0.13 ft
Luminous Height	0.13 ft

**LUMINANCE DATA (cd/sq.m)**

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	7900	4473	3661
55	5731	3069	2682
65	4496	1906	1595
75	2933	811	624
85	727	128	96

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B2WB-WH-SO.IES**

**CANDELA TABULATION**

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>
<b>0.0</b>	995.40	995.40	995.40	995.40	995.40	995.40	995.40	995.40	995.40
<b>2.5</b>	988.68	990.36	994.56	998.76	1003.80	999.60	994.56	990.36	988.68
<b>5.0</b>	972.72	981.96	996.24	1015.56	1024.80	1014.72	997.08	976.92	971.88
<b>7.5</b>	947.52	965.16	999.60	1037.40	1055.88	1036.56	997.08	954.24	939.12
<b>10.0</b>	911.40	939.96	1002.12	1065.12	1098.72	1062.60	994.56	929.04	908.04
<b>12.5</b>	876.96	913.92	1000.44	1100.40	1145.76	1091.16	992.04	907.20	874.44
<b>15.0</b>	845.04	890.40	1000.44	1131.48	1164.24	1098.72	990.36	881.16	834.96
<b>17.5</b>	801.36	863.52	1000.44	1118.04	1096.20	1044.96	985.32	848.40	792.96
<b>20.0</b>	757.68	829.08	982.80	1025.64	938.28	918.12	955.08	814.80	749.28
<b>22.5</b>	715.68	793.80	929.04	871.08	757.68	755.16	886.20	779.52	707.28
<b>25.0</b>	672.00	757.68	834.96	705.60	604.80	609.84	786.24	740.88	661.92
<b>27.5</b>	624.12	715.68	720.72	572.04	504.00	504.00	674.52	695.52	614.04
<b>30.0</b>	574.56	666.12	608.16	484.68	433.44	430.92	567.84	643.44	567.84
<b>32.5</b>	524.16	608.16	511.56	419.16	380.52	378.84	479.64	585.48	518.28
<b>35.0</b>	476.28	544.32	437.64	369.60	340.20	337.68	411.60	521.64	468.72
<b>37.5</b>	424.20	477.96	379.68	332.64	311.64	306.60	360.36	456.12	418.32
<b>40.0</b>	376.32	415.80	332.64	302.40	288.12	281.40	320.04	394.80	368.76
<b>42.5</b>	326.76	354.48	297.36	279.72	267.96	261.24	285.60	337.68	322.56
<b>45.0</b>	278.88	299.88	264.60	258.72	250.32	241.92	257.88	286.44	273.00
<b>47.5</b>	235.20	254.52	238.56	239.40	232.68	225.12	231.84	241.92	232.68
<b>50.0</b>	205.80	215.04	215.88	221.76	217.56	207.48	210.00	206.64	204.12
<b>52.5</b>	185.64	188.16	194.04	203.28	199.08	189.00	189.00	182.28	184.80
<b>55.0</b>	166.32	168.00	173.88	183.96	180.60	172.20	170.52	162.96	166.32
<b>57.5</b>	149.52	151.20	154.56	164.64	162.12	153.72	152.04	146.16	147.84
<b>60.0</b>	132.72	132.72	134.40	146.16	141.96	135.24	132.72	128.52	131.04
<b>62.5</b>	115.08	115.92	116.76	126.84	123.48	115.92	115.08	110.88	114.24
<b>65.0</b>	98.28	99.96	99.96	106.68	102.48	98.28	98.28	94.92	97.44
<b>67.5</b>	83.16	84.00	83.16	89.04	83.16	79.80	80.64	79.80	83.16
<b>70.0</b>	67.20	68.04	66.36	70.56	64.68	63.84	65.52	63.84	67.20
<b>72.5</b>	53.76	53.76	51.24	53.76	50.40	48.72	50.40	49.56	52.08
<b>75.0</b>	41.16	40.32	37.80	40.32	36.96	35.28	36.96	36.96	39.48
<b>77.5</b>	28.56	28.56	26.88	28.56	25.20	24.36	26.04	25.20	28.56
<b>80.0</b>	18.48	18.48	16.80	19.32	16.80	16.80	16.80	15.96	16.80
<b>82.5</b>	10.08	10.92	10.08	11.76	10.08	10.08	10.08	8.40	10.08
<b>85.0</b>	4.20	5.04	5.04	6.72	5.04	4.20	4.20	4.20	4.20
<b>87.5</b>	0.00	0.84	0.84	1.68	1.68	1.68	0.84	0.00	0.00
<b>90.0</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B2WB-WH-SO.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	372.08	N.A.	25.10
0-30	700.02	N.A.	47.30
0-40	970.75	N.A.	65.60
0-60	1333.13	N.A.	90.00
0-80	1473.76	N.A.	99.50
0-90	1480.46	N.A.	100.00
10-90	1385.18	N.A.	93.60
20-40	598.68	N.A.	40.40
20-50	806.58	N.A.	54.50
40-70	461.44	N.A.	31.20
60-80	140.63	N.A.	9.50
70-80	41.58	N.A.	2.80
80-90	6.69	N.A.	0.50
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1480.46	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	95.28
10-20	276.80
20-30	327.94
30-40	270.73
40-50	207.90
50-60	154.48
60-70	99.06
70-80	41.58
80-90	6.69
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B2WB-WH-SO.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0	
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	
1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89	
2	103	97	91	87	101	95	90	86	92	87	84	89	85	82	86	83	80	78	
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	69	
4	90	80	72	67	87	78	72	66	76	70	66	74	69	65	72	68	64	62	
5	84	73	65	60	82	72	65	59	70	64	59	68	63	58	66	62	58	56	
6	78	67	59	54	77	66	59	54	64	58	53	63	57	53	61	56	53	51	
7	73	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46	
8	69	57	50	45	68	57	50	45	56	49	45	54	49	44	53	48	44	43	
9	65	53	46	41	64	53	46	41	52	46	41	51	45	41	50	45	41	39	
10	62	50	43	38	60	50	43	38	49	42	38	48	42	38	47	42	38	36	


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-359-B2WB-WH-SO.IES**

**UGR TABLE - CORRECTED**

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	13.7	15.1	14.1	15.4	15.7	15.8	17.2	16.2	17.5	17.8
	3H	14.7	15.9	15.0	16.2	16.6	16.9	18.2	17.3	18.5	18.8
	4H	14.9	16.0	15.3	16.4	16.7	17.2	18.3	17.6	18.7	19.1
	6H	14.9	16.0	15.3	16.3	16.7	17.3	18.3	17.7	18.7	19.1
	8H	14.9	15.9	15.3	16.3	16.7	17.3	18.3	17.7	18.7	19.1
	12H	14.9	15.8	15.3	16.2	16.6	17.3	18.2	17.7	18.6	19.0
4H	2H	14.2	15.3	14.6	15.7	16.1	16.0	17.1	16.4	17.5	17.9
	3H	15.2	16.2	15.6	16.6	17.0	17.2	18.1	17.6	18.5	18.9
	4H	15.5	16.3	15.9	16.8	17.2	17.5	18.4	17.9	18.8	19.2
	6H	15.6	16.3	16.1	16.8	17.2	17.7	18.4	18.1	18.8	19.3
	8H	15.6	16.2	16.0	16.7	17.2	17.7	18.3	18.1	18.8	19.3
	12H	15.5	16.1	16.0	16.6	17.1	17.7	18.3	18.1	18.7	19.2
8H	4H	15.6	16.2	16.0	16.7	17.2	17.5	18.2	17.9	18.6	19.1
	6H	15.7	16.2	16.2	16.7	17.2	17.6	18.2	18.1	18.7	19.2
	8H	15.6	16.2	16.2	16.7	17.2	17.6	18.1	18.2	18.7	19.2
	12H	15.6	16.1	16.1	16.6	17.1	17.6	18.1	18.2	18.6	19.2
12H	4H	15.6	16.1	16.0	16.6	17.1	17.5	18.0	17.9	18.5	19.0
	6H	15.6	16.1	16.2	16.6	17.2	17.6	18.1	18.1	18.6	19.1
	8H	15.6	16.1	16.1	16.6	17.1	17.6	18.1	18.1	18.6	19.1

Maximum UGR = 19.3

POLAR GRAPH

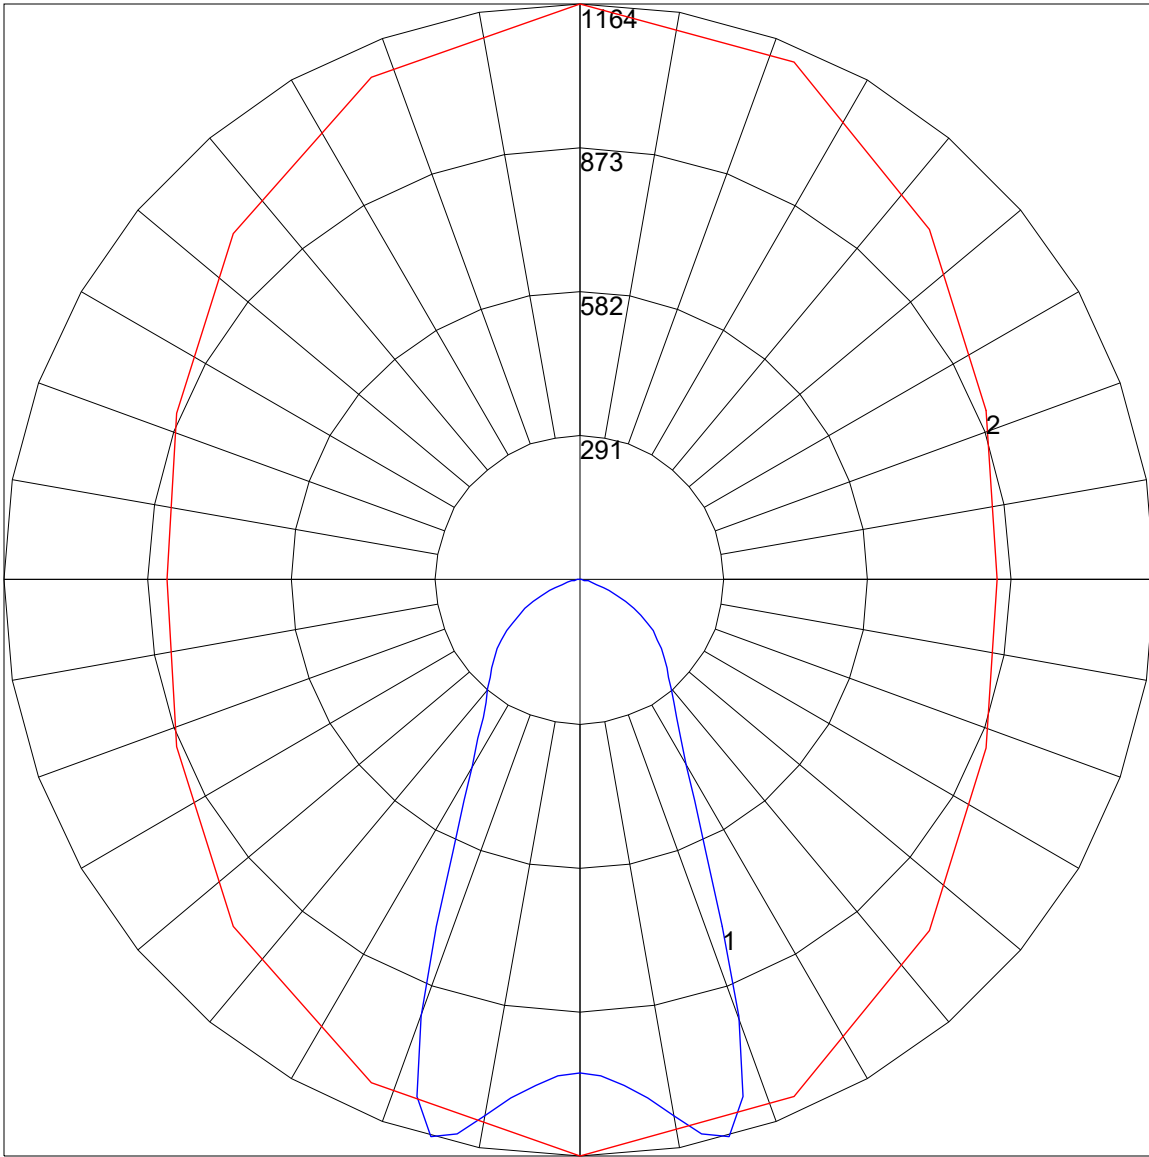

Maximum Candela = 1164.24 Located At Horizontal Angle = 90, Vertical Angle = 15  
# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (15) (Through Max. Cd.)