

## IES Report




DoubleBox™ | 107 | 120° Batwing, up | 40° Symmetric, down | 80 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	65	67	68	70
Total Lumens, 4' rail length (1219mm)	1925	1986	2026	2067
Lumens per foot (305mm)	481	496	507	517
Lumens per foot UP (305mm)	349	360	367	375
Lumens per foot DOWN (305mm)	132	137	139	142
Input Power (W), 4' rail length (1219mm)	29.9	29.9	29.9	29.9
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

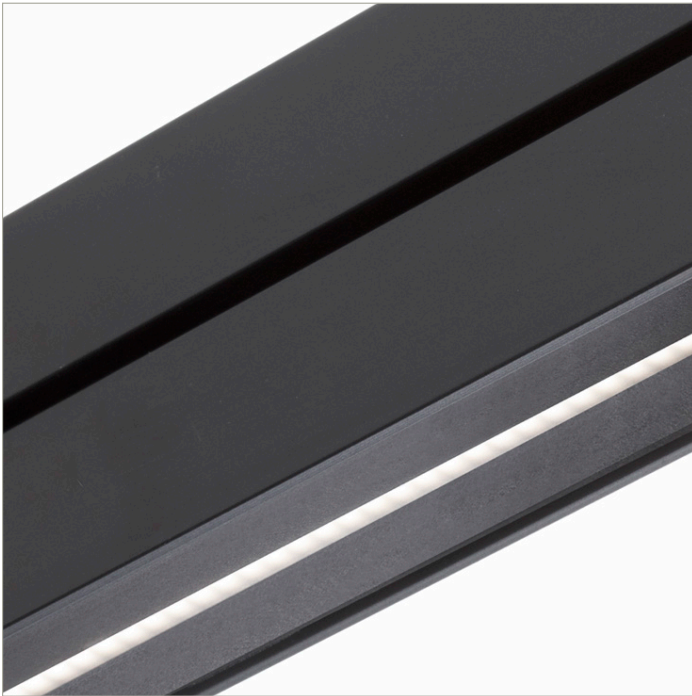

**IES Report**



DoubleBox™ | 107 | 120° Batwing, up | 40° Symmetric, down | 80 CRI | SO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-G1S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	81	83	85	86
Total Lumens, 4' rail length (1219mm)	3850	3971	4052	4133
Lumens per foot (305mm)	962	993	1013	1033
Lumens per foot UP (305mm)	698	720	735	750
Lumens per foot DOWN (305mm)	265	273	278	284
Input Power (W), 4' rail length (1219mm)	48.1	48.1	48.1	48.1
Watts per foot (305mm)	12.1	12.1	12.1	12.1
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



**IES Report**




**DoubleBox™ | 107 | 120° Batwing, up | 40° Symmetric down | 80 CRI | HO**

**107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-G1S1-X-BL-X**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	75	77	79	80
Total Lumens, 4' rail length (1219mm)	7314	7545	7699	7853
Lumens per foot (305mm)	1829	1886	1925	1963
Lumens per foot UP (305mm)	1326	1368	1396	1424
Lumens per foot DOWN (305mm)	502	518	529	540
Input Power (W), 4' rail length (1219mm)	98.4	98.4	98.4	98.4
Watts per foot (305mm)	24.7	24.7	24.7	24.7
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

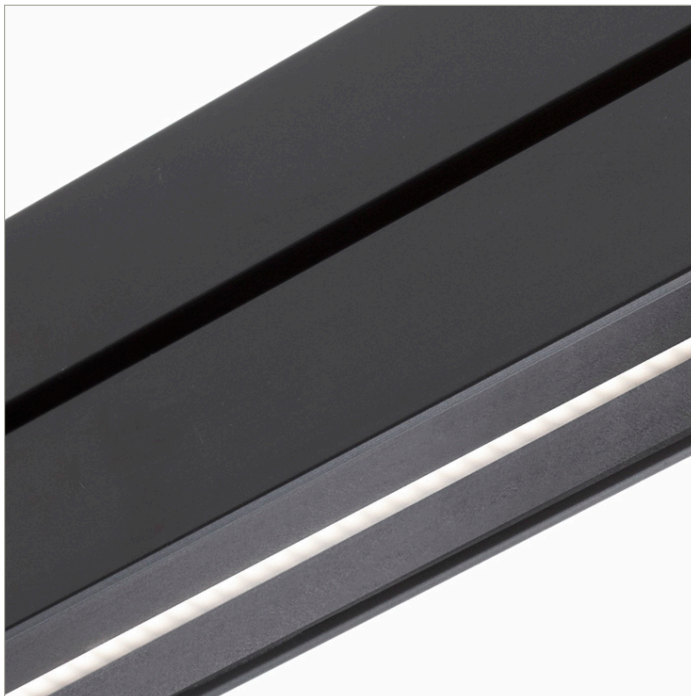

## IES Report




DoubleBox™ | 107 | 120° Batwing, up | 40° Symmetric down | 90 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-G1S1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	56	58	59	60
Total Lumens, 4' rail length (1219mm)	1659	1712	1747	1782
Lumens per foot (305mm)	415	428	437	445
Lumens per foot UP (305mm)	301	310	317	323
Lumens per foot DOWN (305mm)	114	118	120	122
Input Power (W), 4' rail length (1219mm)	29.9	29.9	29.9	29.9
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

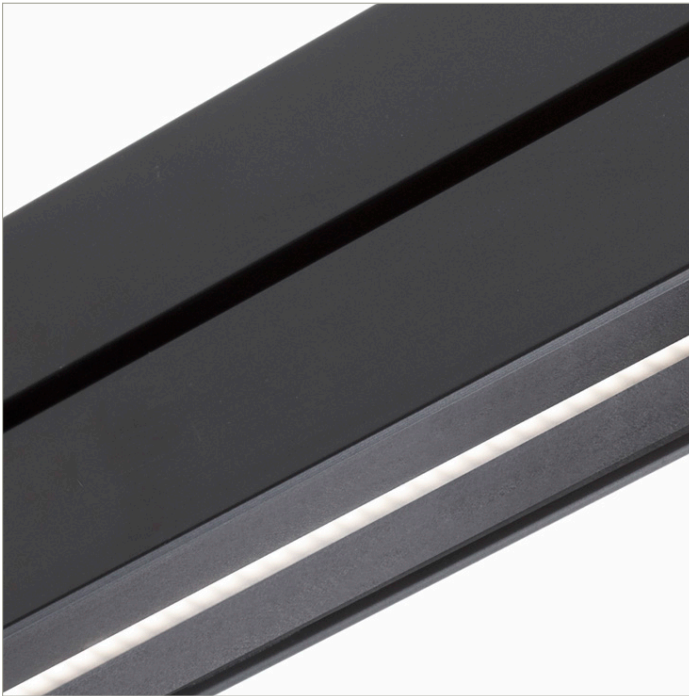

**IES Report**

**DoubleBox™ | 107 | 120° Batwing, up | 40° Symmetric down | 90 CRI | SO**




**107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-G1S1-X-BL-X**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	69	72	73	75
Total Lumens, 4' rail length (1219mm)	3319	3423	3493	3563
Lumens per foot (305mm)	830	856	873	891
Lumens per foot UP (305mm)	602	621	634	646
Lumens per foot DOWN (305mm)	228	235	240	245
Input Power (W), 4' rail length (1219mm)	48.14	48.14	48.14	48.14
Watts per foot (305mm)	12.1	12.1	12.1	12.1
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



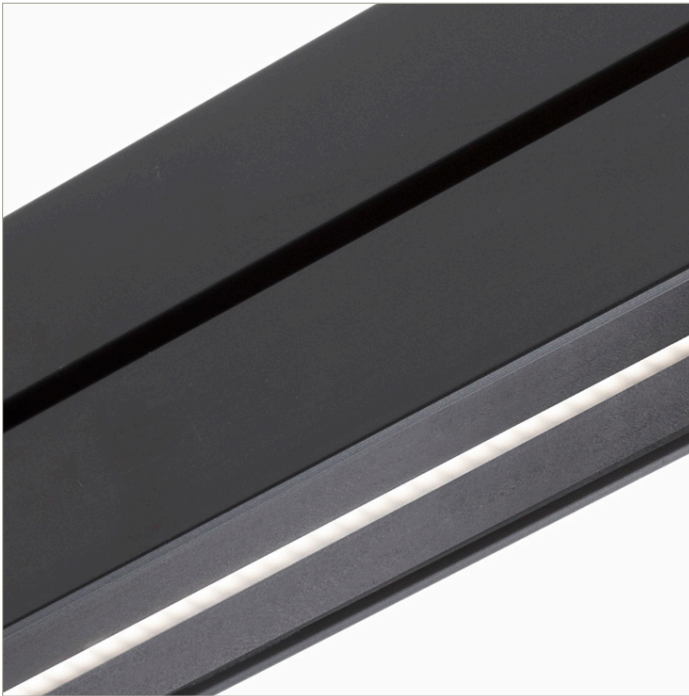

## IES Report

DoubleBox™ | 107 | 120° Batwing, up | 40° Symmetric down | 90 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-G1S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	65	67	68	69
Total Lumens, 4' rail length (1219mm)	6305	6505	6637	6770
Lumens per foot (305mm)	1576	1626	1659	1693
Lumens per foot UP (305mm)	1143	1180	1204	1228
Lumens per foot DOWN (305mm)	433	447	456	465
Input Power (W), 4' rail length (1219mm)	98.44	98.44	98.44	98.44
Watts per foot (305mm)	24.7	24.7	24.7	24.7
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).