

IES Report




DoubleBox™ | 107 | 120° Batwing, up | Black Baffle, down | 80 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	64	66	68	69
Total Lumens, 4' rail length (1219mm)	1908	1968	2008	2049
Lumens per foot (305mm)	477	492	502	512
Lumens per foot UP (305mm)	372	384	392	400
Lumens per foot DOWN (305mm)	105	108	111	113
Input Power (W), 4' rail length (1219mm)	29.9	29.9	29.9	29.9
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

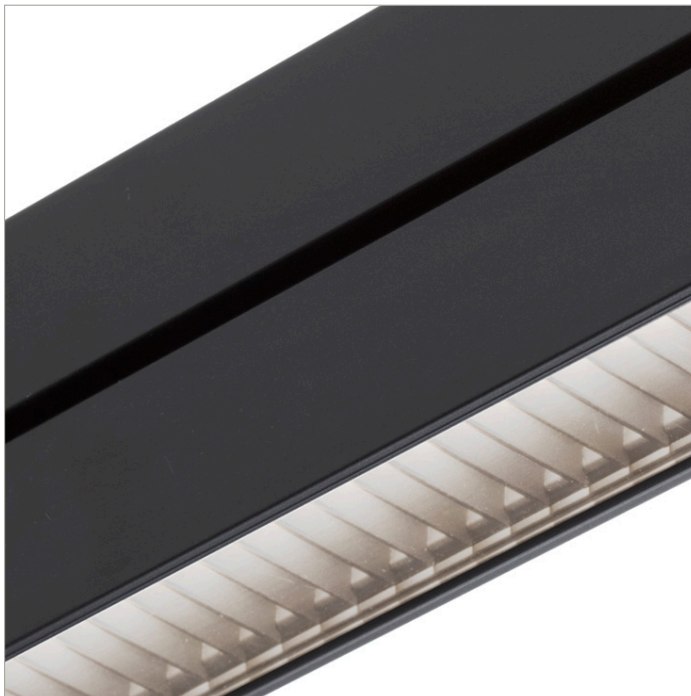

IES Report




DoubleBox™ | 107 | 120° Batwing, up | Black Baffle, down | 80 CRI | SO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-G1BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	80	82	84	86
Total Lumens, 4' rail length (1219mm)	3816	3937	4017	4097
Lumens per foot (305mm)	954	984	1004	1024
Lumens per foot UP (305mm)	744	768	783	799
Lumens per foot DOWN (305mm)	210	217	221	226
Input Power (W), 4' rail length (1219mm)	48.1	48.1	48.1	48.1
Watts per foot (305mm)	12.1	12.1	12.1	12.1
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

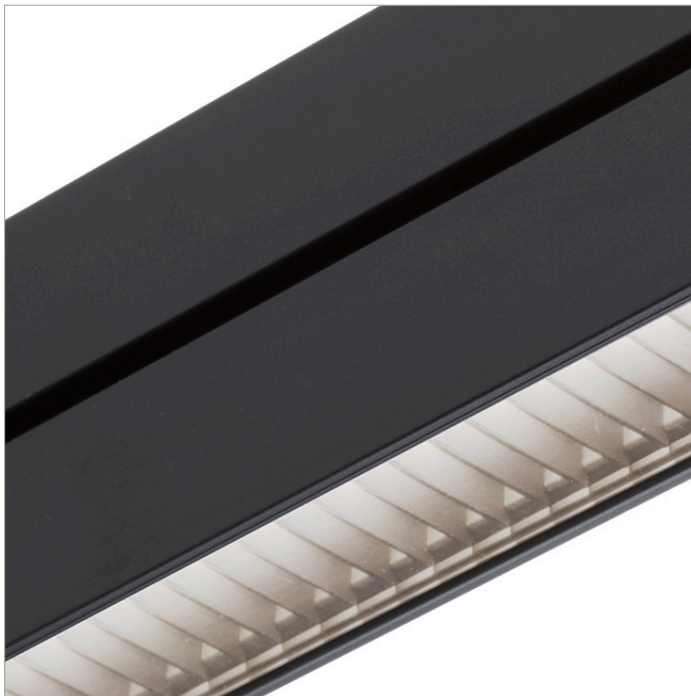

IES Report




DoubleBox™ | 107 | 120° Batwing, up | Black Baffle, down | 80 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-G1BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	74	76	78	80
Total Lumens, 4' rail length (1219mm)	7251	7480	7632	7785
Lumens per foot (305mm)	1813	1870	1908	1946
Lumens per foot UP (305mm)	1414	1459	1488	1518
Lumens per foot DOWN (305mm)	399	412	420	428
Input Power (W), 4' rail length (1219mm)	98.4	98.4	98.4	98.4
Watts per foot (305mm)	24.7	24.7	24.7	24.7
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

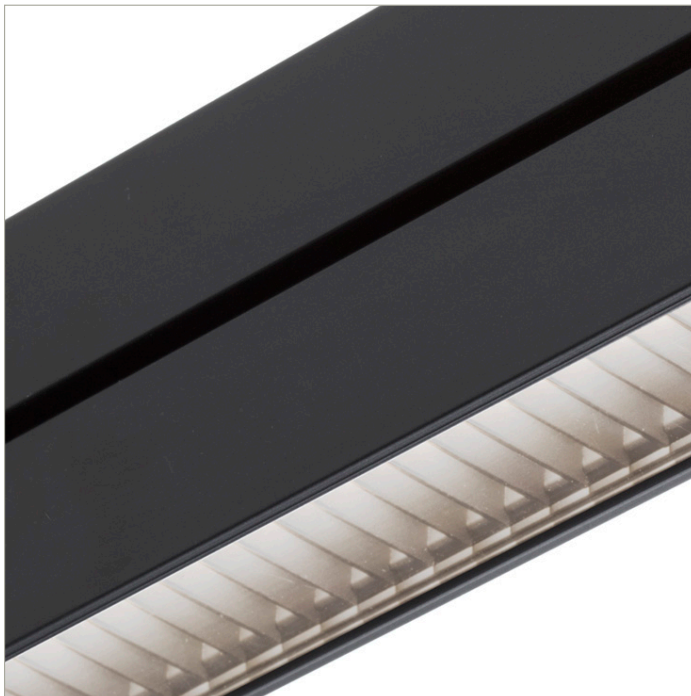

IES Report




DoubleBox™ | 107 | 120° Batwing, up | Black Baffle, down | 90 CRI | LO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-G1BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	56	57	58	60
Total Lumens, 4' rail length (1219mm)	1645	1697	1731	1766
Lumens per foot (305mm)	411	424	433	442
Lumens per foot UP (305mm)	321	331	338	344
Lumens per foot DOWN (305mm)	91	93	95	97
Input Power (W), 4' rail length (1219mm)	29.9	29.9	29.9	29.9
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

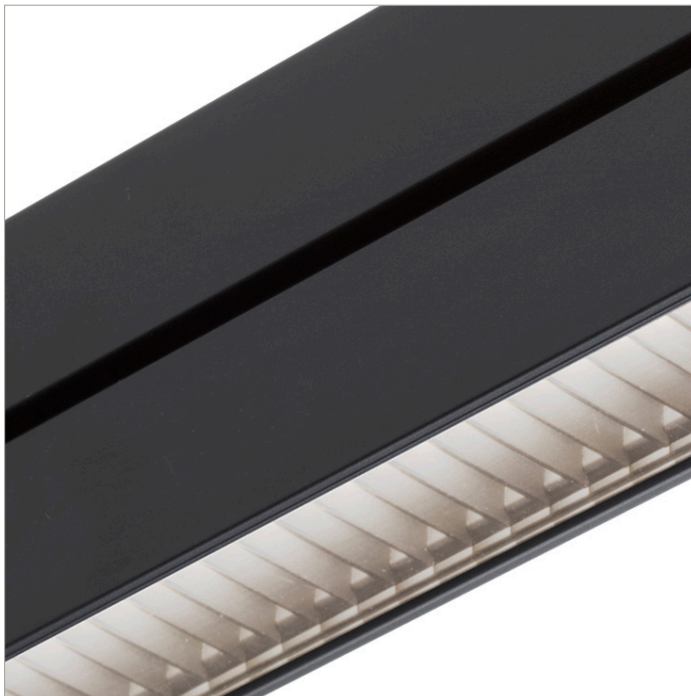

IES Report




DoubleBox™ | 107 | 120° Batwing, up | Black Baffle, down | 90 CRI | SO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-G1BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	69	71	72	74
Total Lumens, 4' rail length (1219mm)	3290	3394	3463	3532
Lumens per foot (305mm)	822	848	866	883
Lumens per foot UP (305mm)	642	662	675	689
Lumens per foot DOWN (305mm)	181	187	191	194
Input Power (W), 4' rail length (1219mm)	48.17	48.17	48.17	48.17
Watts per foot (305mm)	12.1	12.1	12.1	12.1
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

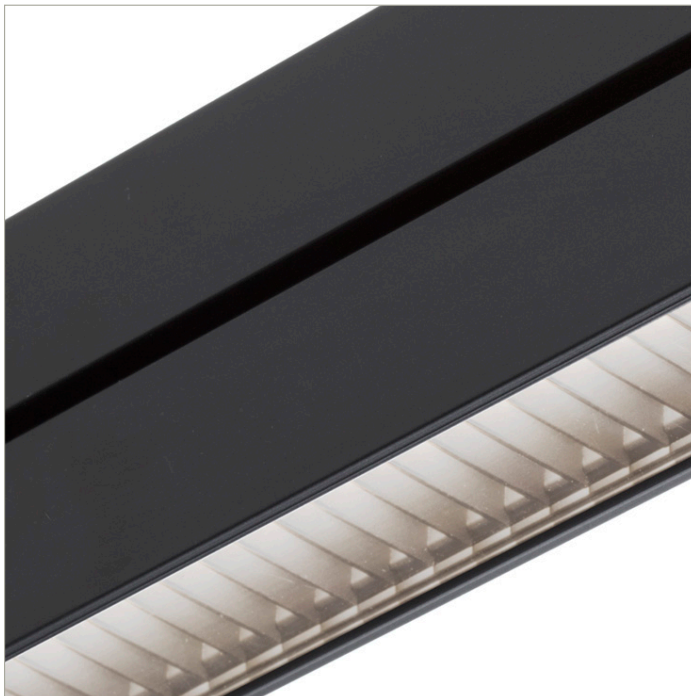

IES Report

DoubleBox™ | 107 | 120° Batwing, up | Black Baffle, down | 90 CRI | HO

107-DB-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-G1BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	64	66	67	69
Total Lumens, 4' rail length (1219mm)	6251	6448	6580	6711
Lumens per foot (305mm)	1563	1612	1645	1678
Lumens per foot UP (305mm)	1219	1257	1283	1309
Lumens per foot DOWN (305mm)	344	355	362	369
Input Power (W), 4' rail length (1219mm)	98.44	98.44	98.44	98.44
Watts per foot (305mm)	24.7	24.7	24.7	24.7
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).