

IES Report



ZipThree® | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 80 CRI | LO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-LO-35-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	80	82	84	86
Total Lumens, 4' rail length (1219mm)	2441	2518	2569	2621
Lumens per foot (305mm)	610	629	642	655
Lumens per foot UP (305mm)	423	436	445	454
Lumens per foot DOWN (305mm)	187	193	197	201
Input Power (W), 4' rail length (1219mm)	30.8	30.8	30.8	30.8
Watts per foot (305mm)	7.8	7.8	7.8	7.8
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.



IES Report



ZipThree[®] | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 80 CRI | SO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-SO-35-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	96	99	101	103
Total Lumens, 4' rail length (1219mm)	4881	5035	5138	5241
Lumens per foot (305mm)	1220	1259	1285	1310
Lumens per foot UP (305mm)	846	873	891	909
Lumens per foot DOWN (305mm)	374	386	394	402
Input Power (W), 4' rail length (1219mm)	51.2	51.2	51.2	51.2
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report




ZipThree® | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 80 CRI | HO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-HO-35-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	87	90	92	93
Total Lumens, 4' rail length (1219mm)	9275	9567	9763	9958
Lumens per foot (305mm)	2319	2392	2441	2489
Lumens per foot UP (305mm)	1608	1659	1693	1640
Lumens per foot DOWN (305mm)	711	733	748	725
Input Power (W), 4' rail length (1219mm)	107.2	107.2	107.2	107.2
Watts per foot (305mm)	26.8	26.8	26.8	26.8
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.

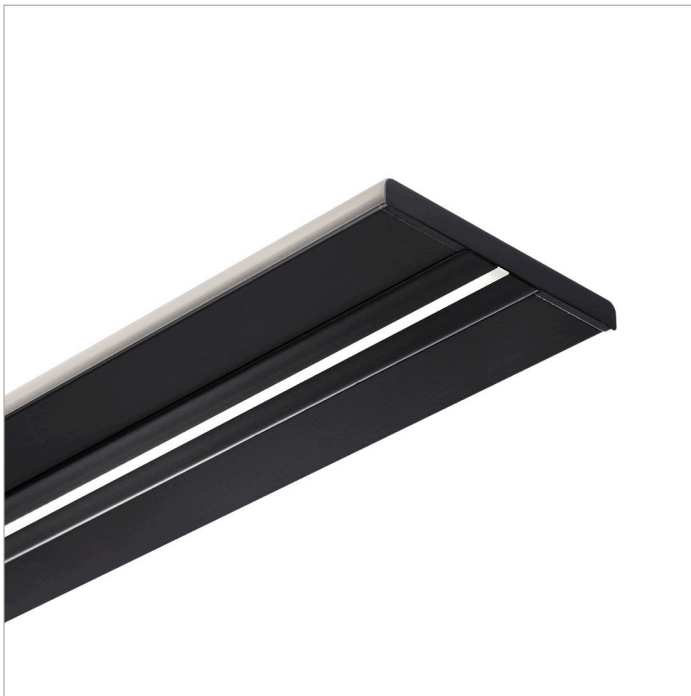

IES Report



ZipThree® | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 90 CRI | LO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-LO-359-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	69	71	72	75
Total Lumens, 4' rail length (1219mm)	2104	2170	2215	2259
Lumens per foot (305mm)	526	543	554	565
Lumens per foot UP (305mm)	365	376	384	392
Lumens per foot DOWN (305mm)	161	166	170	173
Input Power (W), 4' rail length (1219mm)	30.8	30.8	30.8	30.8
Watts per foot (305mm)	7.8	7.8	7.8	7.8
CRI*	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.



IES Report



ZipThree® | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 90 CRI | SO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-SO-359-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	83	85	87	90
Total Lumens, 4' rail length (1219mm)	4208	4341	4430	4518
Lumens per foot (305mm)	1052	1085	1107	1130
Lumens per foot UP (305mm)	730	753	768	783
Lumens per foot DOWN (305mm)	322	333	339	346
Input Power (W), 4' rail length (1219mm)	51.2	51.2	51.2	51.2
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI*	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.



IES Report

ZipThree® | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 90 CRI | HO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-HO-359-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	75	77	79	82
Total Lumens, 4' rail length (1219mm)	7995	8248	8416	8584
Lumens per foot (305mm)	1999	2062	2104	2146
Lumens per foot UP (305mm)	1386	1430	1459	1414
Lumens per foot DOWN (305mm)	613	632	645	625
Input Power (W), 4' rail length (1219mm)	107.2	107.2	107.2	107.2
Watts per foot (305mm)	26.8	26.8	26.8	26.8
CRI*	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.