

IES Report

Nexa™ | 3.25” Honeycomb Louver | 807 | 80 CRI | VLO

807-NX3-XX-4-48-XX-XX-XX-XX-XX-Z-VLO-35-HL-XX-AL-X

|  | 2700K | 3000K | 3500K | 4000K |
|--|-------|-------|-------|-------|
| Efficacy - Lumens per Watt               | 100   | 103   | 105   | 105   |
| Total Lumens, 4' rail length (1219mm)    | 826   | 852   | 869   | 869   |
| Lumens per foot (305mm)                  | 206   | 213   | 217   | 217   |
| Input Power (W), 4' rail length (1219mm) | 8.3   | 8.3   | 8.3   | 8.3   |
| Watts per foot (305mm)                   | 2.1   | 2.1   | 2.1   | 2.1   |
| CRI                                      | 80    | 80    | 80    | 80    |

Due to the large number of options in Vode’s product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



8165 E. Kaiser Blvd. Anaheim, CA 92808  
www.lightlaboratory.com

## Photometric Test Report

### IES INDOOR REPORT

PHOTOMETRIC FILENAME : L072310202.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L072310202

[TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)

[ISSUEDATE] 7/11/2023

[MANUFAC] Vode Lighting LLC

[LUMCAT] 807-NX3-SL-48-XX-0-XX-XX-2-0-Z-SO-35-HL-0-AL-0

[LUMINAIRE] System 807, Nexa3, Surface, 48", Surface Mount, meanwell driver, 120v-277v, Zipper Board, Standard Output,

[MORE] 3500K 80CRI, Honeycomb Louvre, Clear Anodized

[BALLASTCAT] MEAN WELL HLG-40H-36A

[OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND

[MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.

[INPUT] 120VAC

[TEST PROCEDURE] IESNA:LM-79-19

### CHARACTERISTICS

|                                 |                 |
|---------------------------------|-----------------|
| Lumens Per Lamp                 | N.A. (absolute) |
| Total Lamp Lumens               | N.A. (absolute) |
| Luminaire Lumens                | 3104            |
| Total Luminaire Efficiency      | N.A.            |
| Luminaire Efficacy Rating (LER) | 117             |
| Total Luminaire Watts           | 26.53           |
| Ballast Factor                  | 1.00            |
| CIE Type                        | Direct          |
| Spacing Criterion (0-180)       | 1.10            |
| Spacing Criterion (90-270)      | 1.08            |
| Spacing Criterion (Diagonal)    | 1.18            |
| Basic Luminous Shape            | Rectangular     |
| Luminous Length (0-180)         | 0.27 ft         |
| Luminous Width (90-270)         | 4.00 ft         |
| Luminous Height                 | 0.00 ft         |

### LUMINANCE DATA (cd/sq.m)

| Angle In<br>Degrees | Average<br>0-Deg | Average<br>45-Deg | Average<br>90-Deg |
|---------------------|------------------|-------------------|-------------------|
| 45                  | 10364            | 10547             | 10463             |
| 55                  | 8055             | 8229              | 8124              |
| 65                  | 5348             | 5513              | 5631              |
| 75                  | 4309             | 4386              | 4424              |
| 85                  | 3199             | 3313              | 3199              |

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : L072310202.IES**

**ZONAL LUMEN SUMMARY**

| Zone    | Lumens  | %Lamp | %Fixt  |
|---------|---------|-------|--------|
| 0-20    | 555.89  | N.A.  | 17.90  |
| 0-30    | 1122.63 | N.A.  | 36.20  |
| 0-40    | 1737.41 | N.A.  | 56.00  |
| 0-60    | 2708.34 | N.A.  | 87.20  |
| 0-80    | 3070.88 | N.A.  | 98.90  |
| 0-90    | 3104.39 | N.A.  | 100.00 |
| 10-90   | 2954.61 | N.A.  | 95.20  |
| 20-40   | 1181.52 | N.A.  | 38.10  |
| 20-50   | 1739.11 | N.A.  | 56.00  |
| 40-70   | 1211.5  | N.A.  | 39.00  |
| 60-80   | 362.54  | N.A.  | 11.70  |
| 70-80   | 121.97  | N.A.  | 3.90   |
| 80-90   | 33.51   | N.A.  | 1.10   |
| 90-110  | 0.00    | N.A.  | 0.00   |
| 90-120  | 0.00    | N.A.  | 0.00   |
| 90-130  | 0.00    | N.A.  | 0.00   |
| 90-150  | 0.00    | N.A.  | 0.00   |
| 90-180  | 0.00    | N.A.  | 0.00   |
| 110-180 | 0.00    | N.A.  | 0.00   |
| 0-180   | 3104.39 | N.A.  | 100.00 |

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

| Zone    | Lumens |
|---------|--------|
| 0-10    | 149.78 |
| 10-20   | 406.11 |
| 20-30   | 566.74 |
| 30-40   | 614.78 |
| 40-50   | 557.59 |
| 50-60   | 413.34 |
| 60-70   | 240.57 |
| 70-80   | 121.97 |
| 80-90   | 33.51  |
| 90-100  | 0.00   |
| 100-110 | 0.00   |
| 110-120 | 0.00   |
| 120-130 | 0.00   |
| 130-140 | 0.00   |
| 140-150 | 0.00   |
| 150-160 | 0.00   |
| 160-170 | 0.00   |
| 170-180 | 0.00   |

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : L072310202.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

| RC | 80  |     |     |     | 70  |     |     |     | 50  |     |     | 30  |     |     | 10  |     |     | 0   |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RW | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 0   |
| 0  | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1  | 110 | 106 | 102 | 99  | 108 | 104 | 101 | 98  | 100 | 97  | 94  | 96  | 94  | 92  | 92  | 91  | 89  | 87  |
| 2  | 102 | 94  | 88  | 83  | 99  | 92  | 87  | 82  | 89  | 84  | 80  | 86  | 82  | 79  | 83  | 80  | 77  | 75  |
| 3  | 94  | 84  | 77  | 71  | 91  | 83  | 76  | 71  | 80  | 74  | 69  | 77  | 72  | 68  | 75  | 71  | 67  | 65  |
| 4  | 87  | 76  | 68  | 62  | 84  | 74  | 67  | 61  | 72  | 66  | 60  | 70  | 64  | 60  | 68  | 63  | 59  | 57  |
| 5  | 80  | 68  | 60  | 54  | 78  | 67  | 60  | 54  | 65  | 59  | 53  | 63  | 57  | 53  | 62  | 56  | 52  | 50  |
| 6  | 74  | 62  | 54  | 48  | 73  | 61  | 54  | 48  | 60  | 53  | 47  | 58  | 52  | 47  | 56  | 51  | 47  | 45  |
| 7  | 69  | 57  | 49  | 43  | 68  | 56  | 48  | 43  | 55  | 48  | 43  | 53  | 47  | 42  | 52  | 46  | 42  | 40  |
| 8  | 65  | 52  | 44  | 39  | 63  | 52  | 44  | 39  | 50  | 43  | 39  | 49  | 43  | 38  | 48  | 42  | 38  | 36  |
| 9  | 61  | 48  | 41  | 35  | 60  | 48  | 40  | 35  | 47  | 40  | 35  | 46  | 39  | 35  | 45  | 39  | 35  | 33  |
| 10 | 57  | 45  | 37  | 32  | 56  | 44  | 37  | 32  | 43  | 37  | 32  | 42  | 36  | 32  | 42  | 36  | 32  | 30  |

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : L072310202.IES**

**UGR TABLE - CORRECTED**


Reflectances

|                |    |    |    |    |    |    |    |    |    |    |
|----------------|----|----|----|----|----|----|----|----|----|----|
| Ceiling Cavity | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 |
| Walls          | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 |
| Floor Cavity   | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |

| Room Size |      | UGR Viewed Crosswise |      |      |      |      | UGR Viewed Endwise |      |      |      |      |
|-----------|------|----------------------|------|------|------|------|--------------------|------|------|------|------|
| X=2H      | Y=2H | 18.3                 | 19.8 | 18.7 | 20.1 | 20.5 | 18.5               | 20.0 | 18.9 | 20.3 | 20.6 |
|           | 3H   | 19.4                 | 20.8 | 19.8 | 21.1 | 21.4 | 19.6               | 20.9 | 20.0 | 21.2 | 21.6 |
|           | 4H   | 19.8                 | 21.1 | 20.2 | 21.4 | 21.8 | 20.0               | 21.2 | 20.4 | 21.6 | 22.0 |
|           | 6H   | 20.1                 | 21.3 | 20.5 | 21.7 | 22.1 | 20.3               | 21.5 | 20.7 | 21.8 | 22.2 |
|           | 8H   | 20.2                 | 21.3 | 20.7 | 21.7 | 22.1 | 20.4               | 21.5 | 20.8 | 21.9 | 22.3 |
|           | 12H  | 20.3                 | 21.3 | 20.7 | 21.7 | 22.2 | 20.5               | 21.5 | 20.9 | 21.9 | 22.3 |
| 4H        | 2H   | 18.7                 | 20.0 | 19.1 | 20.3 | 20.7 | 18.8               | 20.1 | 19.2 | 20.4 | 20.8 |
|           | 3H   | 20.0                 | 21.0 | 20.4 | 21.4 | 21.8 | 20.1               | 21.2 | 20.6 | 21.6 | 22.0 |
|           | 4H   | 20.5                 | 21.5 | 21.0 | 21.9 | 22.3 | 20.7               | 21.6 | 21.1 | 22.0 | 22.5 |
|           | 6H   | 21.0                 | 21.8 | 21.4 | 22.2 | 22.7 | 21.1               | 21.9 | 21.6 | 22.4 | 22.8 |
|           | 8H   | 21.1                 | 21.9 | 21.6 | 22.3 | 22.8 | 21.3               | 22.0 | 21.7 | 22.5 | 22.9 |
|           | 12H  | 21.2                 | 21.9 | 21.7 | 22.4 | 22.8 | 21.4               | 22.0 | 21.9 | 22.5 | 23.0 |
| 8H        | 4H   | 20.7                 | 21.5 | 21.2 | 21.9 | 22.4 | 20.9               | 21.6 | 21.3 | 22.1 | 22.5 |
|           | 6H   | 21.3                 | 21.9 | 21.8 | 22.4 | 22.9 | 21.4               | 22.0 | 21.9 | 22.5 | 23.0 |
|           | 8H   | 21.5                 | 22.0 | 22.0 | 22.6 | 23.0 | 21.6               | 22.2 | 22.1 | 22.7 | 23.2 |
|           | 12H  | 21.6                 | 22.1 | 22.2 | 22.6 | 23.2 | 21.8               | 22.3 | 22.3 | 22.8 | 23.3 |
| 12H       | 4H   | 20.8                 | 21.4 | 21.2 | 21.9 | 22.4 | 20.9               | 21.5 | 21.4 | 22.0 | 22.5 |
|           | 6H   | 21.3                 | 21.9 | 21.8 | 22.3 | 22.9 | 21.4               | 22.0 | 22.0 | 22.5 | 23.0 |
|           | 8H   | 21.6                 | 22.1 | 22.1 | 22.5 | 23.1 | 21.7               | 22.2 | 22.2 | 22.7 | 23.2 |

Maximum UGR = 23.3

POLAR GRAPH

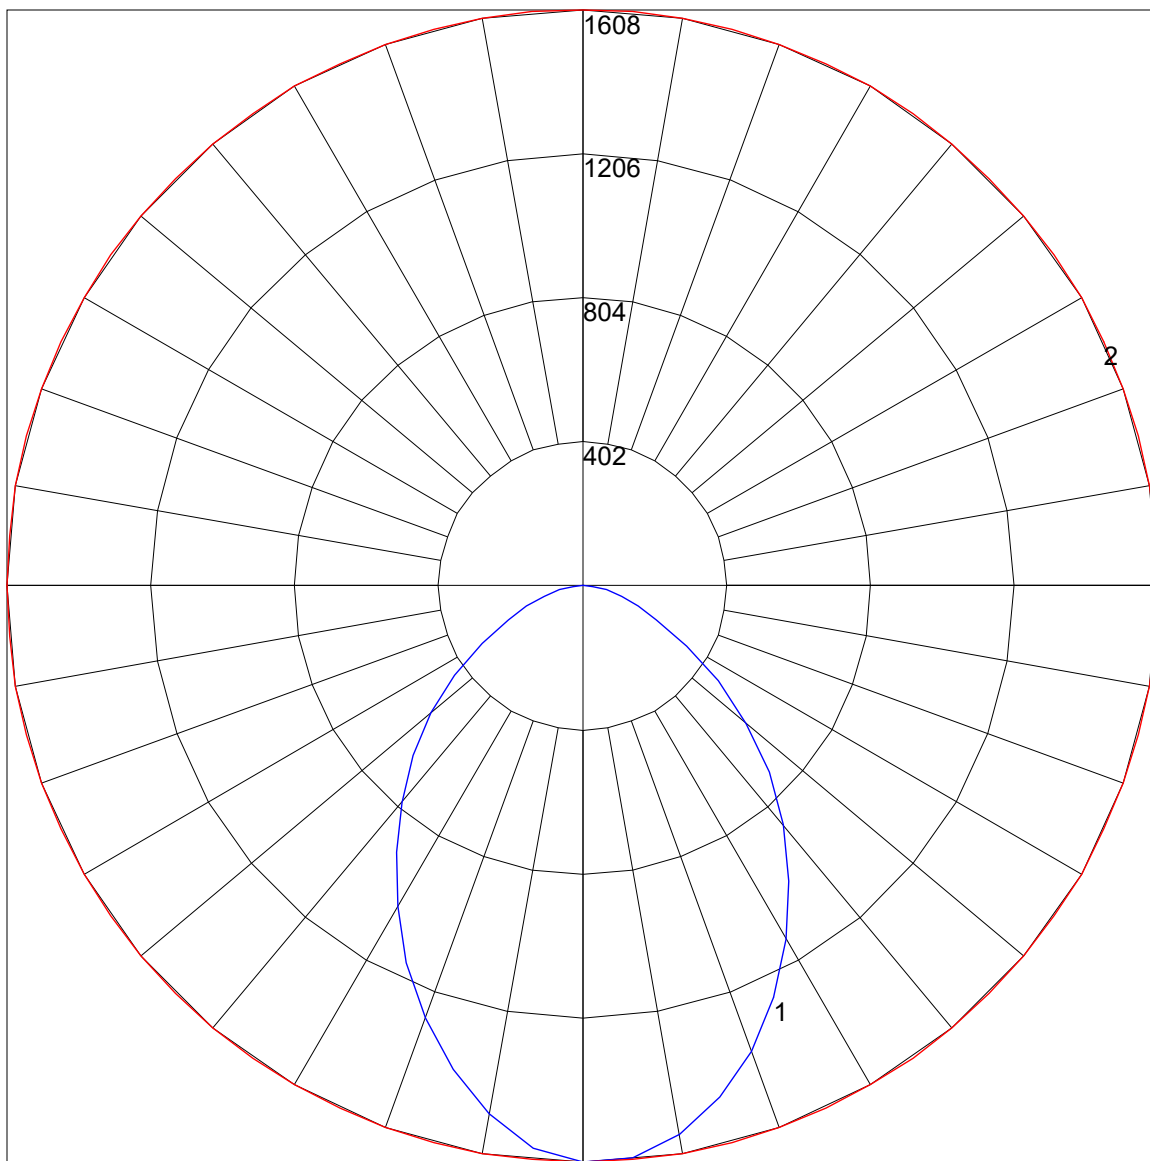

Maximum Candela = 1608 Located At Horizontal Angle = 0, Vertical Angle = 0  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)