




Spec Guide

# WingRail | Ceiling-Wall Arm | 107



Direct or indirect lighting for wall wash, grazing and ceiling wash applications.

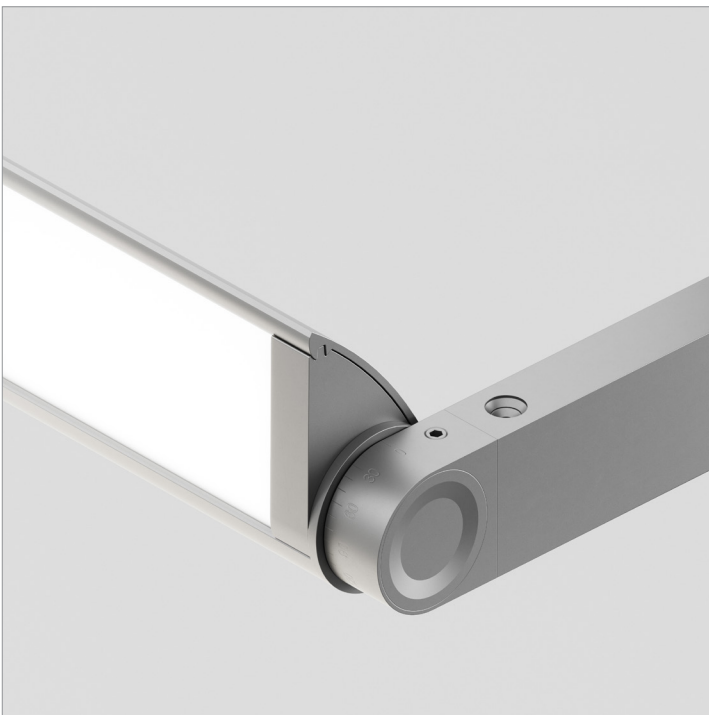

WingRail: direct or indirect, 370° rotation.

### Benefits & Features

#### Minimal Profile, Robust Design

Asymmetric profile, 1.14 in x 2.12 in.

#### Superior Light Quality & Performance


Output up to 1376 lm/ft (HO), 121 lm/W (HO). 90 CRI static & tunable white 2200K - 5000K. Custom ranges available upon request.

#### High Performance Optics

Break through Batwing lens designed for excellent fixture to fixture spacing.

#### Better Optics & Beam Control Options

Asymmetric distribution. White or black Baffle, EdgeSoft™ lens, or diffuse lens and narrow optics available. Directional control with 360° rotation, angle gauge, and lock.

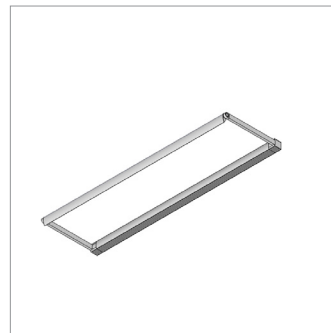

Integral Power



Double Rail with Tee, Small Square Canopy

Build Your Specification

107-WG						»
<b>System &amp; Rail Type</b>	<b>Single/Double Rail</b>	<b>System Length</b>	<b>Rail Length</b>	<b>Mounting</b>	<b>Arm Length</b>	
107-WG WingRail	<b>01</b> Single Rail <b>03</b> Double Rail with 3" (76mm) Tee <b>06</b> Double Rail with 6" (152mm) Tee <b>12</b> Double Rail with 12" (305mm) Tee <b>ZZ</b> Other (please specify)	Specify overall system length in ft/in or M/mm.  <i>Corner and Shapes Available</i> <a href="#">See Guide</a> for details.	<b>24</b> 24" (610mm) <b>36</b> 36" (914mm) <b>48</b> 48" (1219mm) <b>60</b> 60" (1524mm) <b>72</b> 72" (1829mm) <b>ZZ</b> Other rail length or layout (please specify)	<b>CA</b> Ceiling Arm <b>WA</b> Wall Arm	<b>1.25</b> 1.25" arm (32mm) <sup>1</sup> <b>3</b> 3" arm (76mm) <b>6</b> 6" arm (152mm) <b>12</b> 12" arm (305mm) <b>18</b> 18" arm (457mm) <sup>2</sup> <b>24</b> 24" arm (610mm) <sup>2</sup> <b>ZZ</b> Other (please specify) <sup>2</sup>	

See [Rail Length Chart](#) for more details.

**▲ Custom lengths may result in light gaps on the fixture. See [Rail Length Chart](#) for more details.**

»			»
<b>Power Location</b>	<b>Power Type</b>	<b>Voltage</b>	
<b>Integral Power</b>	<b>Flexible 1 to 1 Power</b>	<b>1</b> 120V	
IP Integral Power	<b>AE</b> 0-10V, 1.0% Dimming <b>AT</b> 0-10V, 0.1% Dimming <b>AD</b> DALI, 0.1% Dimming <b>AX</b> DMX, 100-0% Dimming <b>AH</b> Hi-lume 1% EcoSystem, Soft On / Fade to Black Technology, LDE <sup>1</sup> <b>AH2</b> ELV 1% 2-wire (Forward and Reverse Phase)	<b>2</b> 120V - 277V	
<b>Remote Power</b>		<b>X</b> Not Yet Specified	
Specify mounting and harness length code example: <b>2R25</b> , <b>4R25</b> ...etc.			
<b>Mounting Option</b>	<b>Wire Harness</b>		
<b>00</b> Zero Canopy <b>0B</b> Zero Block <b>2R</b> Small Round Canopy <b>2S</b> Small Square Canopy <b>4R</b> Large Round Canopy <b>4S</b> Large Square Canopy	<b>10</b> 10' (3.048m) Wire Harness <b>25</b> 25' (7.62m) Wire Harness <b>50</b> 50' (15.24m) Wire Harness <b>75</b> 75' (22.86m) Wire Harness <b>100</b> 100' (30.48m) Wire Harness		
		<b>Optimized Power</b> Add 'O' to power type example: AEO, ATO...etc. <sup>3</sup> <b>VodeNODE</b> Add 'N' to power type for Flexible 1 to 1 Power Add 'ON' to power type for Optimized Power example: AEN, ATN, AEON, ADON...etc. <sup>4</sup> <b>ZZ</b> Other (please specify)	
		See <a href="#">Power Guide</a> for driver features & limitations.	

»						»
<b>Emergency Power</b>	<b>LED Type</b>	<b>Lumen Output</b>	<b>Color Temperature</b>	<b>Optics</b>	<b>Sensors</b>	
<b>0</b> No Emergency Power <b>ZZ</b> Emergency Power (specify requirements)	<b>Z</b> Zipper Board <b>B</b> Button Board <sup>5</sup>	<b>LO</b> Low Output <b>SO</b> Standard Output <b>HO</b> High Output <b>ZZ</b> Other (please specify)  See <a href="#">IES Files</a> page for details. See <a href="#">Power Guide</a> for driver features & limitations.	<b>90+</b> CRI <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K  <b>ZZ</b> Tunable White Available See <a href="#">Guide</a> for details.	<b>Zipper Board (Z)</b> <b>WB</b> White Baffle with EdgeSoft™ <b>BB</b> Black Baffle with EdgeSoft <b>C1</b> Clear with EdgeSoft <b>D1</b> Diffuse  <b>Button Board (B)</b> <b>19</b> 19° x 48° Oval <b>36</b> 36° Medium	<b>0</b> None <b>ZZ</b> Sensor (specify requirements)	

»	
<b>Finish</b>	<b>Options</b>
<b>AL</b> Clear Anodized <b>WH</b> White Powder Coat <b>BL</b> Black Anodized <b>ZZ</b> Other (please specify)	<b>0</b> None <b>9</b> 9' 18/3 Cord and Plug <sup>6</sup> <b>CP</b> Chicago Plenum <sup>7</sup>

**NOTES & LIMITATIONS**

<sup>1</sup> 1.25" arm length is not available with Zero Block (0B).  
<sup>2</sup> For arms 18" and longer, wall-mounted systems include a cable tie-back.  
<sup>3</sup> Optimized Power is not available with Hi-lume 1% EcoSystem (AHO) Power Type.  
<sup>4</sup> VodeNODE enclosure is not available with ELV 1% 2-wire (AH2) Power Type.  
<sup>5</sup> Button Board (B) is not available with 90 CRI.  
<sup>6</sup> 9' 18/3 Cord and Plug only available with Remote Power (RP).  
<sup>7</sup> Chicago Plenum not applicable for wall arm mounting.


Standard 5 Year Limited Warranty. See details [here](#). Contact factory for options on Limited Warranties up to 20 years.

Listed to UL standards for damp location by a Nationally Recognized Testing Laboratory (NRTL) recognized by OSHA. Certain limitations exist for each Certification. Contact factory for verification.



# Applications

## Interior Corporate, Retail, and Display

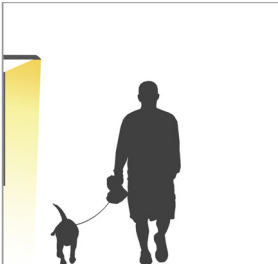

HBO Studio, Seattle, WA



University of Pennsylvania, Philadelphia, PA

## Declare Label

All Vode Lighting linear light fixtures proudly carry the Red List Approved designation.

See [International Living Future Institute](https://www.livingfuture.org) website for details.

# Declare.



## Vode Adaptive Architectural Lighting Systems Vode Lighting LLC

**Final Assembly:** Sonoma, California, US

**Life Expectancy:** 10+ Year(s)

**End of Life Options:** Recyclable (100%)

### Ingredients:

Anodized Aluminum (6063-T5 Alloy); Steel; Small Electrical Component (RoHS)<sup>1</sup>; Copper; **Fluorinated Ethylene Propylene (masterbatch)**<sup>2</sup>; Polymethyl methacrylate (PMMA); Stainless Steel; Polyoxymethylene Copolymer (POM); Styrene-butadiene polymer, hydrogenated; Poly(methyl methacrylate/butyl acrylate/styrene) (PMMA/BA/S); Styrene/butadiene copolymer; Distillates; Polypropylene; Calcium carbonate; Polycarbonate; EVA Copolymer; Methyl methacrylate (MMA); Polyphenylene Oxide; Brass; Tin, Organic

<sup>1</sup>LBC Temp Exception RL-002 - Small Electrical Components

<sup>2</sup>LBC Temp Exception RL-023 - Wire Sheathing Subject to NFPA 90A, NFPA 262, UL® 910

**Living Building Challenge Criteria:** Compliant

### I-13 Red List:

- LBC Red List Free      % Disclosed: 100% at 100ppm
- LBC Red List Approved      VOC Content: Not Applicable
- Declared

**I-10 Interior Performance:** Not Applicable

**I-14 Responsible Sourcing:** Not Applicable

VDE-0001

EXP. 01 JAN 2025

Original Issue Date: 2018

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](https://www.living-future.org/declare)


## Structure

Rail Lengths	24" (610mm) - 72" (1829mm). Modified lengths available. See <a href="#">Rail Length Chart</a> for more details.
Rail Dimensions	1.14" (29mm) x 2.12" (54mm) x length.
Construction	Extruded and machined 6063 aluminum.
Mounting	Ceiling or wall mount to jbox or driver housing.
Arm Length	1.25" (32mm) – 24" (610mm). Non-standard arm lengths available.
System Run Length	24" (610mm). Unlimited maximum.
Operating Temperature	32°F to 104°F (0°C to 40°C).
Humidity	0-85%, non-condensing.
System Weight	1.04 lbs per ft (0.47kg per 305mm) Power supply and housing not included.


## Materials

LED Board Construction	Aluminum core PCB, black LCP connectors, RoHS compliant.
Lens	High-impact extruded acrylic glass (PMMA).
Baffle	6063 Aluminum, RoHS compliant painted finish.
Button Optics	High-impact cast acrylic glass (PMMA), polycarbonate (PC) holder.
Power Cable	Ø4mm, 18/2 AWG, Plenum (CMP) rated semi-rigid PVC or FEP, flame tested UL-910 (PVC free in 2020).
Cable Connectors	Unfilled black nylon, rated UL 94 V-0, halogen free, PVC or FEP overmold, RoHS compliant (PVC free in 2020).
Remote Linear Power Housing (RLP)	20.7" x 2.375" x 2.53", 0.054" formed Galvanized Steel.
Remote Brick Power Housing (RBP)	4.32" x 3.37" x .078" Galvanized Steel mounting plate.


## Dimensions

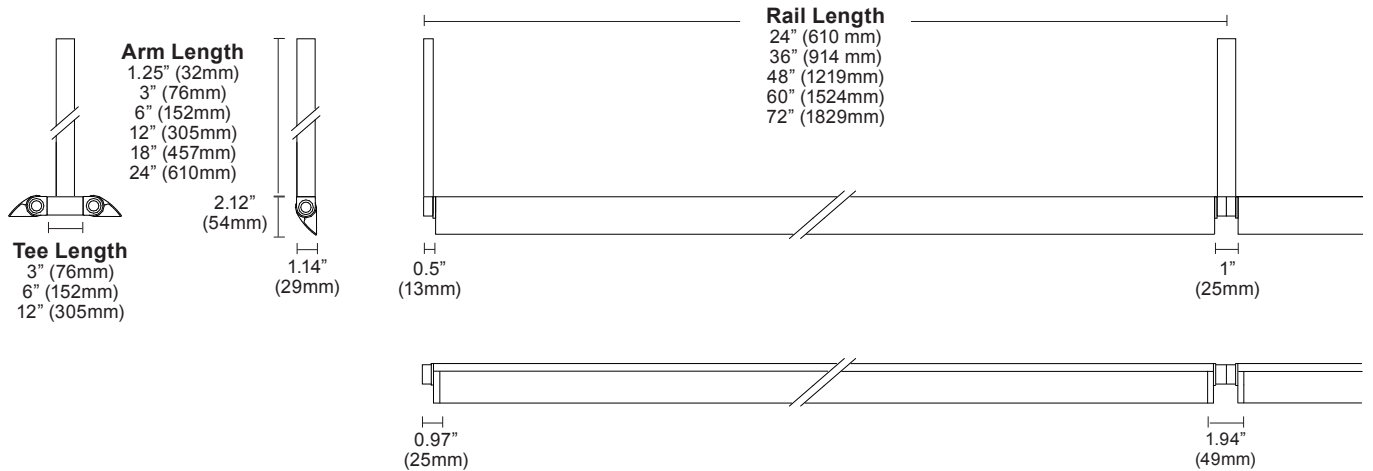

## Mounting Options

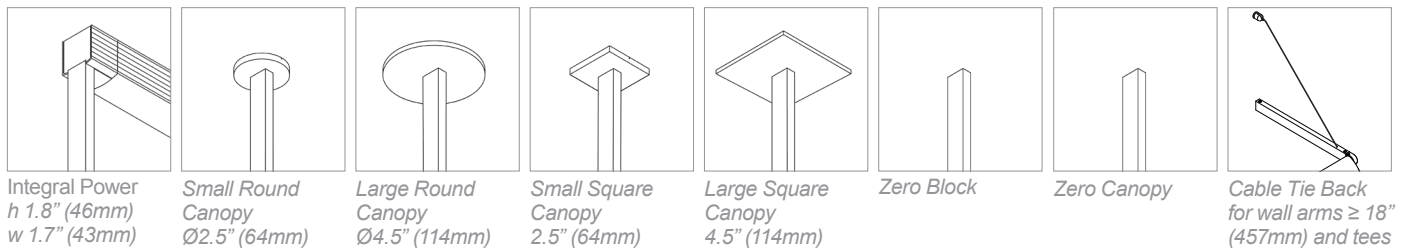

## Layout

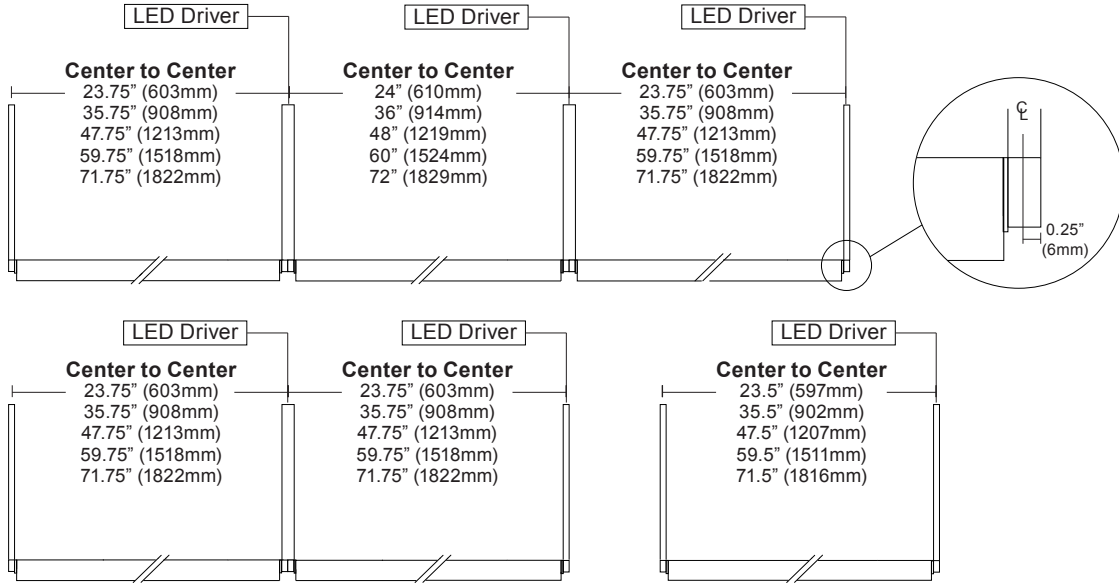


Corner and Shapes Available (Square, Rectangle, L-Shape, U-Shape, ZigZag) [See Guide](#) for details.

## Power and Controls

Power Type	Class 2 (<60V output) constant current driver.
Dimming Controls	Dimming (0.1%, 1%), 0-10V, DALI, DMX, Hi-lume 1% are available. <a href="#">See Power Guide</a> for details.
Input Voltage	120V - 277V, 50/60hz.
Power Location	Integral or remote power. Maximum remote distance up to 100' (30.5m) depending on driver selection. <a href="#">See Power Guide</a> for details.


Vode power locations fall into two categories: integral and remote. Remote power is locating the power supply away from the fixture. Remote power comes in two housing styles: brick style and linear style. Consult [Power Guide](#) to determine which type you will receive. Integral power is locating the power supply into the lighting fixture or mounting.

### Remote Brick Power Housing

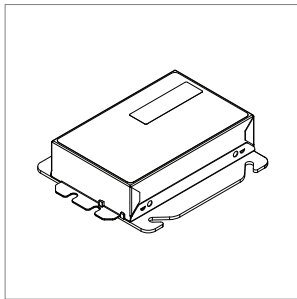


Supplied for some remote power applications. One remote power supply housing is supplied for each rail. Provided driver mounting plate fits standard 4" metal, square J-Boxes with a minimum volume of 21 in<sup>3</sup> (J-Box not provided). See [Tech Sheet](#) for details.

### Remote Linear Power Housing

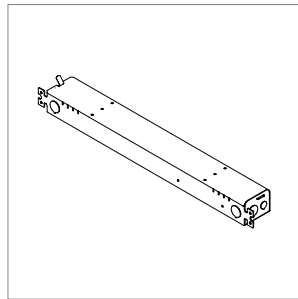


One remote power supply housing is supplied with each power supply. All Vode linear remote drivers come in a 0.054" (0.8mm) formed galvanized steel power supply housing with five (5) knockouts: (4) 1-1/8", (1) 7/8" and (1) 9/16". Accommodates standard linear power supplies. See [Tech Sheet](#) for details.

### Integral Power

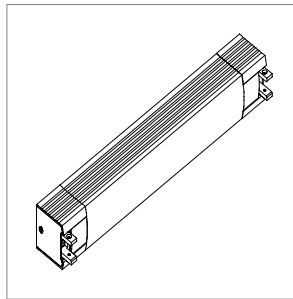

Houses integral power supply. Direct conduit feed recommended. Housing mounts to standard North America 4" j-box. Mounts to most surfaces. Blocking recommended at all arm junctions. See [Tech Sheet](#) for details.

### Wire Harness

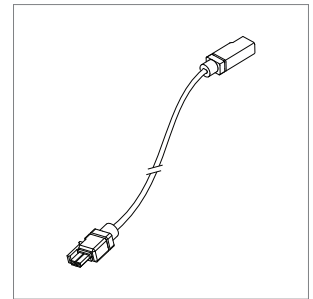


Wire harness connects driver to rail section. Lengths of 10' (3.0m) & 25' (7.6m) with snap-lock connectors for quick and easy installation. Multiple harnesses may be combined for lengths up to 100' (30.5m). See [Tech Sheet](#) for details.

## Power and Controls

### Flexible 1 to 1 power


For Flexible 1 to 1 Power, Vode supplies one single output driver per fixture, allowing each fixture to be controlled independently. Direct/Indirect fixtures are supplied with two single output drivers, allowing the direct and indirect lighting to be controlled independently. Consult [Power Guide](#) to determine which type you will receive.

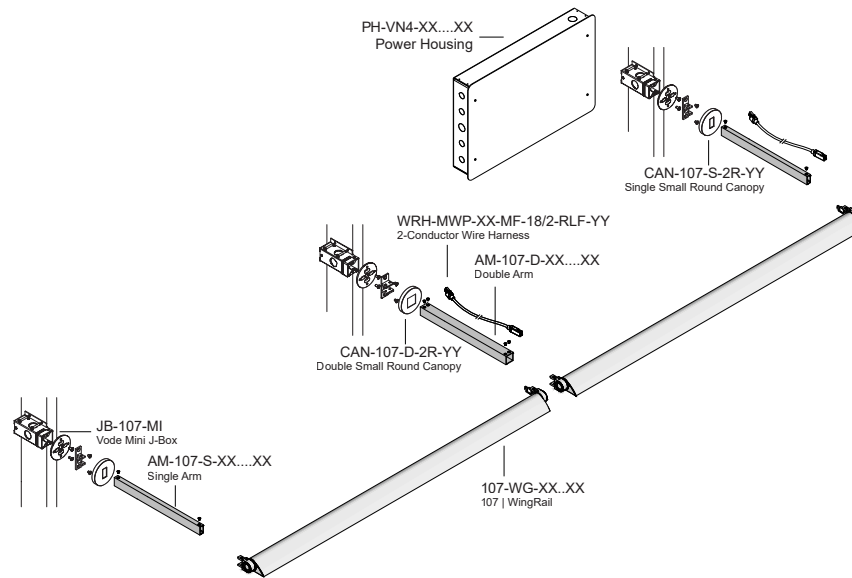

### Optimized Power

To optimize power, Vode configures specifications with drivers that have 2 or 4 outputs. Depending on system configurations and power requirements, up to 4 fixtures can be powered from a 4-output driver. Consult [Power Guide](#) to determine which type you will receive.

IMPORTANT: Each fixture will still require individual wire harnesses, as shown below.

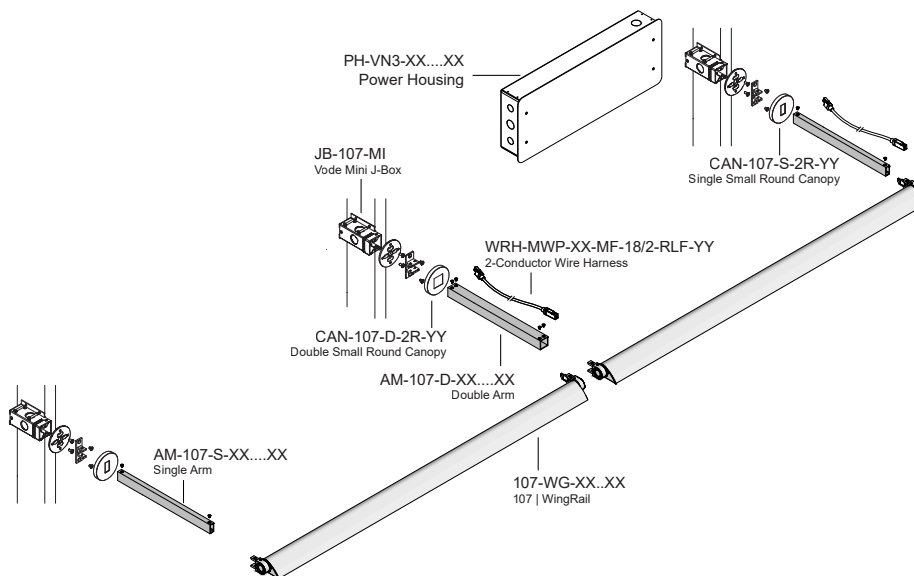


Note: Drawings not to scale, for reference only.

## Performance | Zipper Board Optics

Button Board Optics design has 72 diodes per foot (305mm).

### White Baffle with EdgeSoft (WB)

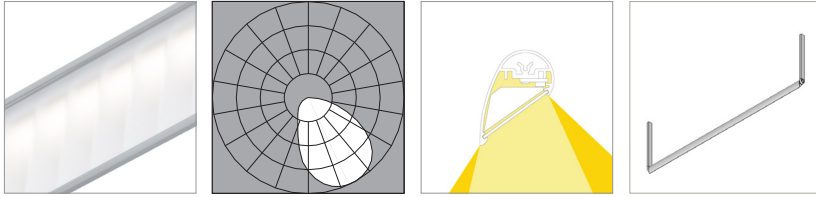

L80 >60,000 hours


**90 CRI (90min., 96 avg.)**

<b>Low Output (LO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	27	28	29	29
Lumens per foot (305mm)	226	233	238	241
Watts per foot (305mm)	8.5	8.5	8.5	8.5

<b>Standard Output (SO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	26	27	27	28
Lumens per foot (305mm)	339	350	357	361
Watts per foot (305mm)	13.3	13.3	13.3	13.3

<b>High Output (HO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	26	27	27	28
Lumens per foot (305mm)	339	350	357	361
Watts per foot (305mm)	13.3	13.3	13.3	13.3

### Black Baffle with EdgeSoft (BB)

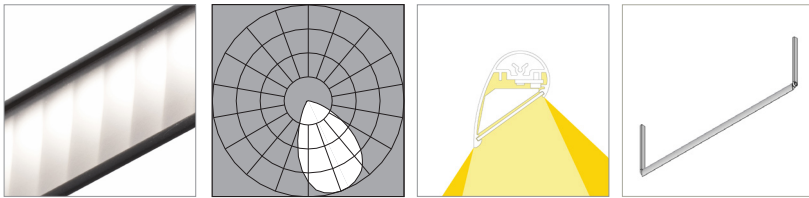

L80 >60,000 hours

**90 CRI (90min., 96 avg.)**

<b>Low Output (LO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	27	28	29	29
Lumens per foot (305mm)	226	233	238	241
Watts per foot (305mm)	8.5	8.5	8.5	8.5

<b>Standard Output (SO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	26	27	27	28
Lumens per foot (305mm)	339	350	357	361
Watts per foot (305mm)	13.3	13.3	13.3	13.3


<b>High Output (HO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	26	27	27	28
Lumens per foot (305mm)	339	350	357	361
Watts per foot (305mm)	13.3	13.3	13.3	13.3



## Performance | Zipper Board Optics

Button Board Optics design has 72 diodes per foot (305mm).

### Clear with EdgeSoft (C1)

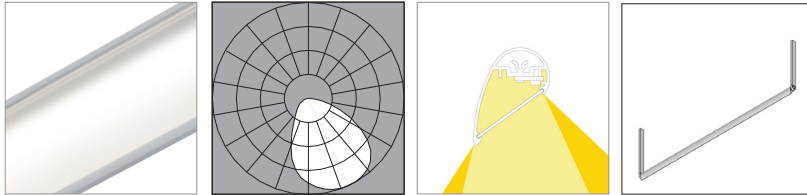

L80 >60,000 hours

#### 90 CRI (90min., 96 avg.)

<b>Low Output (LO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	78	81	82	84
Lumens per foot (305mm)	291	300	306	312
Watts per foot (305mm)	3.8	3.8	3.8	3.8


### Standard Output (SO)

Efficacy - Lumens per Watt	97	100	102	104
Lumens per foot (305mm)	582	600	612	624
Watts per foot (305mm)	6.1	6.1	6.1	6.1

### High Output (HO)

Efficacy - Lumens per Watt	90	93	95	97
Lumens per foot (305mm)	1105	1140	1163	1187
Watts per foot (305mm)	12.4	12.4	12.4	12.4

### Diffuse (D1)

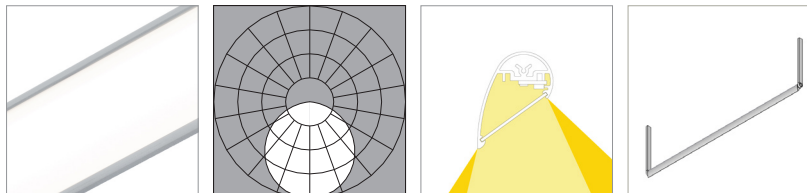

L80 is >60,000 hours

#### 90 CRI (90min., 96 avg.)

<b>Low Output (LO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	56	58	59	61
Lumens per foot (305mm)	209	216	220	225
Watts per foot (305mm)	3.8	3.8	3.8	3.8

### Standard Output (SO)

Efficacy - Lumens per Watt	71	73	74	76
Lumens per foot (305mm)	442	435	444	453
Watts per foot (305mm)	6.1	6.1	6.1	6.1


### High Output (HO)

Efficacy - Lumens per Watt	66	68	69	71
Lumens per foot (305mm)	806	831	848	865
Watts per foot (305mm)	12.4	12.4	12.4	12.4

## Performance | Button Board Optics

Button Board Optics design has 72 diodes per foot (305mm).

### 19° x 48° Oval (19)

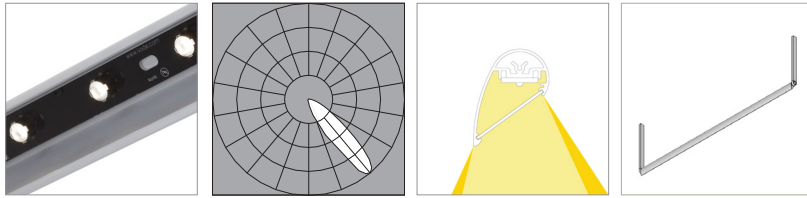


L80 >70,000 hours

Standard Output (SO)	80 CRI (80min., 84 avg.)			
	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	57	59	62	64
Lumens per foot (305mm)	420	438	456	474
Watts per foot (305mm)	7.3	7.3	7.3	7.3

### High Output (HO)

Efficacy - Lumens per Watt	50	52	55	57
Lumens per foot (305mm)	636	662	690	717
Watts per foot (305mm)	12.6	12.6	12.6	12.6

### 36° Medium (36)

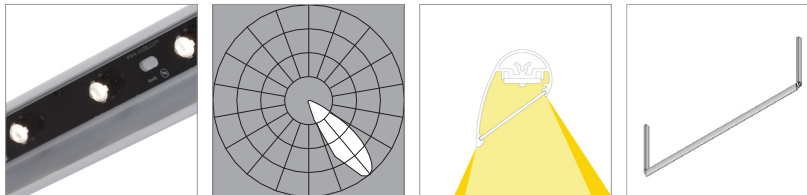

L80 >70,000 hours

Standard Output (SO)	80 CRI (80min., 84 avg.)			
	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	64	67	70	73
Lumens per foot (305mm)	476	496	516	537
Watts per foot (305mm)	7.3	7.3	7.3	7.3

### High Output (HO)

Efficacy - Lumens per Watt	57	60	63	65
Lumens per foot (305mm)	724	754	786	817
Watts per foot (305mm)	12.6	12.6	12.6	12.6

Copyright © 2025 Vode Lighting LLC. All rights reserved. Vode, the Vode logo, BoxRail, FlyWing, MicroBaffle, Button Board, Zipper Board, Zero Canopy, Zero Block, VodeNODE and other names are either registered trademarks or trademarks of Vode Lighting LLC in the United States and may be registered in other countries. All other trademarks listed herein belong to their respective owners. Due to ongoing innovation, specification details may change without notice.