



Spec Guide

ZipTwo | Square 3520 | 707



Direct lighting for open office and ambient applications.



Square 3520, Critical Edge, white

Benefits & Features

Minimal Profile, Robust Design

Square profile. 1.38" (35mm) x 0.75" (19mm).

Superior Light Quality & Performance

Output up to 1404 lm/ft (4,605 lm/m) (HO), 144 lm/W (SO). 80 or 90 CRI & tunable white (2200K-5000K) available.

Versatile Mounting, Easy Installation

Magnet with tape-on metal strip or low profile clip allow for mounting to almost any surface or T-Bar ceiling.

Extensive Optics

Options of Diffuse, Critical Edge, and Side Diffuse give designers the power to create and design their space using one product.



Square 3520, Diffuse, white



Square 3520, Side Diffuse, Black

Build Your Specification

707-Z2	SL				»»
--------	----	--	--	--	----

System & Rail Type	System Type	System Length	Rail Length	Mounting	Arm/Cord Length
707-Z2 ZipTwo	SL Standard Linear	Specify overall system length in ft/in or M/mm. <i>Corner and Shapes A available See Guide for details.</i>	24 24" (610mm) 36 36" (914mm) 48 48" (1219mm) 60 60" (1524mm) 72 72" (1829mm) 96 96" (2438mm) 108 108" (2743mm) 120 120" (3048mm) 132 132" (3352mm) 144 144" (3658mm) ZZ Other rail length or layout (please specify) <i>See Rail Length Chart for more details.</i>	C Clip CM Clip with Micro J-Box T Magnet with Tape-On Metal Strip T1 9/16" T-Bar Clip, low profile T2 15/16" T-Bar Clip, low profile T3 15/16" T-Bar Clip, medium profile T4 15/16" T-Bar Clip, concealed T5 9/16" T-Bar Clip, medium profile T6 Slotted T-Bar Clip T7 Dimensional T-Bar Clip SC Strut Channel Clip DM Armstrong DynaMax ZZ Other (please specify)	0 None
<p>▲ Custom lengths may result in light gaps on the fixture. See Rail Length Chart for more details.</p>					

»»					Z
----	--	--	--	--	---

Power Location	Power Type	Voltage	Emergency Power	LED Type
Remote Power	Flexible 1 to 1 Power	1 120V 2 120V - 277V X Not Yet Specified	0 No Emergency Power ZZ Emergency Power (specify requirements)	Z Zipper Board
RP10 10' (3.048m) Wire Harness RP25 25' (7.62m) Wire Harness RP50 50' (15.24m) Wire Harness RP75 75' (22.86m) Wire Harness RP100 100' (30.48m) Wire Harness	AE 0-10v, 1.0% Dimming AT 0-10v, 0.1% Dimming AD DALI, 0.1% Dimming AX DMX, 100-0% Dimming AH Hi-lume 1% EcoSystem, Soft On / Fade to Black Technology, LDE ¹ AH2 ELV 1% 2-wire (Forward and Reverse Phase) Optimized Power Add 'O' to power type example: AEO, ATO...etc. ¹ VodeNODE Add 'N' to power type for Flexible 1 to 1 Power Add 'ON' to power type for Optimized Power example: AEN, ATN, AEON, ADON...etc. ² ZZ Other (please specify) <i>See Power Guide for driver features & limitations.</i>			

»»				
----	--	--	--	--

Lumen Output	Color Temperature	Optics	Sensors	Finish
LO Low Output SO Standard Output HO High Output ZZ Other (please specify) <i>See IES Files page for details. See Power Guide for driver features & limitations.</i>	90+ CRI 279 2700K 309 3000K 359 3500K 409 4000K RGBW 90+ CRI C279 RGB Color, 2700K C309 RGB Color, 3000K C359 RGB Color, 3500K C409 RGB Color, 4000K ZZ Tunable White Available <i>See Guide for details.</i>	F5 Square 3520, Critical Edge F6 Square 3520, Diffuse ³ F9 Square 3520, Side Diffuse FA Square 3520, Single Side Diffuse	0 None ZZ Other (please specify) ⁴	WH White BL Black

»»

Options

0 None
9 9' 18/3 Cord and Plug

NOTES & LIMITATIONS

- ¹ Optimized Power is not available with Hi-lume 1% EcoSystem (AHO) Power Type.
 - ² VodeNODE enclosure is not available with ELV 1% 2-wire (AH2) Power Type.
 - ³ Square 3520, Diffuse is only available in White Finish (WH).
 - ⁴ Sensors available. Contact Vode for more information.
- Mounting type available with Chicago Plenum.
 Contact factory for Chicago Plenum.

Standard 5 Year Limited Warranty. See details [here](#). Contact factory for options on Limited Warranties up to 20 years.

Listed to UL standards for damp location by a Nationally Recognized Testing Laboratory (NRTL) recognized by OSHA. Certain limitations exist for each Certification. Contact factory for verification.



Applications

General Interior and Open Office



Square 3520, Diffuse




Square 3520, Critical Edge

Declare Label

All Vode Lighting linear light fixtures proudly carry the Red List Approved designation.

See [International Living Future Institute](https://www.living-future.org/declare) website for details.



Declare.

Vode Adaptive Architectural Lighting Systems

Vode Lighting LLC

Final Assembly: Sonoma, California, US
Life Expectancy: 10+ Year(s)
End of Life Options: Recyclable (100%)

Ingredients:

Anodized Aluminum (6063-T5 Alloy); Steel; Small Electrical Component (RoHS)¹; Copper; **Fluorinated Ethylene Propylene (masterbatch)**²; Polymethyl methacrylate (PMMA); Stainless Steel; Polyoxymethylene Copolymer (POM); Styrene-butadiene polymer, hydrogenated; Poly(methyl methacrylate/butyl acrylate/styrene) (PMMA/BA/S); Styrene/butadiene copolymer; Distillates; Polypropylene; Calcium carbonate; Polycarbonate; EVA Copolymer; Methyl methacrylate (MMA); Polyphenylene Oxide; Brass; Tin, Organic

¹LBC Temp Exception RL-002 - Small Electrical Components
²LBC Temp Exception RL-023 - Wire Sheathing Subject to NFPA 90A, NFPA 262, UL® 910

Living Building Challenge Criteria: Compliant

I-13 Red List:

<input type="checkbox"/> LBC Red List Free	% Disclosed: 100% at 100ppm
<input checked="" type="checkbox"/> LBC Red List Approved	VOC Content: Not Applicable
<input type="checkbox"/> Declared	

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

VDE-0001
 EXP. 01 JAN 2025
 Original Issue Date: 2018

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
 INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](https://www.living-future.org/declare)



Structure

Rail Lengths	24" (610mm) - 144" (3658mm). Modified lengths available. See Rail Length Chart for more details.
Rail Dimensions	1.38" (35mm) x 0.75" (19mm) x length.
Construction	Extruded and machined 6063 aluminum.
Mounting	Clip, Clip with Micro J-Box, Magnet with Tape-On Metal Strip, T-Bar Clips for most grid/panel construction, Strut Channel Clip.
System Run Length	24" (610mm) minimum. Unlimited maximum.
Operating Temperature	32°F to 104°F (0°C to 40°C).
Humidity	0-95%, non-condensing. Suitable for damp locations.
System Weight	Diffuse, Side Diffuse, Single Side Diffuse: 0.27lbs per ft (0.12kg per 305mm). Power supply and housing not included. Critical Edge: 0.32lbs per ft (0.15kg per 305mm). Power supply and housing not included.

Materials


LED Board Construction	Aluminum core PCB, black LCP connectors, RoHS compliant.
Lens	High-impact extruded acrylic glass (PMMA).
Power Cable	Ø3mm, 33/2 AWG, Plenum (CMP) rated semi-rigid PVC or FEP, flame tested UL-910, red list free.
Cable Connectors	Unfilled black nylon, rated UL 94 V-0, halogen free, PVC or FEP overmold, RoHS compliant, red list free.
Remote Linear Power Housing (RLP)	20.7" x 2.375" x 2.53", 0.054" formed Galvanized Steel.
Remote Brick Power Housing (RBP)	4.32" x 3.37" x .078" Galvanized Steel mounting plate.

Power and Controls

Power Type	Class 2 (<60V output) constant current driver.
Dimming Controls	Dimming (0.1%, 1%), 0-10V, DALI, DMX, Hi-lume 1% are available. See Power Guide for details.
Input Voltage	120V - 277V, 50/60hz.
Power Location	Remote power. Maximum remote distance up to 100' (30.5m) <i>depending</i> on driver selection. See Power Guide for details.


Remote power is locating the power supply away from the fixture. Remote power comes in two housing styles: brick style and linear style. Consult [Power Guide](#) to determine which type you will receive.

Remote Brick Power Housing




Supplied for some remote power applications. One remote power supply housing is supplied for each rail. Provided driver mounting plate fits standard 4" metal, square J-Boxes with a minimum volume of 21 in³ (J-Box not provided). See [Tech Sheet](#) for details.

Remote Linear Power Housing

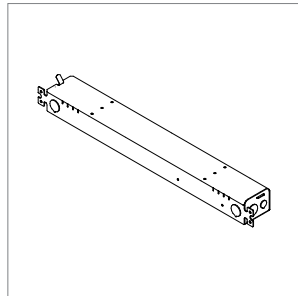

One remote power supply housing is supplied with each power supply. All Vode linear remote drivers come in a 0.054" (0.8mm) formed galvanized steel power supply housing with five (5) knockouts: (4) 1-1/8", (1) 7/8" and (1) 9/16". Accommodates standard linear power supplies. See [Tech Sheet](#) for details.

Wire Harness



Wire harness connects driver to rail section. Lengths of 10' (3.0m) & 25' (7.6m) with snap-lock connectors for quick and easy installation. Multiple harnesses may be combined for lengths up to 100' (30.5m). See [Tech Sheet](#) for details.

Power and Controls


Flexible 1 to 1 power

For Flexible 1 to 1 Power, Vode supplies one single output driver per fixture, allowing each fixture to be controlled independently. Direct/Indirect fixtures are supplied with two single output drivers, allowing the direct and indirect lighting to be controlled independently. Consult [Power Guide](#) to determine which type you will receive.

Optimized Power


To optimize power, Vode configures specifications with drivers that have 2 or 4 outputs. Depending on system configurations and power requirements, up to 4 fixtures can be powered from a 4-output driver. Consult [Power Guide](#) to determine which type you will receive.

IMPORTANT: Each fixture will still require individual wire harnesses, as shown below.

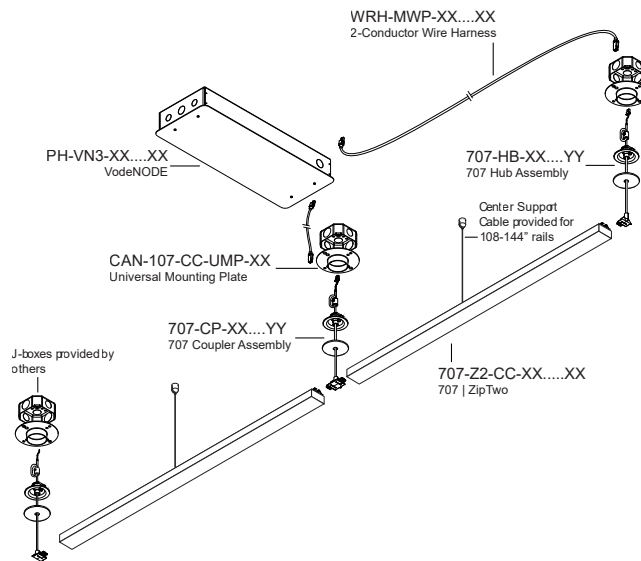


Note: Drawings not to scale, for reference only.

Dimensions

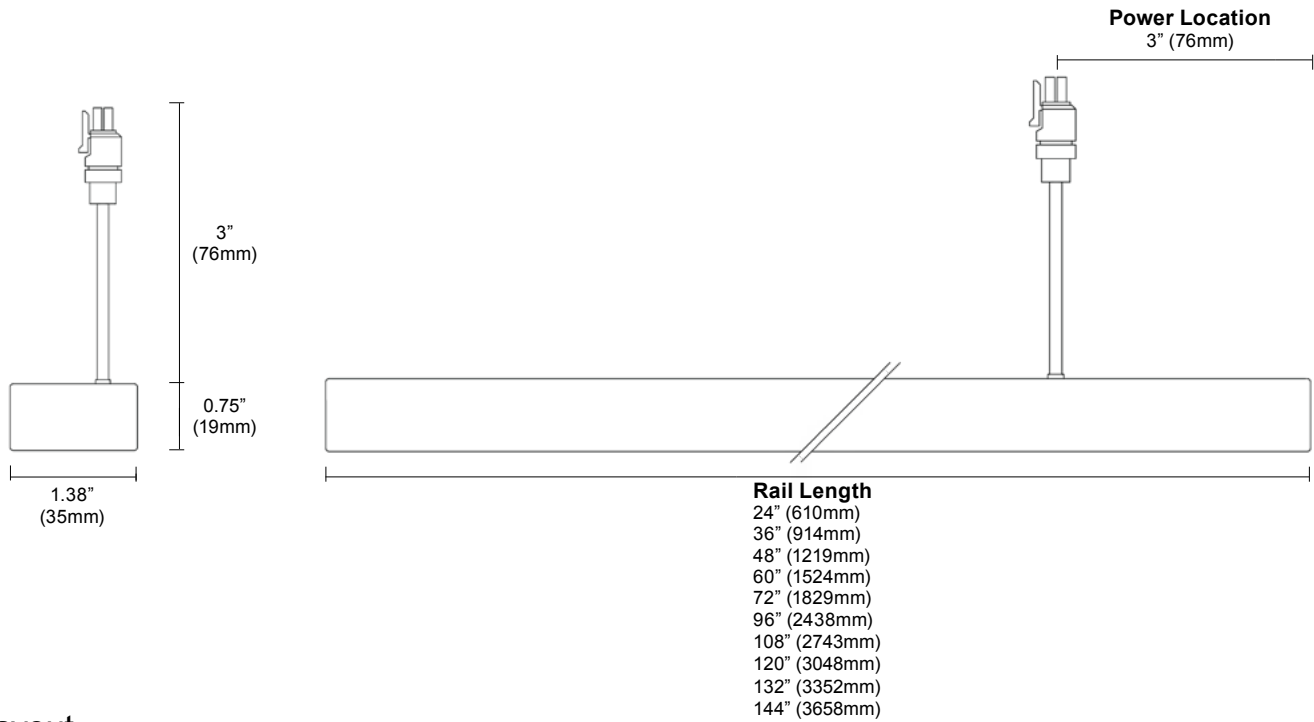


Layout

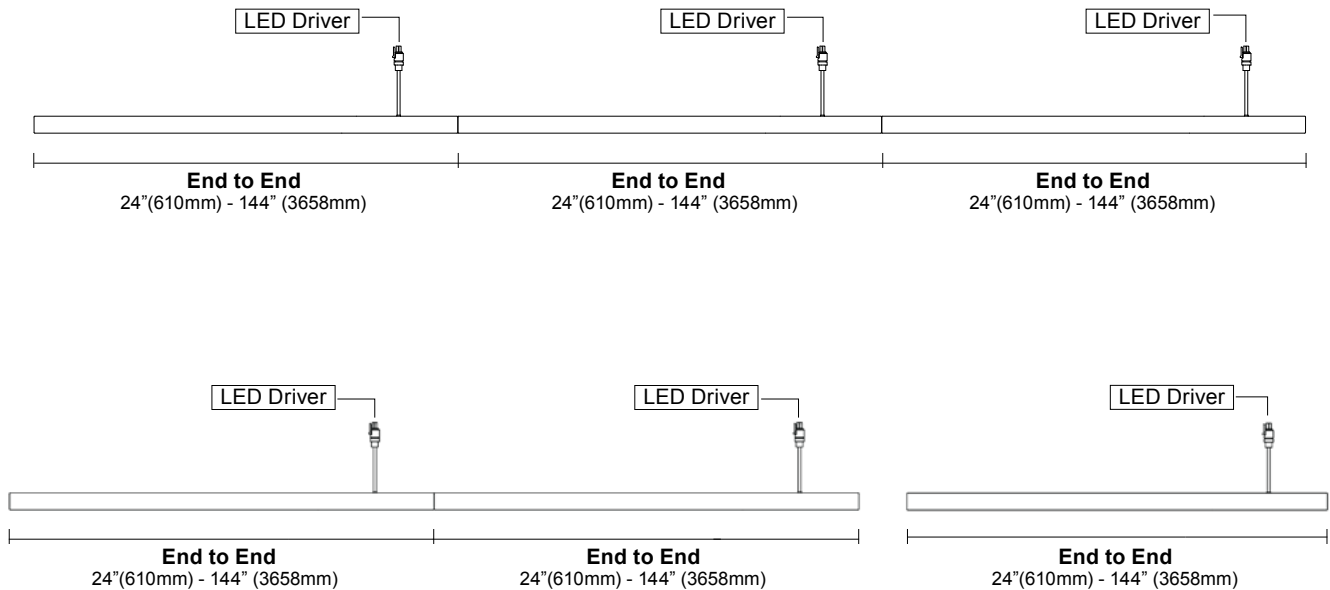


Corner and Shapes Available (Square, Rectangle, L-Shape, U-Shape, ZigZag) [See Guide](#) for details.


Mounting Options

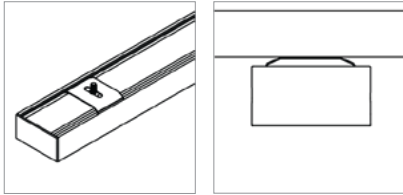


Clip (C)

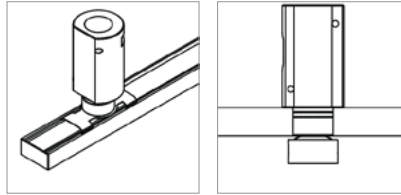


Clip with Micro J-Box (CM)

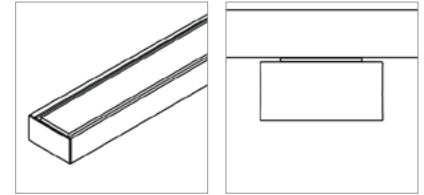


Magnet with Tape-On Metal Strip (T)

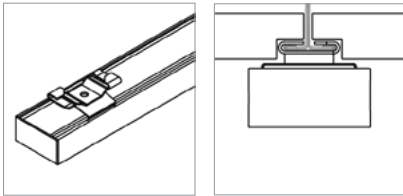


9/16" T-Bar Clip, low profile (T1)

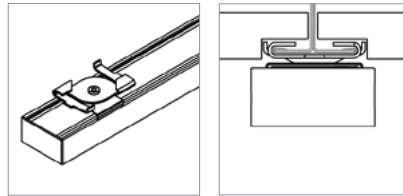


15/16" T-Bar Clip, low profile (T2)

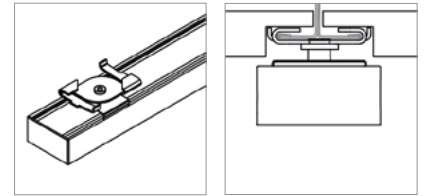


15/16" T-Bar Clip, medium profile (T3)

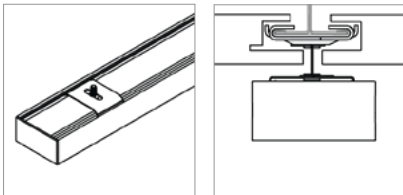


15/16" T-Bar Clip, concealed (T4)

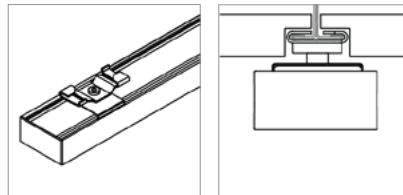


9/16" T-Bar Clip, medium profile (T5)

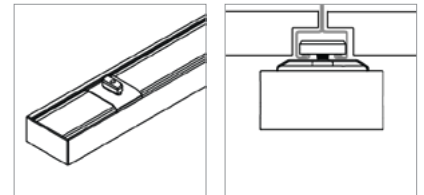


Slotted T-Bar Clip (T6)

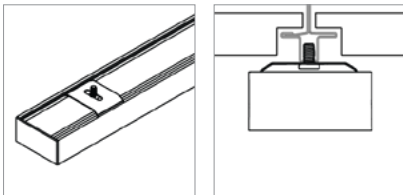

Dimensional T-Bar Clip (T7)

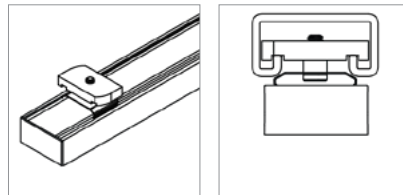

Strut Channel Clip (SC)

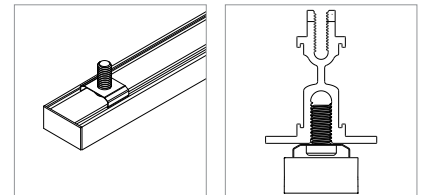


Armstrong DynaMax (DM)

See [ZipTwo Clip Guide](#) to check compatibility.

Performance | Zipper Board Optics

Zipper Board Optics design has 72 diodes per foot (305mm).

Square 3520, Critical Edge, white finish (F5-WH)

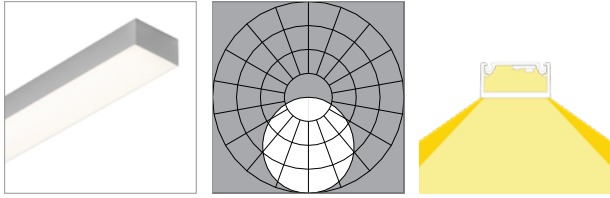

L80 >60,000 hours

90 CRI (90min., 96 avg.)

Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	65	67	69	69
Lumens per foot (305mm)	242	249	254	257
Watts per foot (305mm)	3.8	3.8	3.8	3.8


Standard Output (SO)

Efficacy - Lumens per Watt	74	77	78	79
Lumens per foot (305mm)	483	498	508	514
Watts per foot (305mm)	6.6	6.6	6.6	6.6

High Output (HO)

Efficacy - Lumens per Watt	74	76	78	78
Lumens per foot (305mm)	725	747	763	770
Watts per foot (305mm)	9.9	9.9	9.9	9.9

Square 3520, Diffuse, white finish (F6-WH)

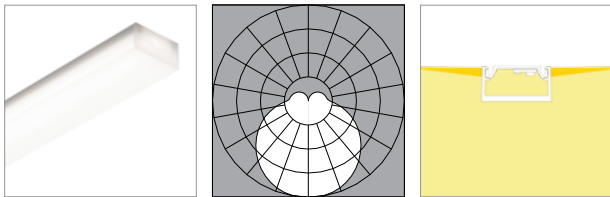

L80 >60,000 hours

90 CRI (90min., 96 avg.)

Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	103	107	109	110
Lumens per foot (305mm)	383	395	404	408
Watts per foot (305mm)	3.8	3.8	3.8	3.8

Standard Output (SO)

Efficacy - Lumens per Watt	118	121	124	125
Lumens per foot (305mm)	767	791	807	815
Watts per foot (305mm)	6.6	6.6	6.6	6.6


High Output (HO)

Efficacy - Lumens per Watt	117	120	123	124
Lumens per foot (305mm)	1150	1186	1211	1223
Watts per foot (305mm)	9.9	9.9	9.9	9.9

Performance | Zipper Board Optics | RGBW

Zipper Board Optics design has 72 diodes per foot (305mm).
 RGBW (red, green, blue, and white) tested with **all channels on**.

Square 3520, Critical Edge, white finish (F5-WH)

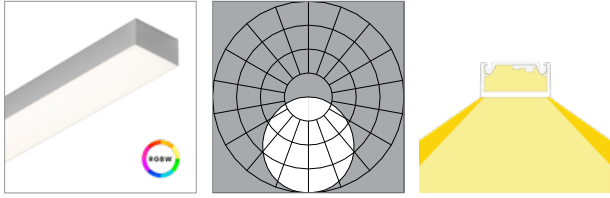


L80 >60,000 hours

RGBW Color, 90 CRI (90min., 96 avg.)

Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	55	57	58	58
Lumens per foot (305mm)	458	472	482	487
Watts per foot (305mm)	8.5	8.5	8.5	8.5

Standard Output (SO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	52	54	55	55
Lumens per foot (305mm)	687	708	723	730
Watts per foot (305mm)	13.3	13.3	13.3	13.3

Square 3520, Diffuse, white finish (F6-WH)

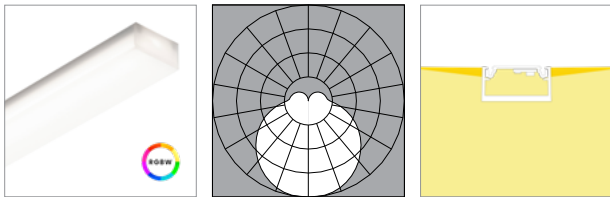

L80 >60,000 hours

RGBW Color, 90 CRI (90min., 96 avg.)


Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	87	89	91	92
Lumens per foot (305mm)	726	749	765	772
Watts per foot (305mm)	8.5	8.5	8.5	8.5

Standard Output (SO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	83	85	87	88
Lumens per foot (305mm)	1090	1124	1147	1159
Watts per foot (305mm)	13.3	13.3	13.3	13.3

Performance | Zipper Board Optics

Zipper Board Optics design has 72 diodes per foot (305mm).

Square 3520, Side Diffuse, white finish (F9-WH)

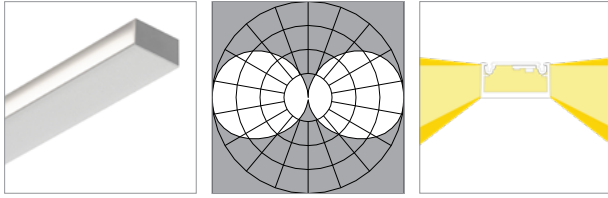

L80 >60,000 hours

90 CRI (90min., 96 avg.)

Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	52	54	55	56
Lumens per foot (305mm)	193	199	203	205
Watts per foot (305mm)	3.8	3.8	3.8	3.8


Standard Output (SO)

Efficacy - Lumens per Watt	60	62	63	63
Lumens per foot (305mm)	386	398	406	410
Watts per foot (305mm)	6.6	6.6	6.6	6.6

High Output (HO)

Efficacy - Lumens per Watt	59	61	62	63
Lumens per foot (305mm)	578	597	609	615
Watts per foot (305mm)	9.9	9.9	9.9	9.9

Square 3520, Single Side Diffuse, white finish (FA-WH)

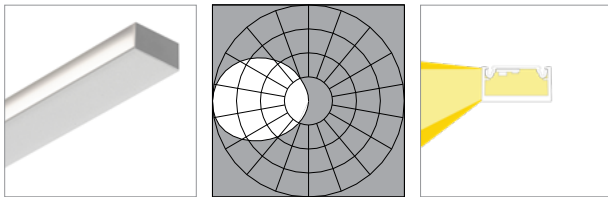

L80 >60,000 hours

90 CRI (90min., 96 avg.)

Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	33	34	35	35
Lumens per foot (305mm)	122	126	128	130
Watts per foot (305mm)	3.8	3.8	3.8	3.8

Standard Output (SO)

Efficacy - Lumens per Watt	38	39	40	40
Lumens per foot (305mm)	244	251	256	259
Watts per foot (305mm)	6.6	6.6	6.6	6.6


High Output (HO)

Efficacy - Lumens per Watt	37	39	39	40
Lumens per foot (305mm)	365	377	385	389
Watts per foot (305mm)	9.9	9.9	9.9	9.9

Performance | Zipper Board Optics | RGBW

Zipper Board Optics design has 72 diodes per foot (305mm).
 RGBW (red, green, blue, and white) tested with **all channels on**.

Square 3520, Side Diffuse, white finish (F9-WH)

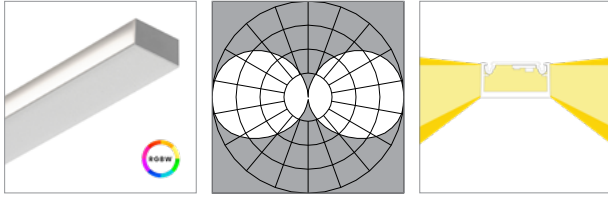


L80 >60,000 hours

RGBW Color, 90 CRI (90min., 96 avg.)

Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	44	45	46	47
Lumens per foot (305mm)	365	377	385	388
Watts per foot (305mm)	8.5	8.5	8.5	8.5

Standard Output (SO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	42	43	44	44
Lumens per foot (305mm)	548	565	577	583
Watts per foot (305mm)	13.3	13.3	13.3	13.3

Square 3520, Single Side Diffuse, white finish (FA-WH)

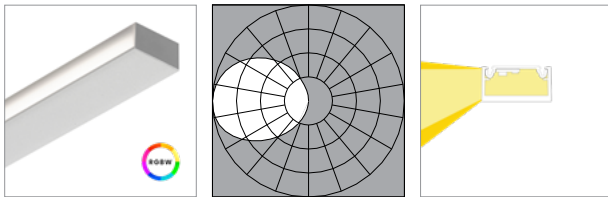

L80 >60,000 hours

RGBW Color, 90 CRI (90min., 96 avg.)


Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	28	29	29	30
Lumens per foot (305mm)	231	238	243	245
Watts per foot (305mm)	8.5	8.5	8.5	8.5

Standard Output (SO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	27	27	28	28
Lumens per foot (305mm)	346	357	365	368
Watts per foot (305mm)	13.3	13.3	13.3	13.3

Performance | Zipper Board Optics

Zipper Board Optics design has 72 diodes per foot (305mm).

Square 3520, Critical Edge, black finish (F5-BL)

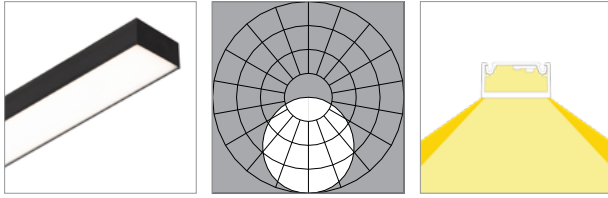

L80 >60,000 hours

90 CRI (90min., 96 avg.)

Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	43	44	45	45
Lumens per foot (305mm)	157	162	165	167
Watts per foot (305mm)	3.8	3.8	3.8	3.8


Standard Output (SO)

Efficacy - Lumens per Watt	48	50	51	51
Lumens per foot (305mm)	314	324	330	334
Watts per foot (305mm)	6.6	6.6	6.6	6.6

High Output (HO)

Efficacy - Lumens per Watt	48	50	51	51
Lumens per foot (305mm)	471	486	496	501
Watts per foot (305mm)	9.9	9.9	9.9	9.9

Square 3520, Side Diffuse, black finish (F9-BL)

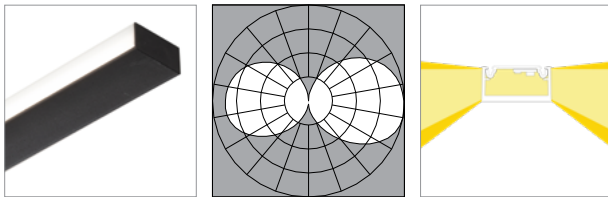

L80 >60,000 hours

90 CRI (90min., 96 avg.)

Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	44	45	46	47
Lumens per foot (305mm)	162	167	170	172
Watts per foot (305mm)	3.8	3.8	3.8	3.8

Standard Output (SO)

Efficacy - Lumens per Watt	50	52	53	53
Lumens per foot (305mm)	324	334	341	344
Watts per foot (305mm)	6.6	6.6	6.6	6.6


High Output (HO)

Efficacy - Lumens per Watt	50	51	52	53
Lumens per foot (305mm)	486	501	511	517
Watts per foot (305mm)	9.9	9.9	9.9	9.9

Performance | Zipper Board Optics | RGBW

Zipper Board Optics design has 72 diodes per foot (305mm).
 RGBW (red, green, blue, and white) tested with **all channels on**.

Square 3520, Critical Edge, black finish (F5-BL)

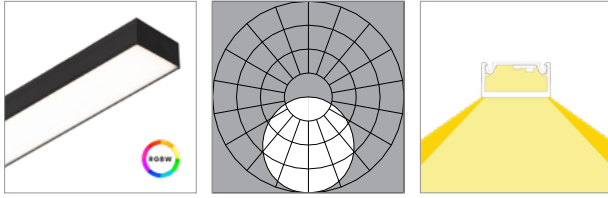


L80 >60,000 hours

RGBW Color, 90 CRI (90min., 96 avg.)

Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	109	112	115	116
Lumens per foot (305mm)	913	942	961	971
Watts per foot (305mm)	8.5	8.5	8.5	8.5

Standard Output (SO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	104	107	109	110
Lumens per foot (305mm)	1370	1413	1442	1456
Watts per foot (305mm)	13.3	13.3	13.3	13.3

Square 3520, Side Diffuse, black finish (F9-BL)

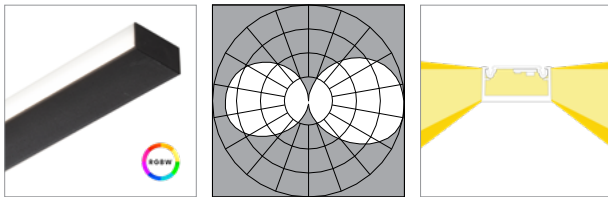

L80 >60,000 hours

RGBW Color, 90 CRI (90min., 96 avg.)


Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	37	38	39	39
Lumens per foot (305mm)	307	317	323	326
Watts per foot (305mm)	8.5	8.5	8.5	8.5

Standard Output (SO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	35	36	37	37
Lumens per foot (305mm)	460	475	485	490
Watts per foot (305mm)	13.3	13.3	13.3	13.3

Performance | Zipper Board Optics

Zipper Board Optics design has 72 diodes per foot (305mm).

Square 3520, Single Side Diffuse, black finish (FA-BL)

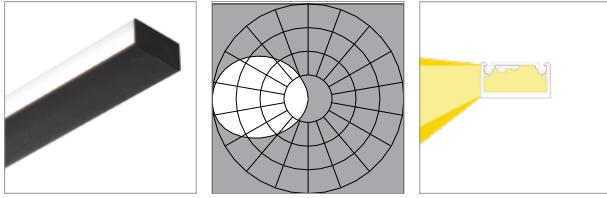

L80 >60,000 hours

90 CRI (90min., 96 avg.)

Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	25	26	27	27
Lumens per foot (305mm)	93	95	97	98
Watts per foot (305mm)	3.8	3.8	3.8	3.8


Standard Output (SO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	29	30	30	31
Lumens per foot (305mm)	185	191	195	197
Watts per foot (305mm)	6.6	6.6	6.6	6.6

High Output (HO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	29	29	30	30
Lumens per foot (305mm)	278	286	292	295
Watts per foot (305mm)	9.9	9.9	9.9	9.9

Performance | Zipper Board Optics | RGBW

Zipper Board Optics design has 72 diodes per foot (305mm).
 RGBW (red, green, blue, and white) tested with **all channels on**.

Square 3520, Single Side Diffuse, black finish (FA-BL)

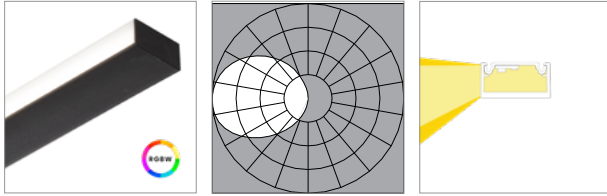

L80 >60,000 hours

RGBW Color, 90 CRI (90min., 96 avg.)

Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	21	22	22	23
Lumens per foot (305mm)	175	181	185	186
Watts per foot (305mm)	8.5	8.5	8.5	8.5

Standard Output (SO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	20	21	21	22
Lumens per foot (305mm)	263	271	277	280
Watts per foot (305mm)	13.3	13.3	13.3	13.3

Copyright © 2024 Vode Lighting LLC. All rights reserved. Vode, the Vode logo, BoxRail, FlyWing, MicroBaffle, Button Board, Zipper Board, Zero Canopy, Zero Block, VodeNODE and other names are either registered trademarks or trademarks of Vode Lighting LLC in the United States and may be registered in other countries. All other trademarks listed herein belong to their respective owners. Due to ongoing innovation, specification details may change without notice.