

IES Report



WingRail® | 107 | Clear with EdgeSoft™ | 80 CRI | LO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	110	114	116	116
Total Lumens, 4' rail length (1219mm)	1517	1565	1597	1597
Lumens per foot (305mm)	379	391	399	399
Input Power (W), 4' rail length (1219mm)	13.8	13.8	13.8	13.8
Watts per foot (305mm)	3.5	3.5	3.5	3.5
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report




WingRail® | 107 | Clear with EdgeSoft™ | 80 CRI | SO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	126	130	133	133
Total Lumens, 4' rail length (1219mm)	3034	3130	3194	3194
Lumens per foot (305mm)	759	783	799	799
Input Power (W), 4' rail length (1219mm)	24.1	24.1	24.1	24.1
Watts per foot (305mm)	6.1	6.1	6.1	6.1
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

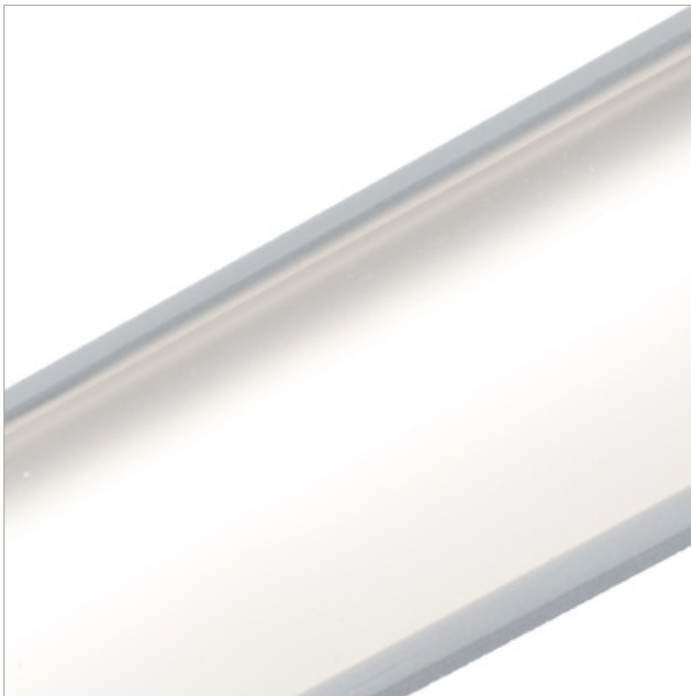

IES Report



WingRail® | 107 | Clear with EdgeSoft™ | 80 CRI | HO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	118	122	124	124
Total Lumens, 4' rail length (1219mm)	5765	5948	6069	6069
Lumens per foot (305mm)	1441	1487	1517	1517
Input Power (W), 4' rail length (1219mm)	49.1	49.1	49.1	49.1
Watts per foot (305mm)	12.3	12.3	12.3	12.3
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report



WingRail® | 107 | Clear with EdgeSoft™ | 90 CRI | LO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	95	98	100	101
Total Lumens, 4' rail length (1219mm)	1308	1349	1377	1391
Lumens per foot (305mm)	327	337	344	348
Input Power (W), 4' rail length (1219mm)	13.8	13.8	13.8	13.8
Watts per foot (305mm)	3.5	3.5	3.5	3.5
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report




WingRail® | 107 | Clear with EdgeSoft™ | 90 CRI | SO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	109	113	115	116
Total Lumens, 4' rail length (1219mm)	2616	2699	2754	2781
Lumens per foot (305mm)	654	675	688	695
Input Power (W), 4' rail length (1219mm)	24.0	24.0	24.0	24.0
Watts per foot (305mm)	6.0	6.0	6.0	6.0
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

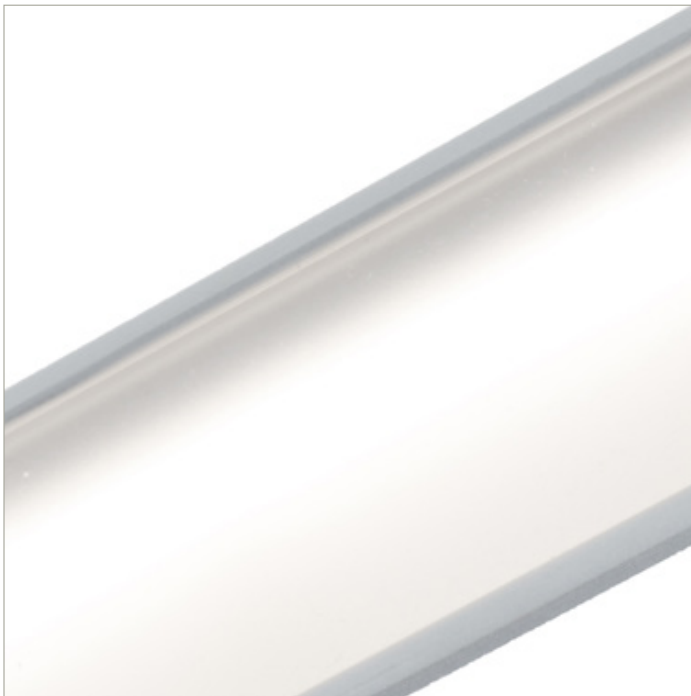

IES Report

WingRail® | 107 | Clear with EdgeSoft™ | 90 CRI | HO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-C1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	102	105	107	108
Total Lumens, 4' rail length (1219mm)	4970	5127	5232	5284
Lumens per foot (305mm)	1243	1282	1308	1321
Input Power (W), 4' rail length (1219mm)	49.1	49.1	49.1	49.1
Watts per foot (305mm)	12.3	12.3	12.3	12.3
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).