

IES Report

WingRail® | 107 | White Baffle with EdgeSoft™ | 90 CRI | LO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-WB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	79	82	83	84
Total Lumens, 4' rail length (1219mm)	1085	1119	1142	1153
Lumens per foot (305mm)	271	280	285	288
Input Power (W), 4' rail length (1219mm)	13.8	13.8	13.8	13.8
Watts per foot (305mm)	3.5	3.5	3.5	3.5
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored™ reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_LO_359_WB.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L121911519 (SOURCE REPORT FOR REFERENCE)
[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB
[ISSUE DATE] 12/23/2019
[MANUFAC] Vode Lighting
[LUMCAT] 107-WG-48-Z-LO-359-WB-AL
[LUMINAIRE] WingRail LED, 48", 3500K, 90 CRI, zipper board, white baffle,
[MORE] low output, clear anodized finish
[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1142
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	83
Total Luminaire Watts	13.82
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.62
Spacing Criterion (90-270)	1.16
Spacing Criterion (Diagonal)	1.22
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.11 ft
Luminous Width (90-270)	3.84 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	17714	13250	9235
55	16978	11407	7412
65	14910	9458	5753
75	12148	7722	4279
85	9347	6572	2191

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_LO_359_WB.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	509.0	509.0	509.0	509.0	509.0	509.0	509.0	509.0	509.0	509.0
5	534.5	534.0	534.0	533.5	532.5	531.5	530.5	529.0	528.0	526.0
10	557.5	557.0	556.0	555.0	553.5	551.0	549.0	546.0	542.5	539.0
15	573.0	572.5	571.0	569.0	566.5	563.0	559.0	554.5	549.5	544.0
20	581.0	580.5	578.5	575.5	571.5	566.5	561.0	554.5	547.0	539.5
25	581.0	580.0	577.5	573.5	568.0	561.5	553.5	544.5	535.0	525.0
30	573.5	572.0	568.5	563.0	555.5	546.5	536.5	524.5	512.0	499.5
35	557.0	555.0	550.5	543.5	533.5	522.0	509.0	494.5	479.5	463.5
40	530.0	528.0	522.0	513.0	501.0	487.0	470.5	453.5	436.5	419.5
45	492.0	489.5	482.5	472.0	458.5	441.0	423.0	404.0	385.5	368.0
50	442.5	439.5	432.0	420.5	405.5	387.0	368.0	348.5	330.5	313.0
55	382.5	380.0	372.0	360.0	345.0	327.0	309.0	290.5	273.5	257.0
60	316.0	313.5	306.5	295.5	281.0	266.0	249.5	233.5	218.0	204.0
65	247.5	245.0	239.5	230.5	219.0	206.0	192.5	179.5	166.0	157.0
70	181.5	180.0	175.5	169.0	161.5	152.0	142.0	132.0	122.5	114.5
75	123.5	122.5	119.5	115.5	110.0	103.5	97.0	90.5	84.0	78.5
80	73.0	72.5	71.0	68.5	66.0	62.5	58.5	55.0	51.0	47.5
85	32.0	31.5	31.5	30.5	30.0	29.0	27.5	26.0	24.0	22.5
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Vert. Angles **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>	<u>95</u>
0	509.0	509.0	509.0	509.0	509.0	509.0	509.0	509.0	509.0	509.0
5	524.5	522.5	520.5	518.5	516.5	514.0	511.5	509.5	507.0	504.5
10	535.5	531.5	527.0	522.5	518.0	513.0	508.0	503.0	498.0	493.0
15	538.0	532.0	525.0	518.5	511.5	504.5	497.5	490.0	482.5	475.5
20	531.5	523.0	514.0	505.0	496.0	486.5	477.5	468.5	459.0	450.0
25	514.5	503.0	492.0	481.0	470.0	459.0	448.5	438.0	427.5	417.0
30	486.5	473.0	460.0	447.0	435.0	423.0	411.5	400.5	389.5	378.0
35	449.0	433.5	419.5	406.0	393.5	381.5	370.0	359.0	347.5	336.0
40	403.0	387.0	372.5	359.0	347.0	335.5	324.0	313.5	302.5	291.5
45	351.0	336.0	321.5	308.5	297.0	286.0	275.5	266.0	256.5	246.0
50	296.0	281.5	268.0	256.0	245.5	236.0	227.0	218.5	210.0	200.5
55	242.0	228.5	216.5	206.0	197.0	188.5	180.5	173.5	167.0	159.5
60	191.0	179.5	169.0	160.5	153.0	146.0	139.5	134.0	128.0	122.5
65	146.0	137.0	129.0	121.5	115.0	109.5	104.5	100.0	95.5	90.5
70	107.0	100.0	93.5	88.0	83.0	78.5	74.5	70.5	67.0	63.5
75	73.0	68.5	64.0	60.0	56.0	52.0	49.0	46.0	43.5	40.5
80	44.0	41.0	38.5	35.5	33.0	30.5	27.5	25.0	23.0	21.0
85	20.5	19.0	17.5	16.0	14.5	13.0	11.0	9.0	7.5	7.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Vert. Angles **Horizontal Angles**

	<u>100</u>	<u>105</u>	<u>110</u>	<u>115</u>	<u>120</u>	<u>125</u>	<u>130</u>	<u>135</u>	<u>140</u>	<u>145</u>
0	509.0	509.0	509.0	509.0	509.0	509.0	509.0	509.0	509.0	509.0
5	502.0	499.5	497.5	495.0	493.0	491.0	489.0	487.0	485.5	484.0
10	488.0	483.0	478.0	473.0	467.5	463.0	458.5	454.0	450.0	446.5
15	468.0	460.0	452.0	444.5	436.5	429.0	421.5	414.0	407.0	400.5
20	440.5	430.5	420.5	410.0	399.0	388.0	377.5	366.0	355.5	345.5
25	406.0	394.5	382.0	369.0	355.0	341.5	327.5	313.0	299.0	286.5
30	366.0	353.0	338.5	324.0	307.5	291.0	275.0	259.0	244.0	231.0
35	323.5	309.5	294.0	277.5	259.5	242.5	226.0	210.5	196.5	184.5

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_LO_359_WB.IES

CANDELA TABULATION - (Cont.)

40	279.0	264.5	249.5	232.5	215.0	198.5	184.0	170.5	159.0	149.0
45	234.0	220.5	206.5	191.0	175.5	161.5	149.0	137.5	128.5	120.5
50	190.5	179.0	166.5	154.0	141.0	129.5	119.5	110.5	103.5	97.5
55	151.0	141.0	131.5	121.0	111.0	102.0	94.0	87.5	82.5	77.5
60	115.5	108.0	100.5	92.5	85.0	78.5	72.5	67.5	63.5	60.0
65	85.5	80.0	74.5	68.5	63.0	58.0	53.5	50.0	47.0	44.5
70	60.0	55.5	51.5	47.5	43.5	40.5	37.0	34.5	32.5	30.5
75	38.0	35.5	32.5	30.0	27.0	25.0	22.5	21.0	19.5	18.5
80	20.0	18.5	17.0	15.0	13.5	12.0	11.0	10.0	9.5	8.5
85	6.5	6.0	5.0	4.5	3.5	3.0	2.5	2.5	2.0	2.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Vert. Angles **Horizontal Angles**

	<u>150</u>	<u>155</u>	<u>160</u>	<u>165</u>	<u>170</u>	<u>175</u>	<u>180</u>
0	509.0	509.0	509.0	509.0	509.0	509.0	509.0
5	482.5	481.5	480.0	479.5	479.0	478.5	478.5
10	443.0	440.0	437.5	435.5	434.0	433.0	433.0
15	394.5	389.0	384.5	380.5	378.0	376.5	376.0
20	336.5	328.5	321.5	316.0	312.0	309.5	308.5
25	275.0	265.0	256.5	250.5	245.5	242.5	241.5
30	219.5	209.5	201.5	195.5	191.0	188.5	187.5
35	174.5	166.5	159.5	155.0	151.5	149.0	148.5
40	141.0	134.5	129.5	125.5	123.0	121.0	120.5
45	114.5	109.5	105.5	102.5	100.5	99.5	99.0
50	92.5	89.0	86.0	84.0	82.5	81.5	81.0
55	74.0	71.0	69.0	67.5	66.0	65.5	65.0
60	57.5	55.0	53.5	52.0	51.5	51.0	50.5
65	42.5	41.0	40.0	39.0	38.5	38.0	38.0
70	29.5	28.0	27.5	26.5	26.5	26.0	26.0
75	17.5	17.0	16.5	16.0	16.0	15.5	15.5
80	8.5	8.0	7.5	7.5	7.5	7.0	7.0
85	1.5	1.5	1.5	1.5	1.5	1.0	1.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_LO_359_WB.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	182.63	N.A.	16.00
0-30	375.44	N.A.	32.90
0-40	590.56	N.A.	51.70
0-60	959.17	N.A.	84.00
0-80	1126.85	N.A.	98.70
0-90	1141.91	N.A.	100.00
10-90	1093.88	N.A.	95.80
20-40	407.93	N.A.	35.70
20-50	611.93	N.A.	53.60
40-70	479.22	N.A.	42.00
60-80	167.67	N.A.	14.70
70-80	57.08	N.A.	5.00
80-90	15.07	N.A.	1.30
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1141.91	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	48.03
10-20	134.60
20-30	192.81
30-40	215.11
40-50	204.01
50-60	164.61
60-70	110.60
70-80	57.08
80-90	15.07
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_LO_359_WB.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	105	101	98	107	103	99	96	99	96	93	95	93	90	91	89	88	86
2	101	93	87	81	98	91	85	80	88	83	78	84	80	77	81	78	75	73
3	92	82	75	69	90	81	74	68	78	72	67	75	70	66	73	68	65	63
4	85	74	65	59	83	72	65	59	70	63	58	68	62	57	65	60	56	54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	50	48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	48	44	42
7	68	55	46	40	66	54	46	40	52	45	40	51	45	40	50	44	39	38
8	63	50	42	36	62	49	42	36	48	41	36	47	41	36	46	40	36	34
9	59	46	38	33	58	46	38	33	45	38	33	43	37	33	42	37	32	31
10	56	43	35	30	54	42	35	30	41	35	30	40	34	30	40	34	30	28

POLAR GRAPH

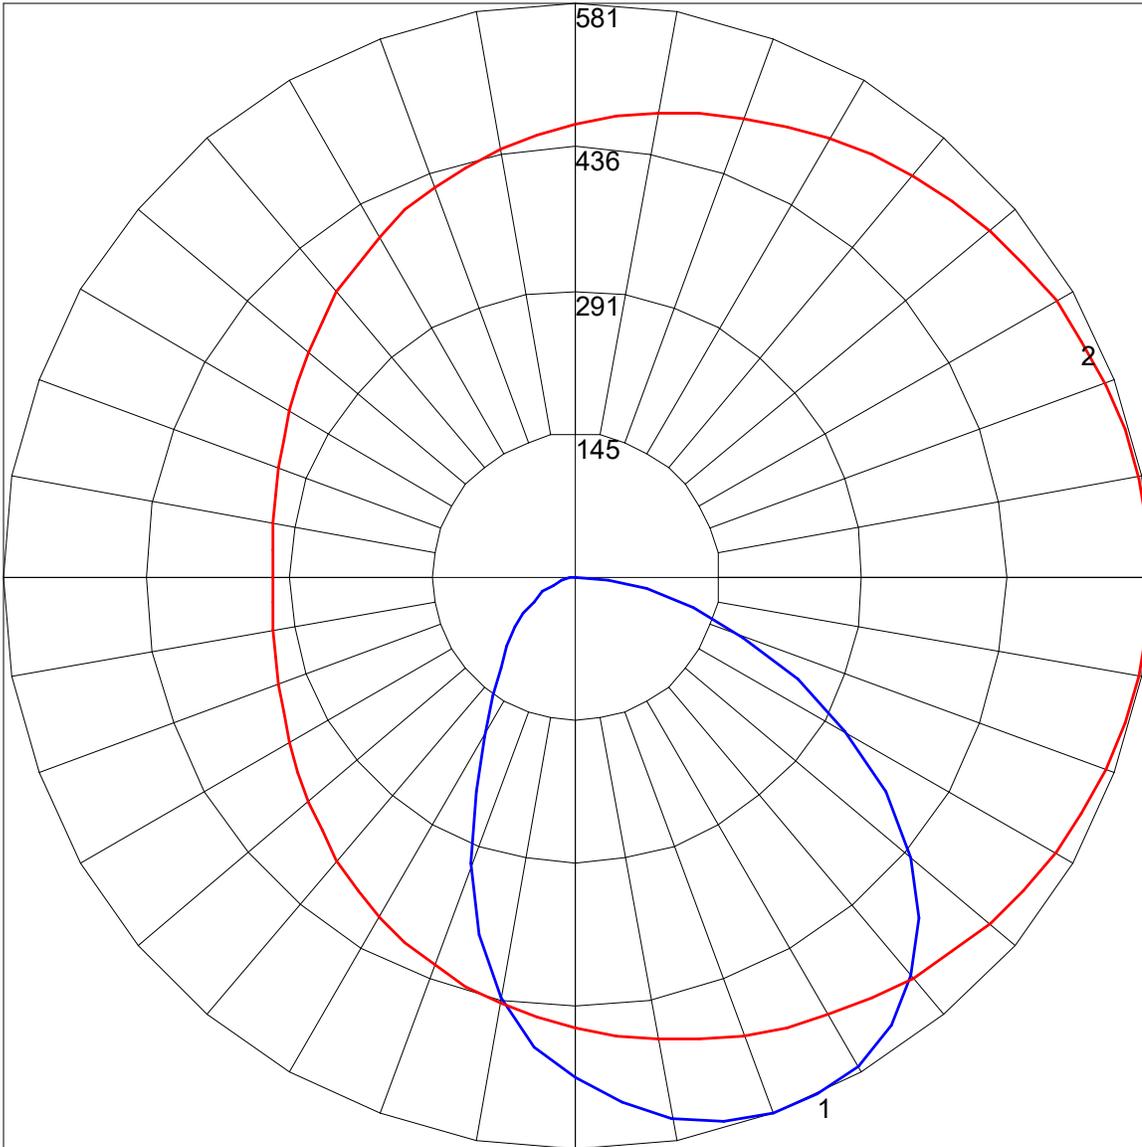

Maximum Candela = 581 Located At Horizontal Angle = 0, Vertical Angle = 20
1 - Vertical Plane Through Horizontal Angles (0 - 180)
2 - Horizontal Cone Through Vertical Angle (20) (Through Max. Cd.)