

IES Report




BoxRail® | 107 | 40° Symmetric | 80 CRI | LO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	34	35	35	35
Total Lumens, 4' rail length (1219mm)	458	472	482	482
Lumens per foot (305mm)	114	118	120	120
Input Power (W), 4' rail length (1219mm)	13.8	13.8	13.8	13.8
Watts per foot (305mm)	3.5	3.5	3.5	3.5
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

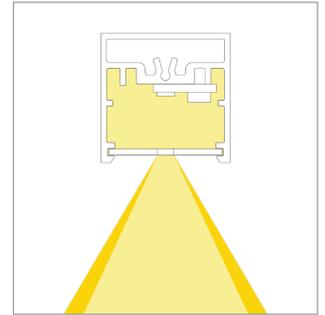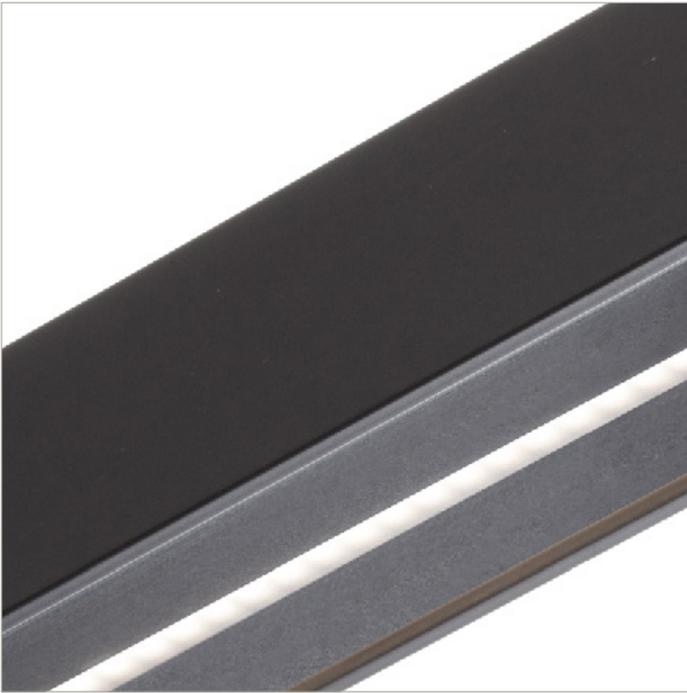

IES Report




BoxRail® | 107 | 40° Symmetric | 80 CRI | SO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	39	40	41	41
Total Lumens, 4' rail length (1219mm)	916	945	964	964
Lumens per foot (305mm)	229	236	241	241
Input Power (W), 4' rail length (1219mm)	23.9	23.9	23.9	23.9
Watts per foot (305mm)	6.0	6.0	6.0	6.0
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

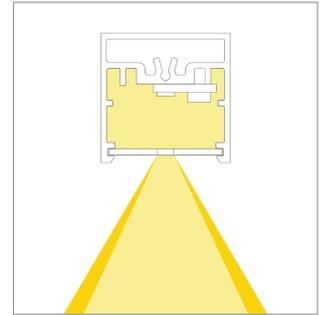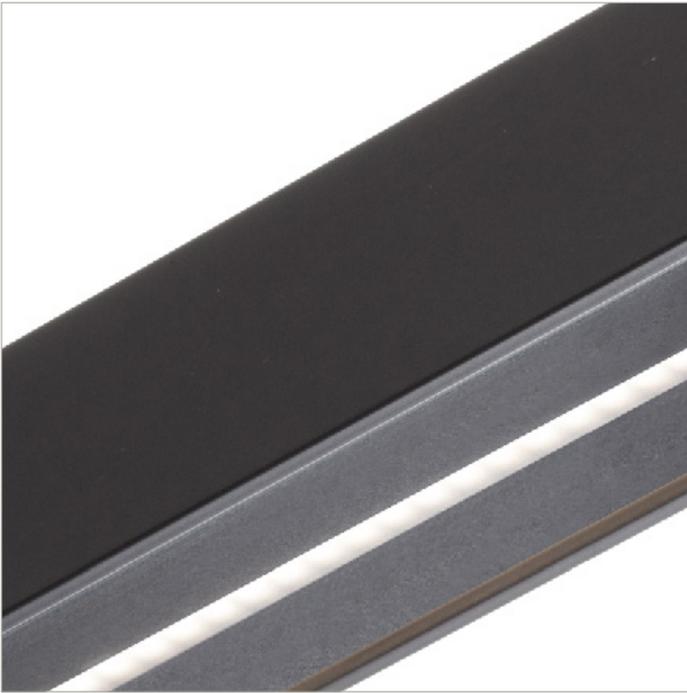

IES Report




BoxRail® | 107 | 40° Symmetric | 80 CRI | HO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	36	37	38	38
Total Lumens, 4' rail length (1219mm)	1740	1795	1832	1832
Lumens per foot (305mm)	435	449	458	458
Input Power (W), 4' rail length (1219mm)	49.1	49.1	49.1	49.1
Watts per foot (305mm)	12.3	12.3	12.3	12.3
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

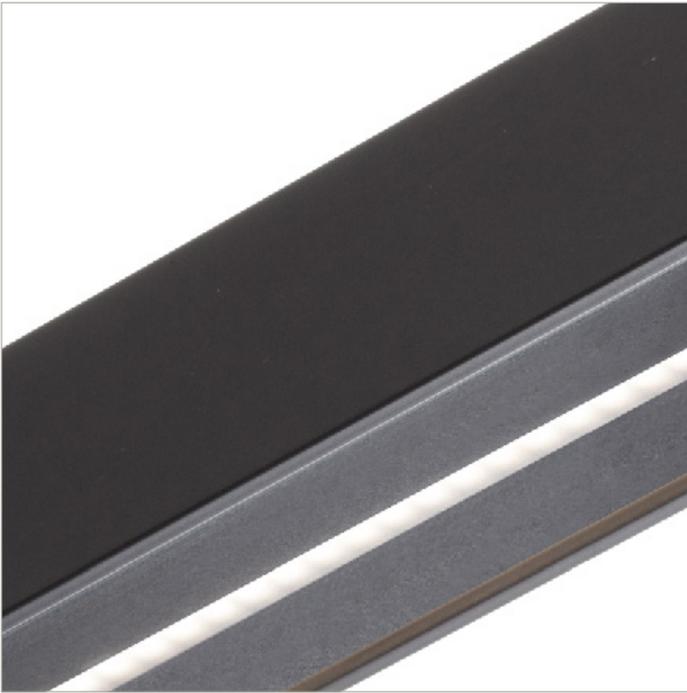

IES Report




BoxRail® | 107 | 40° Symmetric | 90 CRI | LO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	29	30	31	31
Total Lumens, 4' rail length (1219mm)	395	407	416	420
Lumens per foot (305mm)	99	102	104	105
Input Power (W), 4' rail length (1219mm)	13.8	13.8	13.8	13.8
Watts per foot (305mm)	3.5	3.5	3.5	3.5
CRI	94	94	94	94

Due to the large number of options in Vode’s product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

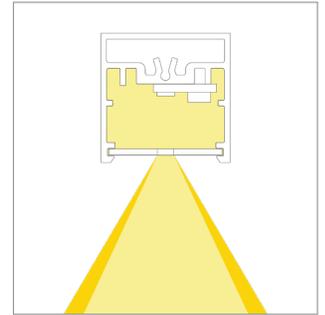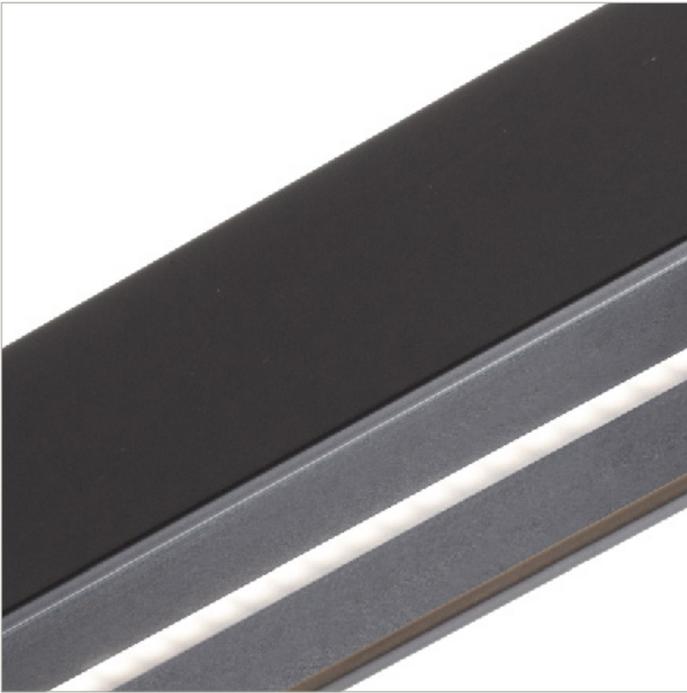

IES Report




BoxRail® | 107 | 40° Symmetric | 90 CRI | SO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	34	35	35	36
Total Lumens, 4' rail length (1219mm)	789	814	831	839
Lumens per foot (305mm)	197	204	208	210
Input Power (W), 4' rail length (1219mm)	23.9	23.9	23.9	23.9
Watts per foot (305mm)	6.0	6.0	6.0	6.0
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

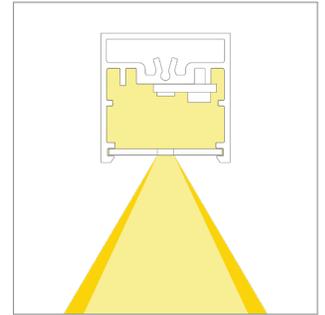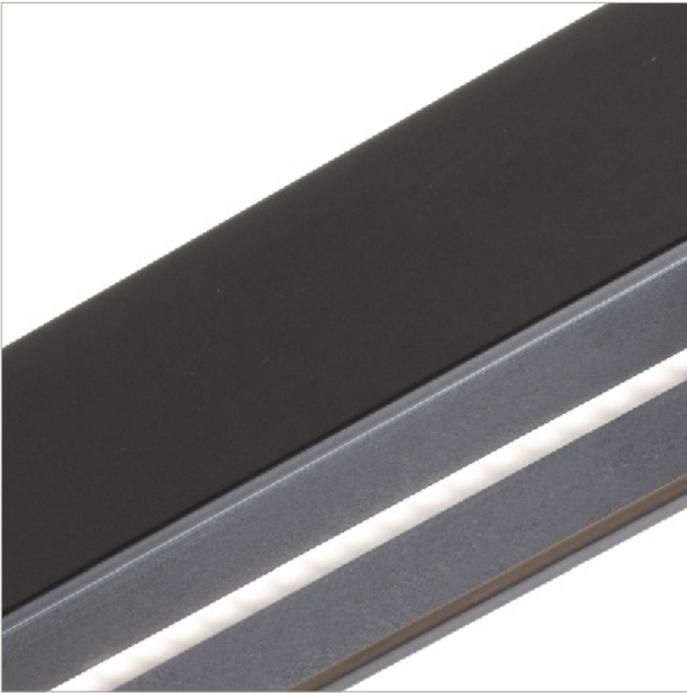

IES Report

BoxRail® | 107 | 40° Symmetric | 90 CRI | HO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-S1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	31	32	33	33
Total Lumens, 4' rail length (1219mm)	1500	1547	1579	1595
Lumens per foot (305mm)	375	387	395	399
Input Power (W), 4' rail length (1219mm)	49.1	49.1	49.1	49.1
Watts per foot (305mm)	12.3	12.3	12.3	12.3
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).