



Spec Guide

RaceRail | Ceiling-Wall Arm | 107



Direct or indirect lighting for open office, wall wash and ambient applications.



RaceRail: direct or indirect, 370° rotation


Benefits & Features

Super Slim, Adaptive Design
Round profile, Ø1.12 in.


Superior Light Quality & Performance
Output up to 1507 lm/ft (HO), 132 lm/W (HO). 90 CRI static & tunable white 2200K - 5000K. Custom ranges available upon request.

High Performance Optics
Break through Batwing lens designed for excellent fixture to fixture spacing.

Better Optics & Beam Control Options
Batwing, FlyWing, and diffuse lens available. Directional control with 370° rotation, angle gauge and lock.

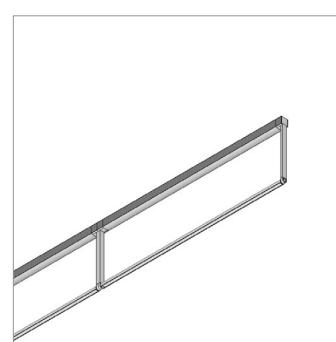

Integral Power

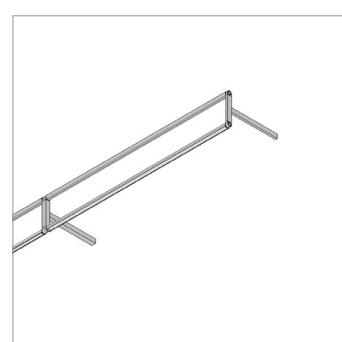

Double Rail with Tee,
Zero Canopy™

Build Your Specification

| 107-RR | | | | | | | |
|------------------|---------------------------|-------------------------------------|---|---|----------------|--|--|
| System Code | Rail Type | Single/Double Rail | System Length | Rail Length | Mounting | Arm Length | |
| 107 System 107 | Singular Rail | 01 Single Rail | Specify overall system length in ft/in or M/mm. | 24 24" (610mm) | CA Ceiling Arm | 1.25 1.25" arm (32mm) ¹ | |
| | RR RaceRail | 03 Double Rail with 3" (76mm) Tee | | 36 36" (914mm) | WA Wall Arm | 3 3" arm (76mm) | |
| | Dual Hub ² | 06 Double Rail with 6" (152mm) Tee | | 48 48" (1219mm) | | 6 6" arm (152mm) | |
| | 2R RaceRail - RaceRail | 12 Double Rail with 12" (305mm) Tee | | 60 60" (1524mm) | | 12 12" arm (305mm) | |
| | ZZ Other (please specify) | DH Double Rail with Dual Hub | Corner and Shapes available See Guide | 72 72" (1829mm) | | 18 18" arm (457mm) ² | |
| | ZZ Other (please specify) | ZZ Other (please specify) | for details. | ZZ Other rail length or layout (please specify) | | 24 24" arm (610mm) ² | |
| | | | | | | ZZ Other (please specify) ² | |

See [Rail Length Chart](#)
for more details.

⚠ Custom lengths may result in light gaps on the fixture.
See [Rail Length Chart](#) for more details.

| ▶▶ | | ▶▶ | |
|----------------|--|------------|---------|
| Power Location | | Power Type | Voltage |

Integral Power

IP Integral Power

Remote Power

Specify mounting and harness length code
example: 2R25, 4R25...etc.

Mounting Option

| | Wire Harness |
|------------------------|--------------------------------|
| 00 Zero Canopy | 10 10' (3.048m) Wire Harness |
| 0B Zero Block | 25 25' (7.62m) Wire Harness |
| 2R Small Round Canopy | 50 50' (15.24m) Wire Harness |
| 2S Small Square Canopy | 75 75' (22.86m) Wire Harness |
| 4R Large Round Canopy | 100 100' (30.48m) Wire Harness |
| 4S Large Square Canopy | |

Power Type

Flexible 1 to 1 Power

| | |
|-----|--|
| AE | 0-10V, 1.0% Dimming |
| AT | 0-10V, 0.1% Dimming |
| AD | DALI, 0.1% Dimming |
| AX | DMX, 100-0% Dimming |
| AH | Hi-lume 1% EcoSystem, Soft On / Fade to Black Technology, LDE ¹ |
| AH2 | ELV 1% 2-wire (Forward and Reverse Phase) ⁷ |

Optimized Power

Add 'O' to power type
example: AEO, ATO...etc.³

VodeNODE

Add 'N' to power type for Flexible 1 to 1 Power
Add 'ON' to power type for Optimized Power
example: AEN, ATN, AEON, ADON...etc.⁴

ZZ Other (please specify)

See [Power Guide](#) for driver features & limitations.

| ▶▶ | | Z | | | | |
|-----------------|----------|--------------|-------------------|--------|---------|--|
| Emergency Power | LED Type | Lumen Output | Color Temperature | Optics | Sensors | |

0 No Emergency Power
ZZ Emergency Power
(specify requirements)

Z Zipper Board

| | |
|----|------------------------|
| LO | Low Output |
| SO | Standard Output |
| HO | High Output |
| ZZ | Other (please specify) |

See [IES Files](#) page for details.

See [Power Guide](#) for driver features & limitations.

| | |
|----------|-------------------|
| 90+ CRI | Zipper Board™ (Z) |
| 27 2700K | 2 Diffuse, round |
| 30 3000K | G1 120° Batwing |
| 35 3500K | G2 120° FlyWing |
| 40 4000K | |

ZZ Tunable White Available
See [Guide](#) for details.

| Finish | Options |
|---------------------------|---------------------------------------|
| AL Clear Anodized | 0 None |
| WH White Powder Coat | 9 9' 18/3 Cord and Plug ⁵ |
| BL Black Anodized | CPP Chicago Plenum Power ⁶ |
| ZZ Other (please specify) | |

NOTES & LIMITATIONS

¹ 1.25" arm length is not available with Zero Block™ (0B).

² For arms 18" and longer, wall-mounted systems include a cable tie-back.

³ Optimized Power is not available with Hi-lume 1% EcoSystem (AHO) Power Type.

⁴ VodeNODE enclosure is not available with ELV 1% 2-wire (AH2) Power Type.

⁵ 9' 18/3 Cord and Plug only available with Remote Power (RP).

⁶ Chicago Plenum not applicable for wall arm mounting.

⁷ Lengths of 24" and shorter are not supported due to driver limitations. Daisy chaining multiple fixtures to achieve minimum load is permitted but may introduce installation complexity—consult factory for layout guidance.

⁸ Dual Hub comes with a powered and non-powered side. Refer to installation instructions for orientation restrictions.

Listed to UL standards for damp location by a Nationally Recognized Testing Laboratory (NRTL) recognized by OSHA. Certain limitations exist for each Certification. Contact factory for verification.



Standard 5 Year Limited Warranty. See details [here](#). Contact factory for options on Limited Warranties up to 20 years.

Applications

General Interior and Open Office



Hicksons Lawyers, Barangaroo, Sydney, Australia



Open Office: rendering.



Newport Beach Civic Center, Newport Beach, CA

Sustainability & Certifications

DECLARE

International Living Future Institute (ILFI)



All Vode Lighting linear light fixtures proudly carry the Red List Approved designation.

Declare.

Vode Adaptive Architectural Lighting Systems

Vode Lighting LLC

Final Assembly: Sonoma, California, US

Life Expectancy: 10+ Year(s)

End of Life Options: Recyclable (100%)

Ingredients:

Steel; Anodized Aluminum (6063-T5 Alloy); Small Electrical Component (RoHS); Copper; **Fluorinated Ethylene Propylene (masterbatch)**; Polymethyl methacrylate (PMMA); Stainless Steel; Polyoxymethylene Copolymer (POM); Styrene-butadiene polymer, hydrogenated; Poly(methyl methacrylate/butyl acrylate/styrene) (PMMA/BA/S); Styrene/butadiene copolymer; Distillates; Polypropylene; Calcium carbonate; Polycarbonate; EVA Copolymer; Methyl methacrylate (MMA); Polyphenylene Oxide; Brass; Tin, Organic

Living Building Challenge Criteria: Compliant

I-13 Red List:

| | |
|---|-----------------------------|
| <input type="checkbox"/> LBC Red List Free | % Disclosed: 100% at 100ppm |
| <input checked="" type="checkbox"/> LBC Red List Approved | VOC Content: Not Applicable |
| <input type="checkbox"/> Declared | |

I-10 Interior Performance: Not Applicable

I-14 Responsible Sourcing: Not Applicable

VDE-0001

EXP. 01 FEB 2026

Original Issue Date: 2018

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

Click here to learn more: [International Living Future Institute](http://international-living-future-institute.org)

BAA X BABA

Buy American Act / Build America & Buy America Act Compliance

Vode is dedicated to supporting domestic manufacturing and ensuring compliance with BAA and BABA requirements.

Given the complexity of our products, we recommend reaching out to vodecares@vode.com for confirmation regarding compliance for your specific project.



Click here to learn more: [US Department of Commerce](http://usdc.gov)


Structure

| | |
|-----------------------|---|
| Rail Lengths | 24" (610mm) - 72" (1829mm). Modified lengths available. See Rail Length Chart for more details. |
| Rail Dimensions | $\varnothing 1.12"$ (28mm) x length. |
| Construction | Extruded and machined 6063 aluminum. |
| Mounting | Ceiling or wall mount to jbox or driver housing. |
| Arm Length | 1.25" (32mm) – 24" (610mm). Non-standard arm lengths available. |
| System Run Length | 24" (610mm) minimum. Unlimited maximum. |
| Operating Temperature | 32°F to 104°F (0°C to 40°C). |
| Humidity | 0-85%, non-condensing. |
| System Weight | 0.88lbs per ft (0.40kg per 305mm) Power supply and housing not included. |


Materials

| | |
|-----------------------------------|--|
| LED Board Construction | Aluminum core PCB, black LCP connectors, RoHS compliant. |
| Lens | High-impact extruded acrylic glass (PMMA). |
| Power Cable | $\varnothing 4$ mm, 18/2 AWG, Plenum (CMP) rated semi-rigid PVC or FEP, flame tested UL-910 (<i>PVC free in 2020</i>). |
| Cable Connectors | Unfilled black nylon, rated UL 94 V-0, halogen free, PVC or FEP overmold, RoHS compliant (<i>PVC free in 2020</i>). |
| Remote Linear Power Housing (RLP) | 0.7" x 2.375" x 2.53", 0.054" formed Galvanized Steel. |
| Remote Brick Power Housing (RBH) | 4.32" x 3.37" x .078" Galvanized Steel mounting plate. |


Dimensions

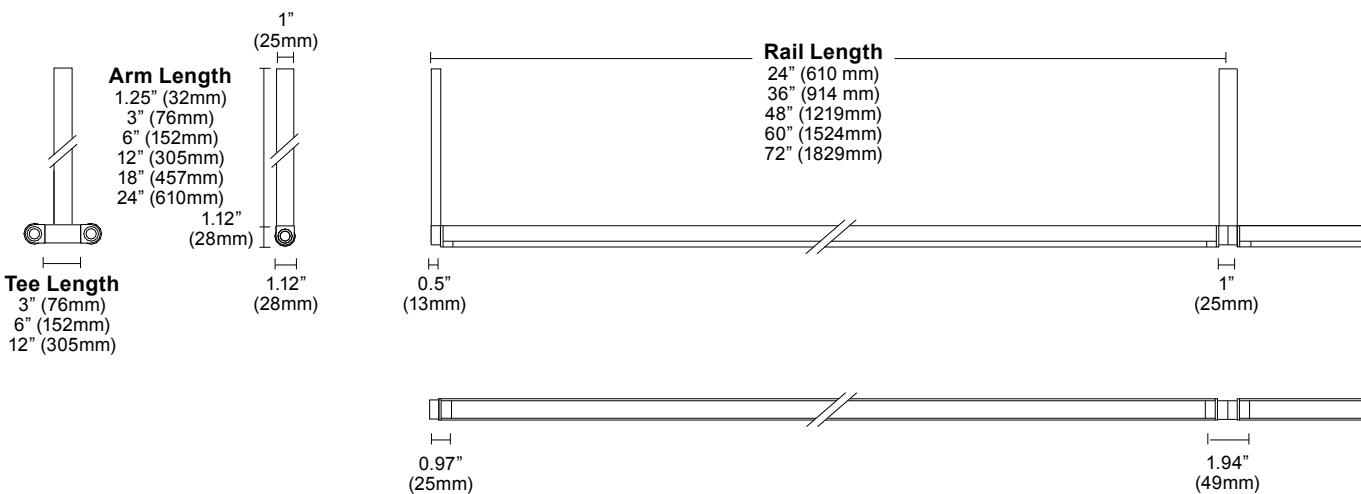

Mounting Options

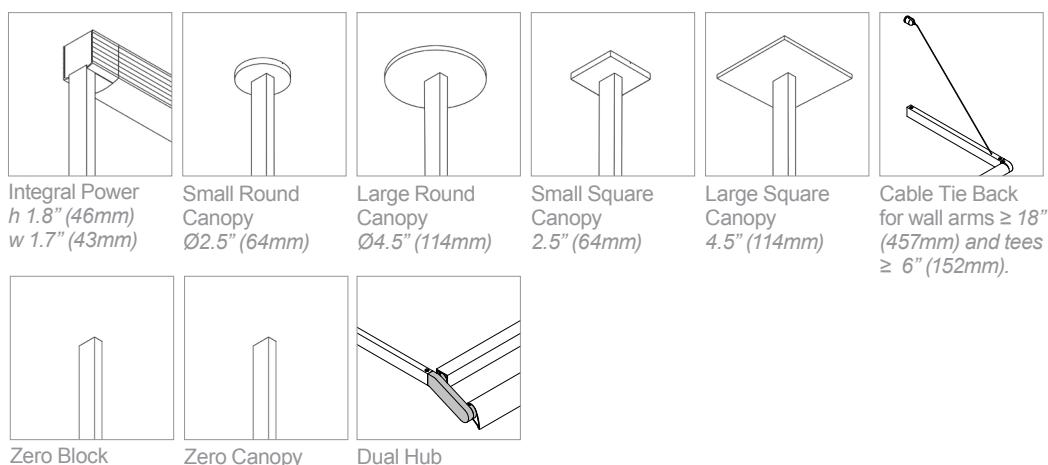

Layout

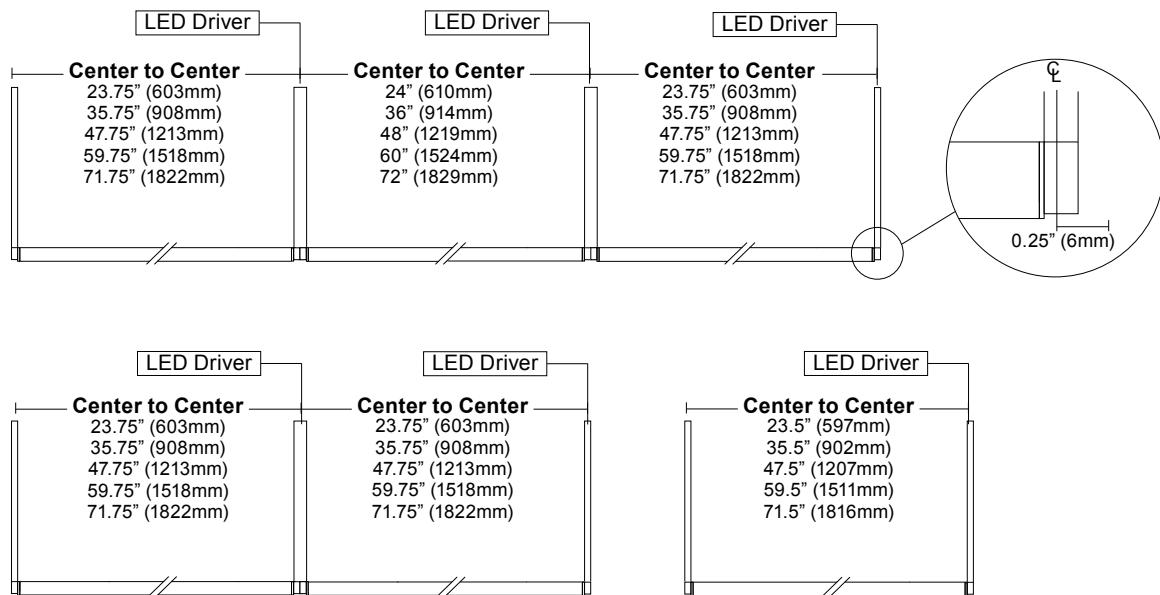


Corner and Shapes Available (Square, Rectangle, L-Shape, U-Shape, ZigZag) [See Guide](#) for details.

Power and Controls

| | |
|------------------|--|
| Power Type | Class 2 (<60V output) constant current driver. |
| Dimming Controls | Dimming (0.1%, 1%), 0-10V, DALI, DMX, Hi-lume 1% are available. See Power Guide for details. |
| Input Voltage | 120V - 277V, 50/60hz. |
| Power Location | Integral or remote power. Maximum remote distance up to 100' (30.5m) depending on driver selection. See Power Guide for details. |


Vode power locations fall into two categories: integral and remote. Remote power is locating the power supply away from the fixture. Remote power comes in two housing styles: brick style and linear style. Consult [Power Guide](#) to determine which type you will receive. Integral power is locating the power supply into the lighting fixture or mounting.

Remote Brick Power Housing

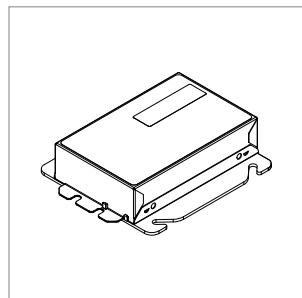


Supplied for some remote power applications. One remote power supply housing is supplied for each rail. Provided driver mounting plate fits standard 4" metal, square J-Boxes with a minimum volume of 21 in³ (J-Box not provided). See [Tech Sheet](#) for details.

Remote Linear Power Housing

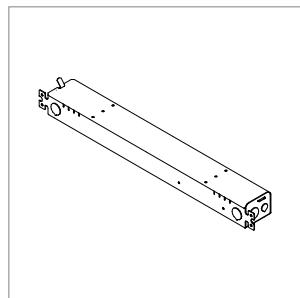


One remote power supply housing is supplied with each power supply. All Vode linear remote drivers come in a 0.054" (0.8mm) formed galvanized steel power supply housing with five (5) knockouts: (4) 1-1/8", (1) 7/8" and (1) 9/16". Accommodates standard linear power supplies. See [Tech Sheet](#) for details.

Integral Power

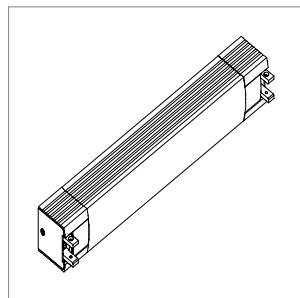

Houses integral power supply. Direct conduit feed recommended. Housing mounts to standard North America 4" j-box. Mounts to most surfaces. Blocking recommended at all arm junctions. See [Tech Sheet](#) for details.

Wire Harness

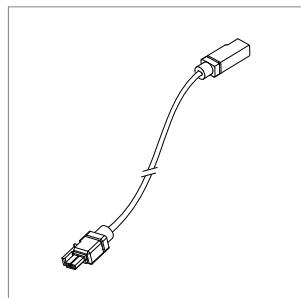


Wire harness connects driver to rail section. Lengths of 10' (3.0m) & 25' (7.6m) with snap-lock connectors for quick and easy installation. Multiple harnesses may be combined for lengths up to 100' (30.5m). See [Tech Sheet](#) for details.

Power and Controls

Flexible 1 to 1 power


For Flexible 1 to 1 Power, Vode supplies one single output driver per fixture, allowing each fixture to be controlled independently. Direct/Indirect fixtures are supplied with two single output drivers, allowing the direct and indirect lighting to be controlled independently. Consult [Power Guide](#) to determine which type you will receive.

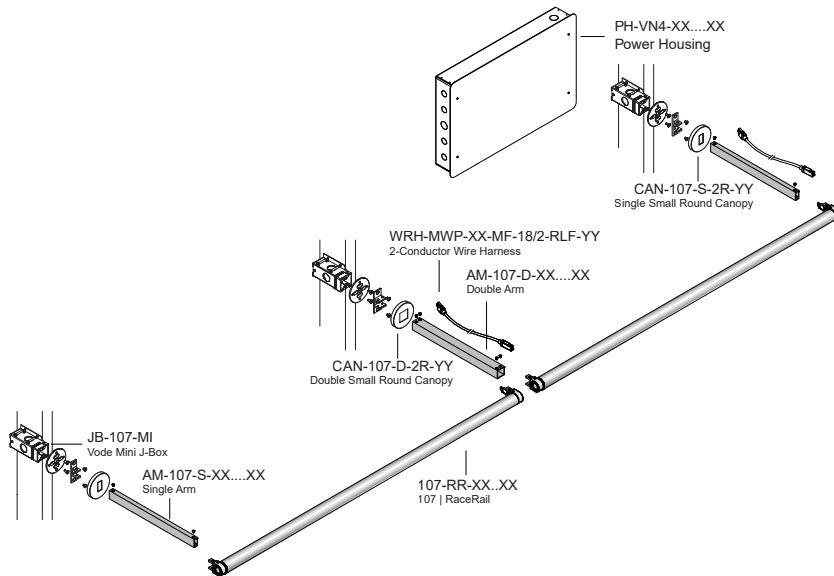

Optimized Power

To optimize power, Vode configures specifications with drivers that have 2 or 4 outputs. Depending on system configurations and power requirements, up to 4 fixtures can be powered from a 4-output driver. Consult [Power Guide](#) to determine which type you will receive.

IMPORTANT: Each fixture will still require individual wire harnesses, as shown below.

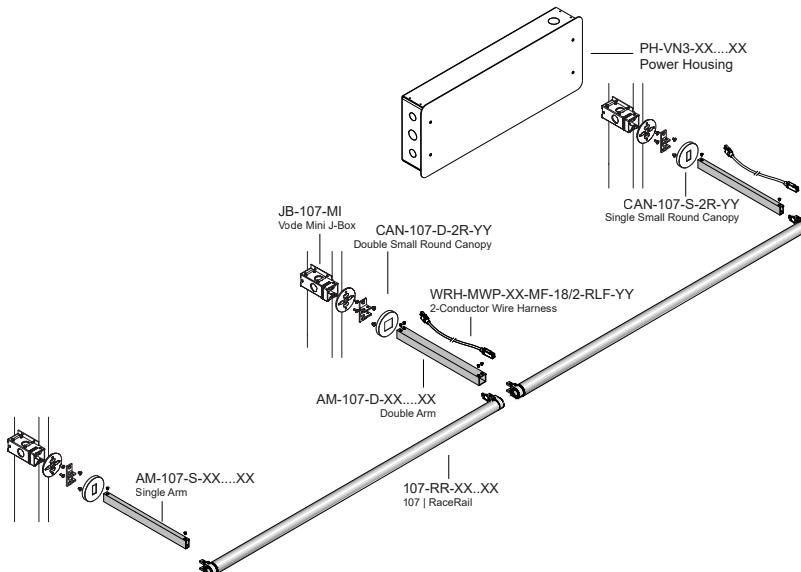


Note: Drawings not to scale, for reference only.

Performance | Zipper Board Optics

Zipper Board Optics design has 72 diodes per foot (305mm).

Diffuse, round (2)

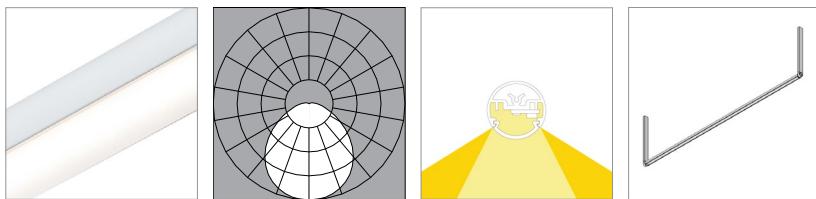

L80 >60,000 hours

90 CRI (90min., 96 avg.)

Low Output (LO)

| | 2700K | 3000K | 3500K | 4000K |
|----------------------------|-------|-------|-------|-------|
| Efficacy - Lumens per Watt | 109 | 112 | 114 | 115 |
| Lumens per foot (305mm) | 373 | 385 | 392 | 396 |
| Watts per foot (305mm) | 3.5 | 3.5 | 3.5 | 3.5 |


Standard Output (SO)

| | 2700K | 3000K | 3500K | 4000K |
|----------------------------|-------|-------|-------|-------|
| Efficacy - Lumens per Watt | 125 | 129 | 132 | 133 |
| Lumens per foot (305mm) | 746 | 769 | 785 | 793 |
| Watts per foot (305mm) | 6.0 | 6.0 | 6.0 | 6.0 |

High Output (HO)

| | 2700K | 3000K | 3500K | 4000K |
|----------------------------|-------|-------|-------|-------|
| Efficacy - Lumens per Watt | 116 | 120 | 122 | 123 |
| Lumens per foot (305mm) | 1416 | 1461 | 1491 | 1506 |
| Watts per foot (305mm) | 12.3 | 12.3 | 12.3 | 12.3 |

120° Batwing (G1)

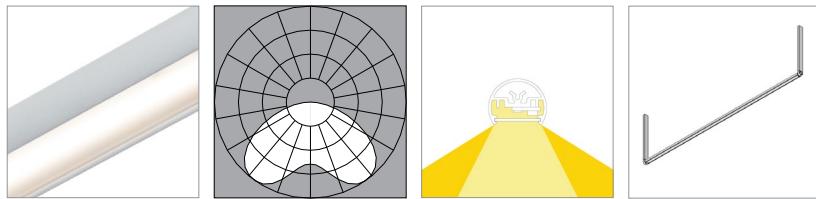

L80 >60,000 hours

90 CRI (90min., 96 avg.)

Low Output (LO)

| | 2700K | 3000K | 3500K | 4000K |
|----------------------------|-------|-------|-------|-------|
| Efficacy - Lumens per Watt | 85 | 87 | 89 | 90 |
| Lumens per foot (305mm) | 315 | 325 | 332 | 335 |
| Watts per foot (305mm) | 3.8 | 3.8 | 3.8 | 3.8 |

Standard Output (SO)

| | 2700K | 3000K | 3500K | 4000K |
|----------------------------|-------|-------|-------|-------|
| Efficacy - Lumens per Watt | 106 | 109 | 111 | 112 |
| Lumens per foot (305mm) | 630 | 650 | 663 | 670 |
| Watts per foot (305mm) | 6.0 | 6.0 | 6.0 | 6.0 |


High Output (HO)

| | 2700K | 3000K | 3500K | 4000K |
|----------------------------|-------|-------|-------|-------|
| Efficacy - Lumens per Watt | 98 | 101 | 103 | 104 |
| Lumens per foot (305mm) | 1197 | 1235 | 1260 | 1273 |
| Watts per foot (305mm) | 12.4 | 12.4 | 12.4 | 12.4 |

Performance | Zipper Board Optics

Zipper Board Optics design has 72 diodes per foot (305mm).

120° FlyWing (G2)

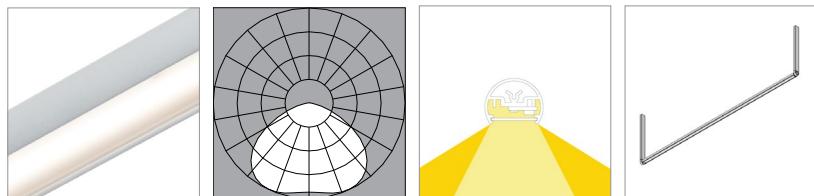

L80 is >60,000 hours

90 CRI (90min., 96 avg.)

Low Output (LO)

| | 2700K | 3000K | 3500K | 4000K |
|----------------------------|-------|-------|-------|-------|
| Efficacy - Lumens per Watt | 93 | 96 | 98 | 99 |
| Lumens per foot (305mm) | 319 | 329 | 336 | 339 |
| Watts per foot (305mm) | 3.5 | 3.5 | 3.5 | 3.5 |

Standard Output (SO)

| | 2700K | 3000K | 3500K | 4000K |
|----------------------------|-------|-------|-------|-------|
| Efficacy - Lumens per Watt | 107 | 110 | 113 | 114 |
| Lumens per foot (305mm) | 639 | 659 | 672 | 679 |
| Watts per foot (305mm) | 6.0 | 6.0 | 6.0 | 6.0 |

High Output (HO)

| | 2700K | 3000K | 3500K | 4000K |
|----------------------------|-------|-------|-------|-------|
| Efficacy - Lumens per Watt | 99 | 103 | 105 | 106 |
| Lumens per foot (305mm) | 1213 | 1252 | 1277 | 1290 |
| Watts per foot (305mm) | 12.3 | 12.3 | 12.3 | 12.3 |

Patent Marking

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here. To learn more, visit <https://www.vode.com/about/legal>

Copyright

Copyright © 2025 Vode Lighting LLC. All rights reserved. Vode, the Vode logo, BoxRail, FlyWing, MicroBaffle, Button Board, Zipper Board, Zero Canopy, Zero Block, VodeNODE and other names are either registered trademarks or trademarks of Vode Lighting LLC in the United States and may be registered in other countries. All other trademarks listed herein belong to their respective owners. Due to ongoing innovation, specification details may change without notice.