



Spec Guide

# WingRail | Table Arm | 107



Task lighting for table, workstation, and carrel desk applications.



WingRail: direct or indirect, 370° rotation.

### Benefits & Features

#### Minimal Profile, Robust Design

Asymmetric profile, 1.14 in x 2.12 in.

#### Superior Light Quality & Performance

Output up to 1376 lm/ft (HO), 121 lm/W (HO). 90 CRI static & tunable white 2200K - 5000K. Custom ranges available upon request.

#### High Performance Optics

Break through Batwing lens designed for excellent fixture to fixture spacing.

#### Better Optics & Beam Control Options

Asymmetric distribution. White or black baffle, EdgeSoft™ lens or diffuse lens and narrow optics available. Directional control with 370° rotation, angle gauge and lock.



Arm Anchor®



Double Rail with Tee, Arm Anchor, Continuous System

## Build Your Specification

107-WG						TA	
<b>System Code</b>	<b>Rail Type</b>	<b>Single/Double Rail</b>		<b>System Length</b>	<b>Rail Length</b>	<b>Mounting</b>	<b>Arm Length</b>
107 System   107	<b>Singular Rail</b>	<b>01</b>	Single Rail	Specify overall	<b>24</b> 24" (610mm)	<b>TA</b> Table Arm	<b>18</b> 18" arm (457mm)
	<b>WG</b> WingRail	<b>03</b>	Double Rail with 3" (76mm) Tee	system length	<b>36</b> 36" (914mm)		<b>ZZ</b> Other (please specify) <sup>1</sup>
		<b>06</b>	Double Rail with 6" (152mm) Tee	in ft/in or M/mm.	<b>48</b> 48" (1219mm)		
	<b>Dual Hub</b> <sup>6</sup>	<b>12</b>	Double Rail with 12" (305mm) Tee		<b>60</b> 60" (1524mm)		
	<b>2W</b> WingRail - WingRail	<b>DH</b>	Double Rail with Dual Hub	<i>Corner and Shapes available See Guide for details.</i>	<b>ZZ</b> Other rail length or layout (please specify)		
	<b>ZZ</b> Other (please specify)	<b>DH03</b>	Double Rail with Dual Hub with 3" (76mm) Tee			See <a href="#">Rail Length Chart</a> for more details.	
		<b>DH06</b>	Double Rail with Dual Hub with 6" (152mm) Tee				
		<b>DH12</b>	Double Rail with Dual Hub with 12" (305mm) Tee			<b>▲ Custom lengths may result in light gaps on the fixture. See Rail Length Chart for more details.</b>	
		<b>ZZ</b>	Other (please specify)				

<b>Power Location</b>		<b>Power Type</b> <sup>*</sup>		<b>Voltage</b>		<b>Emergency Power</b>	
Remote Power		<b>Flexible 1 to 1 Power</b>		<b>1</b> 120V	<b>0</b> No Emergency Power		
Specify mounting and harness length code example: <b>2T25, 2T50</b> ...etc.		<b>AE</b> 0-10V, 1.0% Dimming		<b>2</b> 120V - 277V	<b>ZZ</b> Emergency Power	(specify requirements)	
<b>Mounting Option</b>	<b>Wire Harness</b>	<b>AD</b> DALI, 0.1% Dimming		<b>X</b> Not Yet Specified			
<b>2T</b> Arm Anchor	<b>10</b> 10' (3.048m) Wire Harness	<b>AX</b> DMX, 100-0% Dimming					
	<b>25</b> 25' (7.62m) Wire Harness	<b>AH</b> Hi-lume 1% EcoSystem, Soft On / Fade to Black Technology, LDE <sup>1</sup>					
	<b>50</b> 50' (15.24m) Wire Harness	<b>AH2</b> ELV 1% 2-wire (Forward and Reverse Phase) <sup>5</sup>					
	<b>75</b> 75' (22.86m) Wire Harness						
	<b>100</b> 100' (30.48m) Wire Harness						
		<b>Optimized Power</b>					
		Add 'O' to power type example: AEO, ATO...etc. <sup>2</sup>					
		<b>VodeNODE</b>					
		Add 'N' to power type for Flexible 1 to 1 Power					
		Add 'ON' to power type for Optimized Power example: AEN, ATN, AEON, ADON...etc. <sup>3</sup>					
		<b>ZZ</b> Other (please specify)					
		See <a href="#">Power Guide</a> for driver features & limitations.					

Z							
<b>LED Type</b>		<b>Lumen Output</b> <sup>*</sup>		<b>Color Temperature</b>		<b>Optics</b>	
<b>Z</b> Zipper Board		<b>LO</b> Low Output		<b>90+</b> CRI		<b>Zipper Board (Z)</b>	
		<b>SO</b> Standard Output		<b>27</b> 2700K		<b>WB</b> White Baffle with EdgeSoft™	<b>0</b> None
		<b>HO</b> High Output		<b>30</b> 3000K		<b>BB</b> Black Baffle with EdgeSoft	<b>ZZ</b> Other
		<b>ZZ</b> Other (please specify)		<b>35</b> 3500K		<b>C1</b> Clear with Edge Softening	(specify requirements)
				<b>40</b> 4000K		<b>D1</b> Diffuse	
		See <a href="#">IES Files</a> page for details.					
		See <a href="#">Power Guide</a> for driver features & limitations.		<b>ZZ</b> Tunable White Available			
				See <a href="#">Guide</a> for details.			

<b>Finish</b>		<b>Options</b>	
<b>AL</b> Clear Anodized		<b>0</b>	None
<b>WH</b> White Powder Coat		<b>1</b>	On/Off Switch <sup>4</sup>
<b>BL</b> Black Anodized		<b>9</b>	9' 18/3 Cord and Plug
<b>ZZ</b> Other (please specify)		<b>CPP</b>	Chicago Plenum Power

### NOTES & LIMITATIONS

- <sup>1</sup> Arm lengths > 48" not recommended.
- <sup>2</sup> Optimized Power is not available with Hi-lume 1% EcoSystem (AHO) Power Type.
- <sup>3</sup> VodeNODE enclosure is not available with ELV 1% 2-wire (AH2) Power Type.
- <sup>4</sup> One On/Off Switch per LED Driver.
- <sup>5</sup> Lengths of 24" and shorter are not supported due to driver limitations. Daisy chaining multiple fixtures to achieve minimum load is permitted but may introduce installation complexity—consult factory for layout guidance.
- <sup>6</sup> Dual Hub comes with a powered and non-powered side. Refer to installation instructions for orientation restrictions.

Standard 5 Year Limited Warranty. See details [here](#). Contact factory for options on Limited Warranties up to 20 years.

Listed to UL standards for damp location by a Nationally Recognized Testing Laboratory (NRTL) recognized by OSHA. Certain limitations exist for each Certification. Contact factory for verification.



## Applications

### Corporate, Educational, and Library



Saddleback College Library, Mission Viego, CA



Libbie Mill Library, Richmond, VA



Penn State University, Dickinson School of Law Library, University Park, PA

## Sustainability & Certifications

### DECLARE

#### International Living Future Institute (ILFI)

Red List  
Approved

All Vode Lighting linear light fixtures proudly carry the Red List Approved designation.

# Declare.

#### Vode Adaptive Architectural Lighting Systems Vode Lighting LLC

**Final Assembly:** Sonoma, California, US

**Life Expectancy:** 10+ Year(s)

**End of Life Options:** Recyclable (100%)

#### Ingredients:

Steel; Anodized Aluminum (6063-T5 Alloy); Small Electrical Component (RoHS); Copper; **Fluorinated Ethylene Propylene (masterbatch)**; Polymethyl methacrylate (PMMA); Stainless Steel; Polyoxymethylene Copolymer (POM); Styrene-butadiene polymer, hydrogenated; Poly(methyl methacrylate/butyl acrylate/styrene) (PMMA/BA/S); Styrene/butadiene copolymer; Distillates; Polypropylene; Calcium carbonate; Polycarbonate; EVA Copolymer; Methyl methacrylate (MMA); Polyphenylene Oxide; Brass; Tin, Organic

**Living Building Challenge Criteria:** Compliant

#### I-13 Red List:

- LBC Red List Free      % Disclosed: 100% at 100ppm  
 LBC Red List Approved      VOC Content: Not Applicable  
 Declared

**I-10 Interior Performance:** Not Applicable

**I-14 Responsible Sourcing:** Not Applicable

VDE-0001  
EXP. 01 FEB 2026  
Original Issue Date: 2018

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)

### BAA X BABA

#### Buy American Act / Build America & Buy America Act Compliance

Vode is dedicated to supporting domestic manufacturing and ensuring compliance with BAA and BABA requirements.

Given the complexity of our products, we recommend reaching out to [vodecares@vode.com](mailto:vodecares@vode.com) for confirmation regarding compliance for your specific project.



Click here to learn more: [US Department of Commerce](https://www.usdoj.gov/commerce)


## Structure

Rail Lengths	24" (610mm) - 60" (1524mm). Modified lengths available. See <a href="#">Rail Length Chart</a> for more details.
Rail Dimensions	1.14" (29mm) x 2.12" (54mm) x length.
Construction	Extruded and machined 6063 aluminum. Clear anodized, black anodized, white painted and other finishes available.
Mounting	Table mount to Arm Anchor®.
Arm Length	18" (457mm). Non-standard arm lengths available. Arm lengths > 48" (1219mm) not recommended.
System Run Length	24" (610mm) minimum. Unlimited maximum.
Operating Temperature	32°F to 104°F (0°C to 40°C).
Humidity	0-85%, non-condensing.
Weight	1.04 lbs per ft (0.47kg per 305mm). Power supply and housing not included.


## Materials

LED Board Construction	Aluminum core PCB, black LCP connectors, RoHS compliant.
Clear Lens, Diffuse Lens	High-impact extruded acrylic glass (PMMA).
Baffle	6063 Aluminum, RoHS compliant painted finish.
Power Cable	Ø4mm, 18/2 AWG, Plenum (CMP) rated semi-rigid PVC or FEP, flame tested UL-910 (PVC free in 2020).
Cable Connectors	Unfilled black nylon, rated UL 94 V-0, halogen free, PVC or FEP overmold, RoHS compliant (PVC free in 2020).
Remote Linear Power Housing (RLP)	20.7" x 2.375" x 2.53", 0.054" formed Galvanized Steel.
Remote Brick Power Housing (RBP)	4.32" x 3.37" x .078" Galvanized Steel mounting plate.

## Dimensions

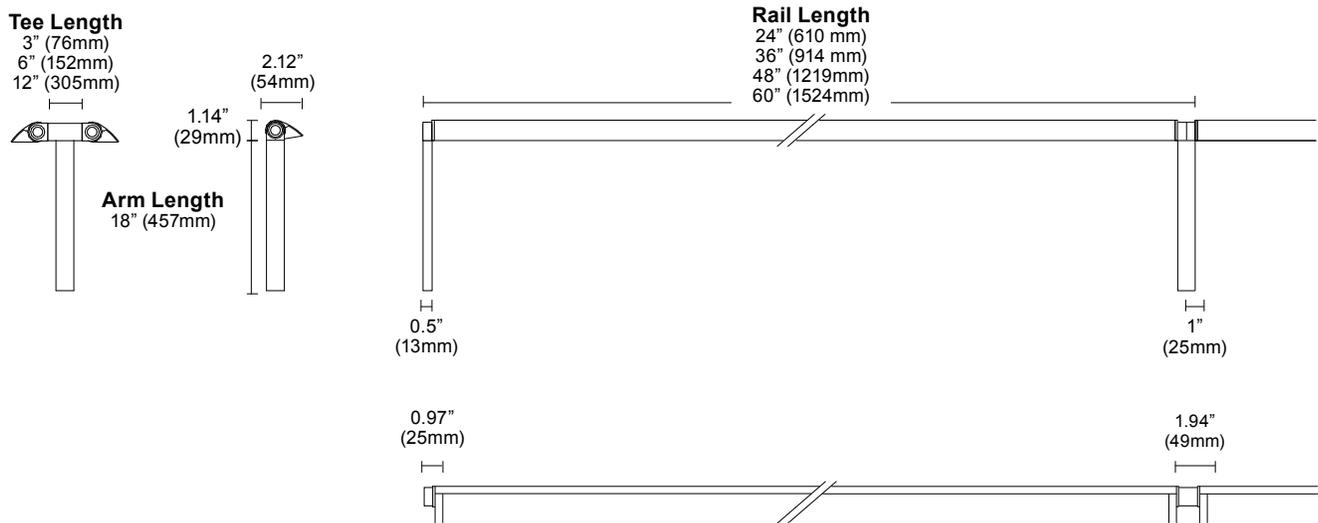

## Mounting Options

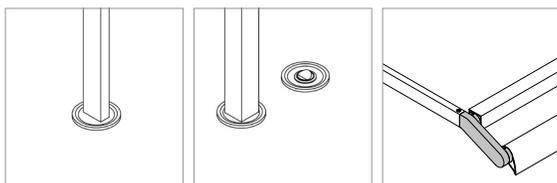


Arm Anchor®  
 h0.1" (3mm)  
 Ø2" (51mm)

On/Off Switch  
 (optional)

Dual Hub

## Layout

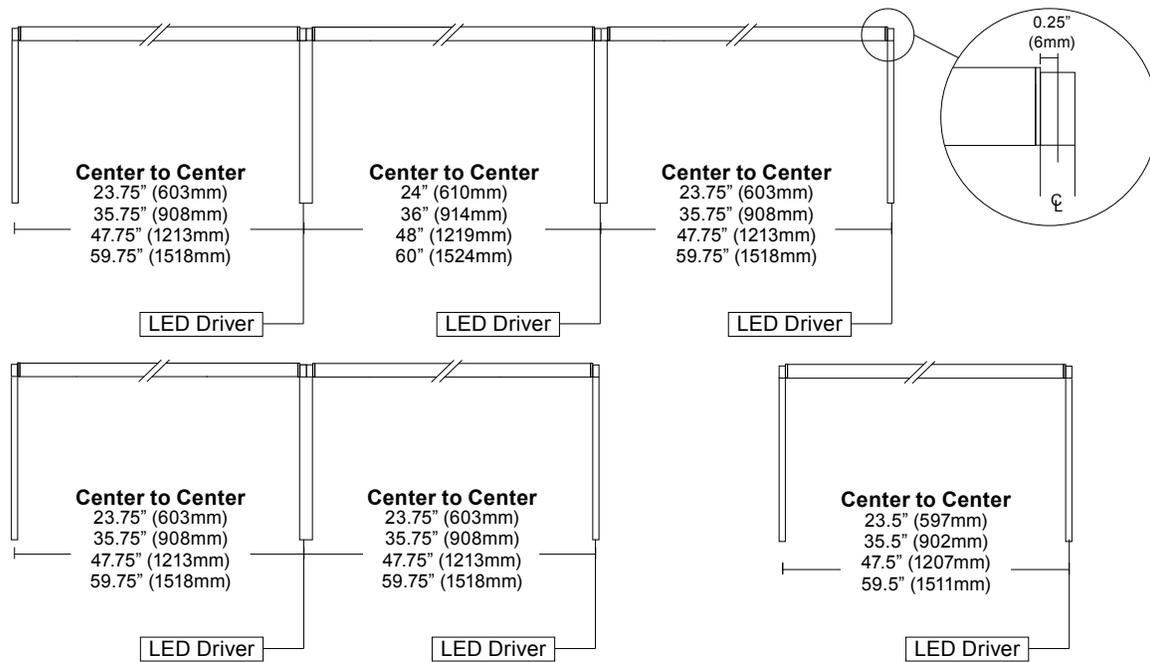


Corner and Shapes Available (Square, Rectangle, L-Shape, U-Shape, ZigZag) [See Guide](#) for details.

## Power and Controls

Power Type	Class 2 (<60V output) constant current driver.
Dimming Controls	Dimming (0.1%, 1%), 0-10V, DALI, DMX, Hi-lume 1% are available. <a href="#">See Power Guide</a> for details.
Input Voltage	120V - 277V, 50/60hz.
Power Location	Remote power. Maximum remote distance up to 100' (30.5m) <i>depending</i> on driver selection. <a href="#">See Power Guide</a> for details.


Remote power is locating the power supply away from the fixture. Remote power comes in two housing styles: brick style and linear style. Consult [Power Guide](#) to determine which type you will receive.

### Remote Brick Power Housing

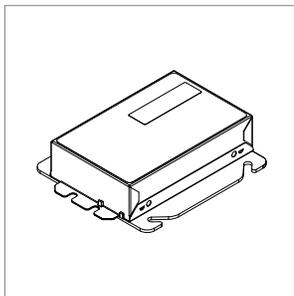


Supplied for some remote power applications. One remote power supply housing is supplied for each rail. Provided driver mounting plate fits standard 4" metal, square J-Boxes with a minimum volume of 21 in<sup>3</sup> (J-Box not provided). See [Tech Sheet](#) for details.

### Remote Linear Power Housing

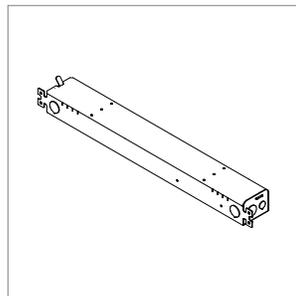

One remote power supply housing is supplied with each power supply. All Vode linear remote drivers come in a 0.054" (0.8mm) formed galvanized steel power supply housing with five (5) knockouts: (4) 1-1/8", (1) 7/8" and (1) 9/16". Accommodates standard linear power supplies. See [Tech Sheet](#) for details.

### Wire Harness

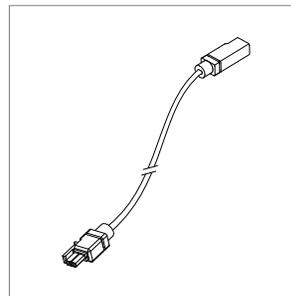


Wire harness connects driver to rail section. Lengths of 10' (3.0m) & 25' (7.6m) with snap-lock connectors for quick and easy installation. Multiple harnesses may be combined for lengths up to 100' (30.5m). See [Tech Sheet](#) for details.

## Power and Controls

### Flexible 1 to 1 power


For Flexible 1 to 1 Power, Vode supplies one single output driver per fixture, allowing each fixture to be controlled independently. Direct/Indirect fixtures are supplied with two single output drivers, allowing the direct and indirect lighting to be controlled independently. Consult [Power Guide](#) to determine which type you will receive.

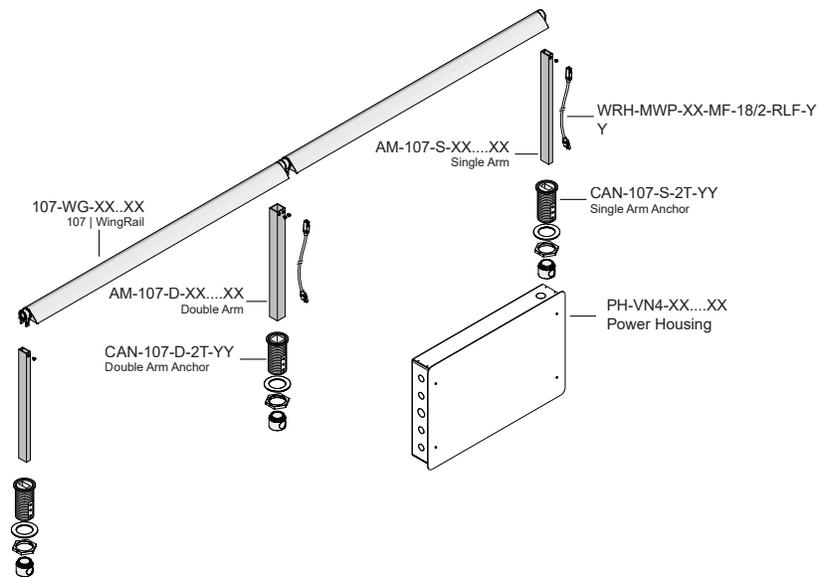

### Optimized Power

To optimize power, Vode configures specifications with drivers that have 2 or 4 outputs. Depending on system configurations and power requirements, up to 4 fixtures can be powered from a 4-output driver. Consult [Power Guide](#) to determine which type you will receive.

IMPORTANT: Each fixture will still require individual wire harnesses, as shown below.

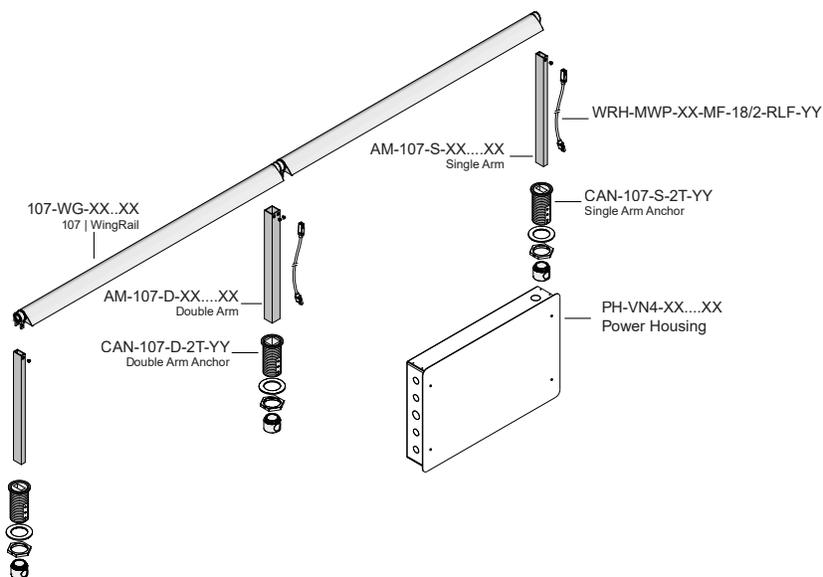


Note: Drawings not to scale, for reference only.

## Performance | Zipper Board Optics

Zipper Board Optics design has 72 diodes per foot (305mm).

### White Baffle with EdgeSoft™ (WB)

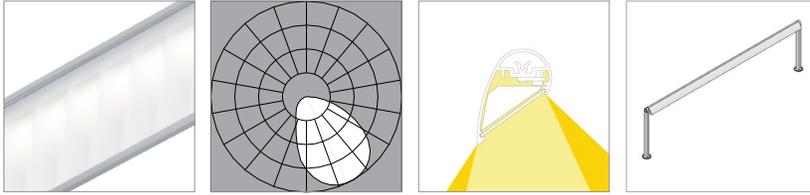

L80 >60,000 hours


**90 CRI (90min., 96 avg.)**

<b>Low Output (LO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	79	82	83	84
Lumens per foot (305mm)	271	280	285	288
Watts per foot (305mm)	3.5	3.5	3.5	3.5

<b>Standard Output (SO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	91	94	96	97
Lumens per foot (305mm)	542	560	571	577
Watts per foot (305mm)	6.0	6.0	6.0	6.0

<b>High Output (HO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	84	87	89	90
Lumens per foot (305mm)	1031	1063	1085	1096
Watts per foot (305mm)	12.3	12.3	12.3	12.3

### Black Baffle with EdgeSoft™ (BB)

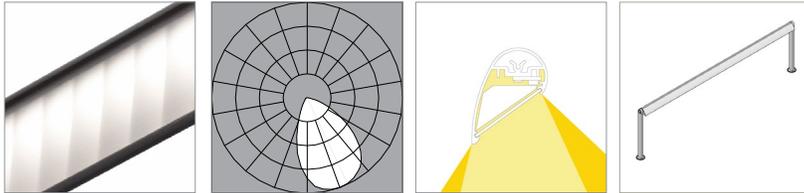

L80 >60,000 hours

**90 CRI (90min., 96 avg.)**

<b>Low Output (LO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	50	51	52	53
Lumens per foot (305mm)	170	175	179	180
Watts per foot (305mm)	3.5	3.5	3.5	3.5


<b>Standard Output (SO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	57	59	60	61
Lumens per foot (305mm)	339	350	357	361
Watts per foot (305mm)	6.0	6.0	6.0	6.0

<b>High Output (HO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	53	55	56	56
Lumens per foot (305mm)	644	665	678	685
Watts per foot (305mm)	12.3	12.3	12.3	12.3

## Performance | Zipper Board Optics

Zipper Board Optics design has 72 diodes per foot (305mm).

Clear with EdgeSoft™ (C1)

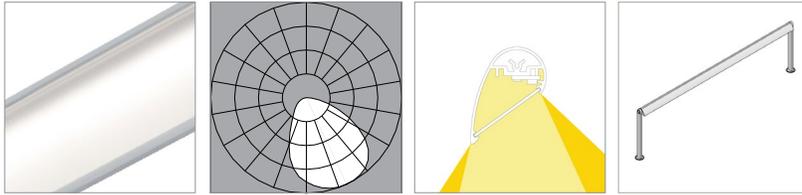

L80 >60,000 hours


**90 CRI (90min., 96 avg.)**

<b>Low Output (LO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	95	98	100	101
Lumens per foot (305mm)	327	337	344	348
Watts per foot (305mm)	3.5	3.5	3.5	3.5

<b>Standard Output (SO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	109	113	115	116
Lumens per foot (305mm)	654	675	688	695
Watts per foot (305mm)	6.0	6.0	6.0	6.0

<b>High Output (HO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	102	105	107	108
Lumens per foot (305mm)	1243	1282	1308	1321
Watts per foot (305mm)	12.3	12.3	12.3	12.3

Diffuse (D1)

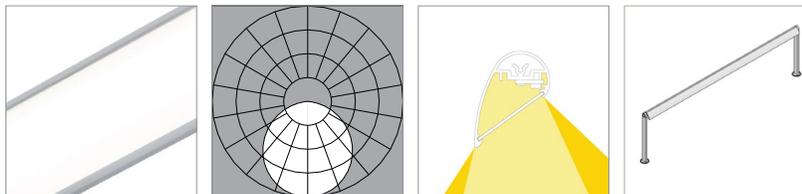

L80 is >60,000 hours

**90 CRI (90min., 96 avg.)**

<b>Low Output (LO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	68	70	72	73
Lumens per foot (305mm)	234	241	246	248
Watts per foot (305mm)	3.5	3.5	3.5	3.5

<b>Standard Output (SO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	78	81	83	83
Lumens per foot (305mm)	467	482	492	497
Watts per foot (305mm)	6.0	6.0	6.0	6.0

<b>High Output (HO)</b>	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	73	75	77	77
Lumens per foot (305mm)	888	916	935	944
Watts per foot (305mm)	12.3	12.3	12.3	12.3

## Patent Marking

---

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here. To learn more, visit <https://www.vode.com/about/legal>

## Copyright

---

*Copyright © 2025 Vode Lighting LLC. All rights reserved. Vode, the Vode logo, BoxRail, FlyWing, MicroBaffle, Button Board, Zipper Board, Zero Canopy, Zero Block, VodeNODE and other names are either registered trademarks or trademarks of Vode Lighting LLC in the United States and may be registered in other countries. All other trademarks listed herein belong to their respective owners. Due to ongoing innovation, specification details may change without notice.*