



Spec Guide

ZipThree® | Wall Mount | 707



Direct/indirect lighting for ceiling wash, wall wash and grazing applications.



ZipThree, Ceiling Wash Uplight, Wall Graze Downlight (with EdgeGlow)

Benefits & Features

Micro Profile, Robust Design

Flat profile, 0.27" (7mm) x 3.78" (96mm)

Superior Light Quality & Performance

Outputs up to: 2808 lm/ft (9212 lm/m), 149 lm/W (SO). 90 CRI & tunable white (2200K-6500K) available.

Remote Power with Independent Channel Control

Power may be located up to 100' (30.5m) away. Direct/indirect circuits may be independently controlled.

A Floating Line of Light with EdgeGlow™ Option

Optional EdgeGlow™ for edge-lit detail. Hidden mud-in or surface-mount hardware.



Wall Graze Downlight only



Ceiling Wash Uplight only

Build Your Specification

707-Z3

SL

0

System & Rail Type	System Type	System Length	Rail Length	Mounting	Arm/Cord Length
707-Z3 ZipThree	SL Standard Linear	Specify overall system length in ft/in or M/mm.	<div>12 12.2" (310mm)</div> <div>24 24" (610 mm)</div> <div>36 36" (914 mm)</div> <div>48 48" (1219 mm)</div> <div>60 60" (1524 mm)</div> <div>72 72" (1829 mm)</div> <div>96 96" (2438mm)</div> <div>ZZ Other rail length or layout (please specify)</div> <div>See Rail Length Chart for more details.</div> <div>⚠ Custom lengths may result in light gaps on the fixture. See Rail Length Chart for more details.</div>	<div>S1 Surface Mount</div> <div>M1 Zero Mount (Mud-in)</div>	<div>0 None</div>

Power Location	Power Type	Voltage	Emergency Power
Remote Power	Flexible 1 to 1 Power	<div>1 120V</div> <div>2 120V - 277V</div> <div>X Not Yet Specified</div>	<div>0 No Emergency Power</div> <div>ZZ Emergency Power (specify requirements)</div>
<div>RP10 10' (3.048m) Wire Harness</div> <div>RP25 25' (7.62m) Wire Harness</div> <div>RP50 50' (15.24m) Wire Harness</div> <div>RP75 75' (22.86m) Wire Harness</div> <div>RP100 100' (30.48m) Wire Harness</div>	<div>AE 0-10V, 1.0% Dimming</div> <div>AT 0-10V, 0.1% Dimming</div> <div>AD DALI, 0.1% Dimming</div> <div>AX DMX, 100-0% Dimming</div> <div>AH Hi-lume 1% EcoSystem, Soft On / Fade to Black Technology, LDE¹</div> <div>AH2 ELV 1% 2-wire (Forward and Reverse Phase)⁴</div> <div>Optimized Power</div> <div>Add 'O' to power type</div> <div>example: AEO, ATO...etc. ¹</div> <div>VodeNODE</div> <div>Add 'N' to power type for Flexible 1 to 1 Power</div> <div>Add 'ON' to power type for Optimized Power</div> <div>example: AEN, ATN, AEON, ADON...etc. ²</div> <div>ZZ Other (please specify)</div> <div>See Power Guide for driver features & limitations.</div>		

Z

LED Type	Lumen Output	Color Temperature	Optics
Z Zipper Board	<div>LO Low Output</div> <div>SO Standard Output</div> <div>HO High Output¹</div> <div>ZZ Other (please specify)</div> <div>See IES Files page for details.</div> <div>See Power Guide for driver features & limitations.</div>	<div>90+ CRI</div> <div>27 2700K</div> <div>30 3000K</div> <div>35 3500K</div> <div>40 4000K</div> <div>ZZ Tunable White Available</div> <div>See Guide for details</div>	<div>U1A1 Symmetric, up 85° Asymmetric, down</div> <div>U2A1 Symmetric with EdgeGlow, up 85° Asymmetric, down</div> <div>U1 Symmetric, uplight only</div> <div>U2 Symmetric with EdgeGlow, uplight only</div> <div>A1 85° Asymmetric, downlight only</div>

Sensors	Finish	Options
<div>0 None</div> <div>ZZ Sensor (specify requirements)</div>	<div>AL Clear Anodized</div> <div>WH White Painted</div> <div>BL Black Anodized</div> <div>ZZ Other (please specify)</div>	<div>0 None</div> <div>9 9' 18/3 Cord and Plug ³</div> <div>CPP Chicago Plenum Power</div>

NOTES & LIMITATIONS

¹ Optimized Power is not available with Hi-lume 1% EcoSystem (AHO) Power Type.

² VodeNODE enclosure is not available with ELV 1% 2-wire (AH2) Power Type.

³ 9' 18/3 Cord and Plug is not available with Optics U1A1 and U1A2.

⁴ Lengths of 24" and shorter are not supported due to driver limitations. Daisy chaining multiple fixtures to achieve minimum load is permitted but may introduce installation complexity—consult factory for layout guidance.

Standard 5 Year Limited Warranty. See details [here](#). Contact factory for options on Limited Warranties up to 20 years.

Listed to UL standards for damp location by a Nationally Recognized Testing Laboratory (NRTL) recognized by OSHA. Certain limitations exist for each Certification. Contact factory for verification.



Applications

General Interior and Open Office



Budge & Heipt, Seattle, WA



Confidential Corporate Client

Sustainability & Certifications

DECLARE

International Living Future Institute (ILFI)


 Red List
Approved

All Vode Lighting linear light fixtures proudly carry the Red List Approved designation.


 Declare

Vode Adaptive Architectural Lighting Systems

Vode Lighting LLC

Final Assembly: Sonoma, California, US
Life Expectancy: 10+ Year(s)
End of Life Options: Recyclable (100%)

Ingredients:

Steel; Anodized Aluminum (6063-T5 Alloy); Small Electrical Component (RoHS); Copper; **Fluorinated Ethylene Propylene (masterbatch)**; Polymethyl methacrylate (PMMA); Stainless Steel; Polyoxymethylene Copolymer (POM); Styrene-butadiene polymer, hydrogenated; Poly(methyl methacrylate/butyl acrylate/styrene) (PMMA/BA/S); Styrene/butadiene copolymer; Distillates; Polypropylene; Calcium carbonate; Polycarbonate; EVA Copolymer; Methyl methacrylate (MMA); Polyphenylene Oxide; Brass; Tin, Organic

Living Building Challenge Criteria: Compliant

I-13 Red List:

☐ LBC Red List Free % Disclosed: 100% at 100ppm
☒ LBC Red List Approved VOC Content: Not Applicable
☐ Declared

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

VDE-0001
 EXP. 01 FEB 2026
 Original Issue Date: 2018

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
 INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

Click here to learn more: [International Living Future Institute](https://living-future.org/declare)

TM65NA

CIBSE & ASHRAE on Embodied Carbon

Vode recognizes TM65NA as the highest standard for understanding the embodied carbon of our fixtures.

Developed with ASHRAE, it adapts CIBSE's TM65 for North America, ensuring accurate regional assessments. It must be used alongside TM65 and follows TM65LA's framework.

System: 707 | ZipThree | Wall Mount
Embodied Carbon (kg CO₂e): 53.24*

***Note:** Embodied Carbon, expressed in kilograms of CO₂e is calculated using a 48" fixture and includes the LED driver.



Click here to learn more [CIBSE, ASHRAE](#).

BAA X BABA

Buy American Act / Build America & Buy America Act Compliance

Vode is dedicated to supporting domestic manufacturing and ensuring compliance with BAA and BABA requirements.

Given the complexity of our products, we recommend reaching out to vodecares@vode.com for confirmation regarding compliance for your specific project.



Click here to learn more: [US Department of Commerce](https://www.buyusa.gov/)

Structure

Rail Lengths	12.2" (310mm) - 96" (2438mm). Modified lengths available. See Rail Length Chart for more details.
Rail Dimensions	Rectangular profile, 0.27" (7mm) x 3.78" (96mm) x length.
Construction	Extruded and machined 6063 aluminum.
Mounting	Zero mount (mud-in) or surface mount. <i>ADA compliant</i>
System Run Length	12.2" (310mm) minimum. Unlimited maximum.
Operating Temperature	32°F to 95°F (0°C to 35°C).
Humidity	0-85%, non-condensing.
System Weight	0.5 lbs per ft (0.22kg per 305mm). Power supply and housing not included.

Materials


LED Board Construction	Aluminum core PCB, black LCP connectors, RoHS compliant.
Lens	High-impact extruded acrylic glass (PMMA).
Power Cable	Ø3mm, 33/2 AWG, Plenum (CMP) rated semi-rigid PVC or FEP, flame tested UL-910 (<i>PVC free in 2020</i>)
Cable Connectors	Unfilled black nylon, rated UL 94 V-0, halogen free, PVC or FEP overmold, RoHS compliant (<i>PVC free in 2020</i>)
Remote Linear Power Housing (RLP)	20.7" x 2.375" x 2.53", 0.054" formed Galvanized Steel
Remote Brick Power Housing (RBP)	4.32" x 3.37" x .078" Galvanized Steel mounting plate

Power and Controls

Power Type	Class 2 (<60V output) constant current driver
Dimming Controls	Dimming (0.1%, 1%), 0-10V, DALI, DMX, Hi-lume 1% are available. See Power Guide for details.
Input Voltage	120V - 277V, 50/60hz
Power Location	Remote power. Maximum remote distance up to 100' (30.5m) depending on driver selection. See Power Guide for details.


Remote power is locating the power supply away from the fixture. Remote power comes in two housing styles: brick style and linear style. Consult [Power Guide](#) to determine which type you will receive.

Remote Brick Power Housing




Supplied for some remote power applications. One remote power supply housing is supplied for each rail. Provided driver mounting plate fits standard 4" metal, square J-Boxes with a minimum volume of 21 in³ (J-Box not provided). See [Tech Sheet](#) for details.

Remote Linear Power Housing



One remote power supply housing is supplied with each power supply. All Vode linear remote drivers come in a 0.054" (0.8mm) formed galvanized steel power supply housing with five (5) knockouts: (4) 1-1/8", (1) 7/8" and (1) 9/16". Accommodates standard linear power supplies. See [Tech Sheet](#) for details.

Wire Harness




Wire harness connects driver to rail section. Lengths of 10' (3.0m) & 25' (7.6m) with snap-lock connectors for quick and easy installation. Multiple harnesses may be combined for lengths up to 100' (30.5m).. See [Tech Sheet](#) for details.

Power and Controls

Flexible 1 to 1 power


For Flexible 1 to 1 Power, Vode supplies one single output driver per fixture, allowing each fixture to be controlled independently. Direct/Indirect fixtures are supplied with two single output drivers, allowing the direct and indirect lighting to be controlled independently. Consult [Power Guide](#) to determine which type you will receive.

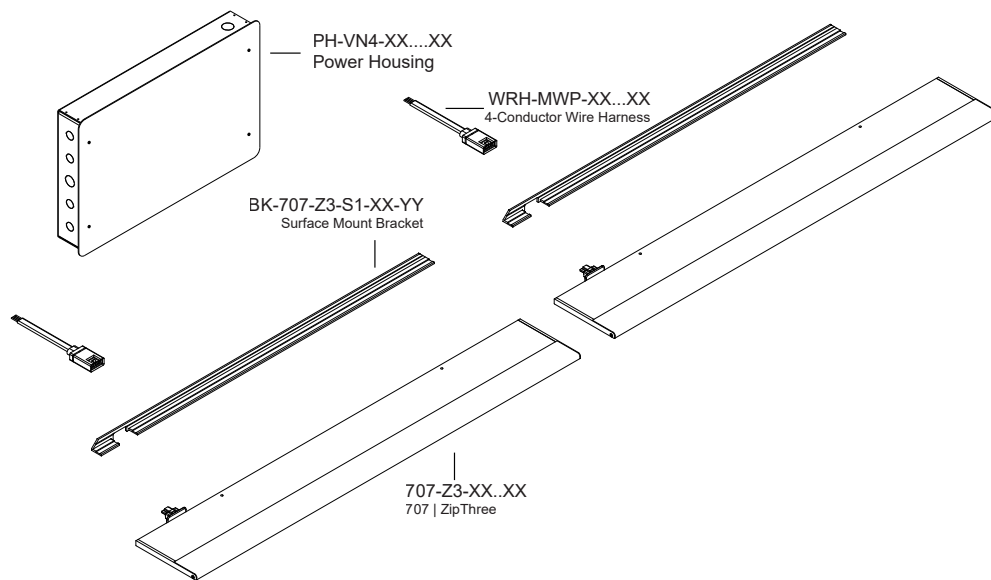

Optimized Power


To optimize power, Vode configures specifications with drivers that have 2 or 4 outputs. Depending on system configurations and power requirements, up to 4 fixtures can be powered from a 4-output driver. Consult [Power Guide](#) to determine which type you will receive.

IMPORTANT: Each fixture will still require individual wire harnesses, as shown below.

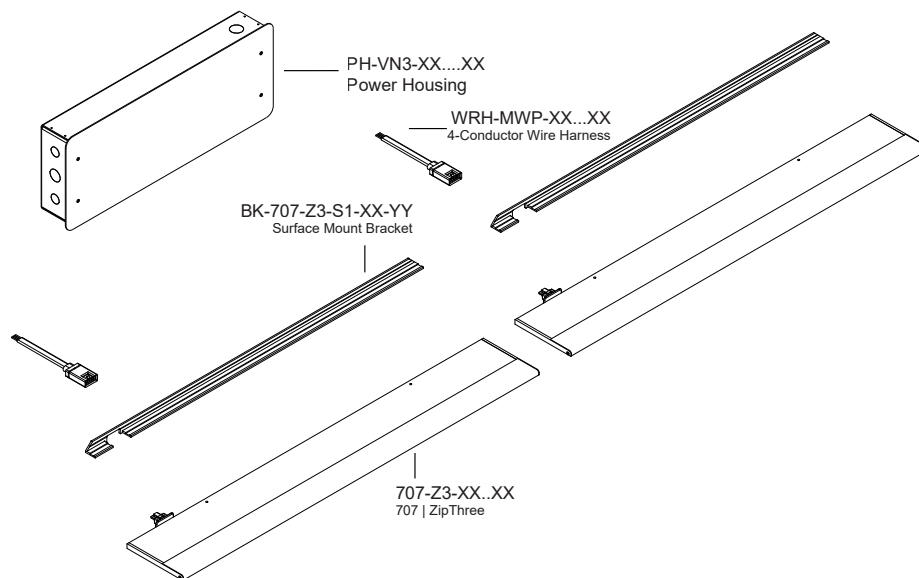


Note: Drawings not to scale, for reference only.


Dimensions

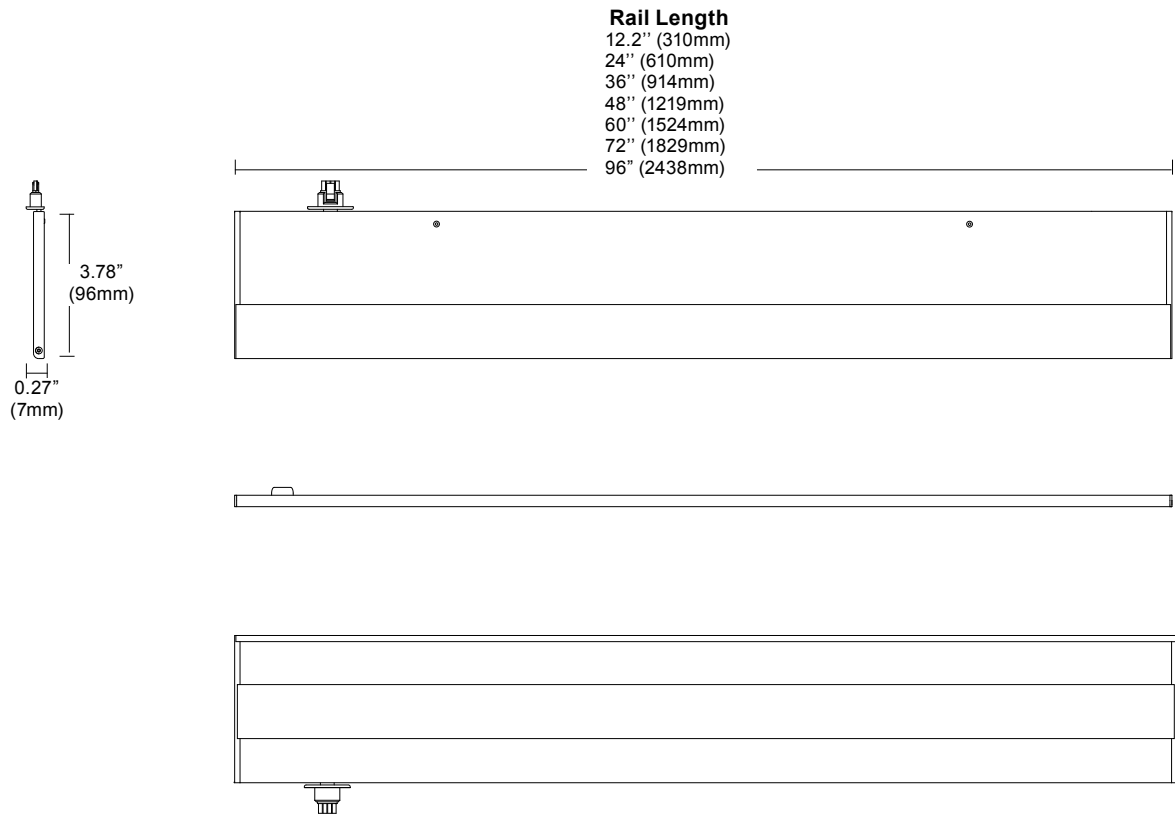

Layout

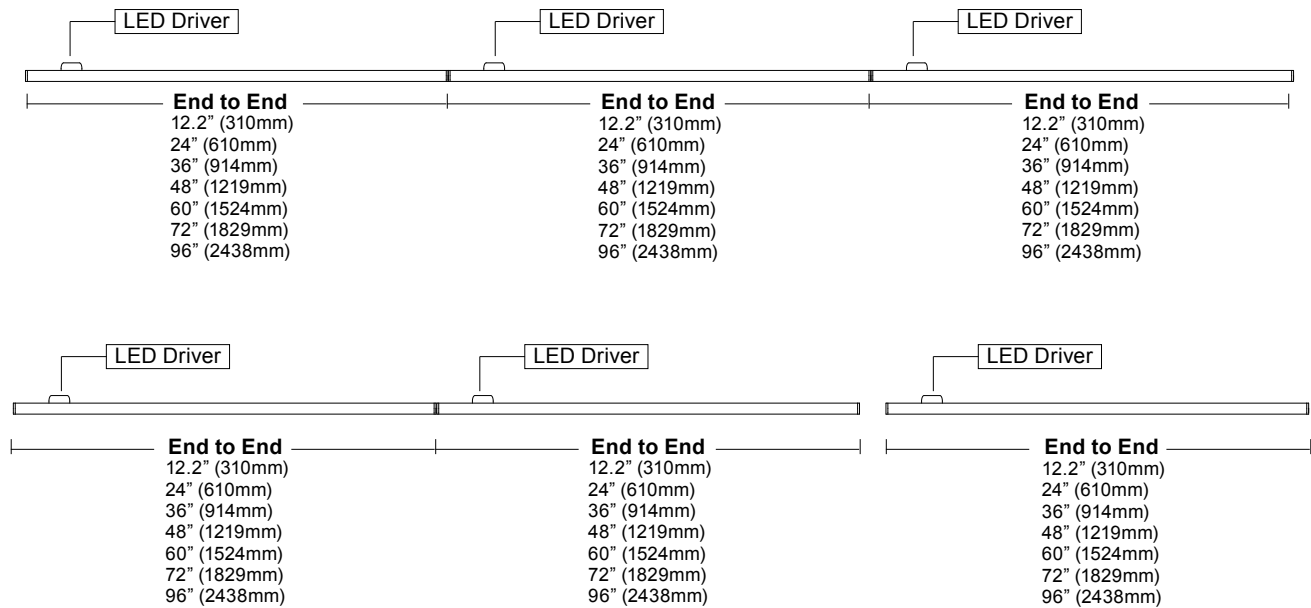

Mounting Options

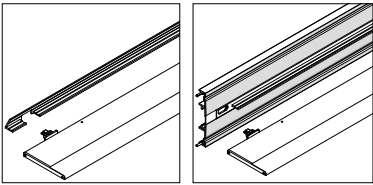


Surface mount (S1) Zero mount (Mud-in) (M1)

Performance | Zipper Board Optics

Zipper Board Optics design has 72 diodes per foot (305mm).

Symmetric, up | 85° Asymmetric, down (U1A1)

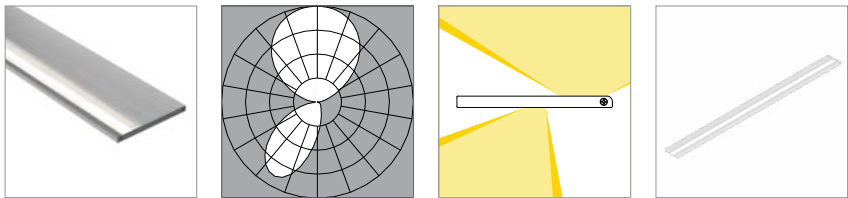



L80 >60,000 hours

	90 CRI (90min., 96 avg.)			
Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	98	101	103	107
Lumens per foot (305mm)	725	748	763	771
Watts per foot (305mm)	7.5	7.5	7.5	7.5
Standard Output (SO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	110	114	116	121
Lumens per foot (305mm)	1450	1496	1526	1541
Watts per foot (305mm)	13.2	13.2	13.2	13.2
High Output (HO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	103	106	108	112
Lumens per foot (305mm)	2755	2842	2900	2929
Watts per foot (305mm)	27	27	27	27

Performance | Zipper Board Optics

Zipper Board Optics design has 72 diodes per foot (305mm).




Symmetric with EdgeGlow, up | 85° Asymmetric, down (U2A1)



L80 >60,000 hours

	90 CRI (90min., 96 avg.)			
Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	98	101	103	107
Lumens per foot (305mm)	728	751	767	774
Watts per foot (305mm)	7.5	7.5	7.5	7.5
Standard Output (SO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	111	114	117	122
Lumens per foot (305mm)	1457	1503	1534	1549
Watts per foot (305mm)	13.3	13.3	13.3	13.3
High Output (HO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	103	107	109	113
Lumens per foot (305mm)	2768	2855	2914	2943
Watts per foot (305mm)	27	27	27	27

Symmetric, uplight only (U1)







L80 >60,000 hours

	90 CRI (90min., 96 avg.)			
Low Output (LO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	115	119	121	122
Lumens per foot (305mm)	426	440	449	453
Watts per foot (305mm)	3.8	3.8	3.8	3.8
Standard Output (SO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	131	135	137	139
Lumens per foot (305mm)	848	875	893	902
Watts per foot (305mm)	6.6	6.6	6.6	6.6
High Output (HO)	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	122	126	128	130
Lumens per foot (305mm)	1634	1686	1720	1737
Watts per foot (305mm)	9.9	9.9	9.9	9.9

Performance | Zipper Board Optics

Zipper Board Optics design has 72 diodes per foot (305mm).



Symmetric with EdgeGlow, uplight only (U2)



L80 >60,000 hours

	90 CRI (90min., 96 avg.)			
	2700K	3000K	3500K	4000K
Low Output (LO)				
Efficacy - Lumens per Watt	117	120	123	124
Lumens per foot (305mm)	433	447	456	460
Watts per foot (305mm)	3.8	3.8	3.8	3.8
Standard Output (SO)				
Efficacy - Lumens per Watt	133	137	140	141
Lumens per foot (305mm)	866	893	912	921
Watts per foot (305mm)	6.6	6.6	6.6	6.6
High Output (HO)				
Efficacy - Lumens per Watt	123	127	129	131
Lumens per foot (305mm)	1646	1698	1732	1750
Watts per foot (305mm)	13.5	13.5	13.5	13.5

85° Asymmetric, downlight only (A1)



L80 >60,000 hours

	90 CRI (90min., 96 avg.)			
	2700K	3000K	3500K	4000K
Low Output (LO)				
Efficacy - Lumens per Watt	75	77	78	81
Lumens per foot (305mm)	276	285	290	293
Watts per foot (305mm)	3.8	3.8	3.8	3.8
Standard Output (SO)				
Efficacy - Lumens per Watt	85	88	89	93
Lumens per foot (305mm)	552	569	581	587
Watts per foot (305mm)	6.6	6.6	6.6	6.6
High Output (HO)				
Efficacy - Lumens per Watt	78	81	83	86
Lumens per foot (305mm)	1048	1081	1104	1115
Watts per foot (305mm)	13.5	13.5	13.5	13.5

Copyright © 2025 Vode Lighting LLC. All rights reserved. Vode, the Vode logo, BoxRail, FlyWing, MicroBaffle, Button Board, Zipper Board, Zero Canopy, Zero Block, VodeNODE and other names are either registered trademarks or trademarks of Vode Lighting LLC in the United States and may be registered in other countries. All other trademarks listed herein belong to their respective owners. Due to ongoing innovation, specification details may change without notice.