

IES Report




BoxRail® | 207 | 85° Asymmetric, down | 80 CRI | LO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-LO-35-A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	64	66	67	67
Total Lumens, 4' rail length (1219mm)	907	936	955	955
Lumens per foot (305mm)	227	234	239	239
Input Power (W), 4' rail length (1219mm)	14.4	14.4	14.4	14.4
Watts per foot (305mm)	3.6	3.6	3.6	3.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

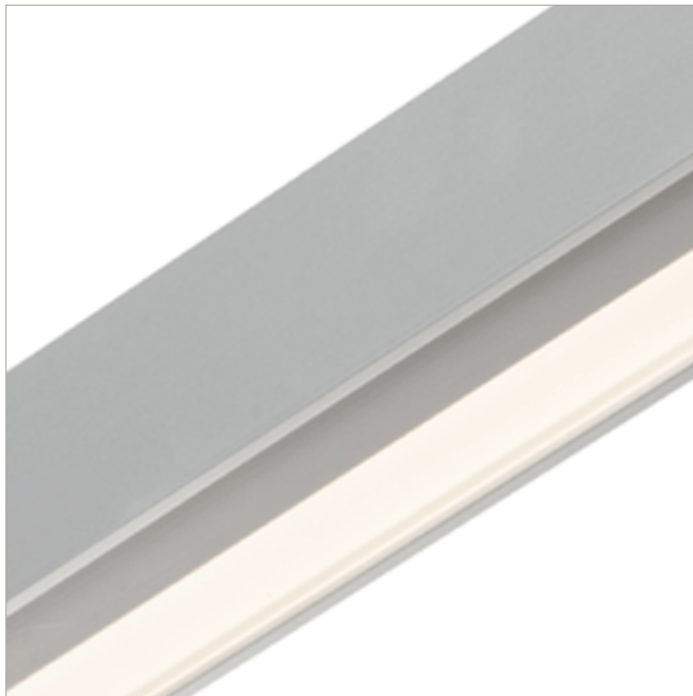

IES Report



BoxRail® | 207 | 85° Asymmetric, down | 80 CRI | SO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-SO-35-A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	72	75	76	76
Total Lumens, 4' rail length (1219mm)	1815	1872	1910	1910
Lumens per foot (305mm)	454	468	478	478
Input Power (W), 4' rail length (1219mm)	25.3	25.3	25.3	25.3
Watts per foot (305mm)	6.4	6.4	6.4	6.4
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report




BoxRail® | 207 | 85° Asymmetric, down | 80 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-35-A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	67	69	71	71
Total Lumens, 4' rail length (1219mm)	3448	3557	3630	3630
Lumens per foot (305mm)	862	889	907	907
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

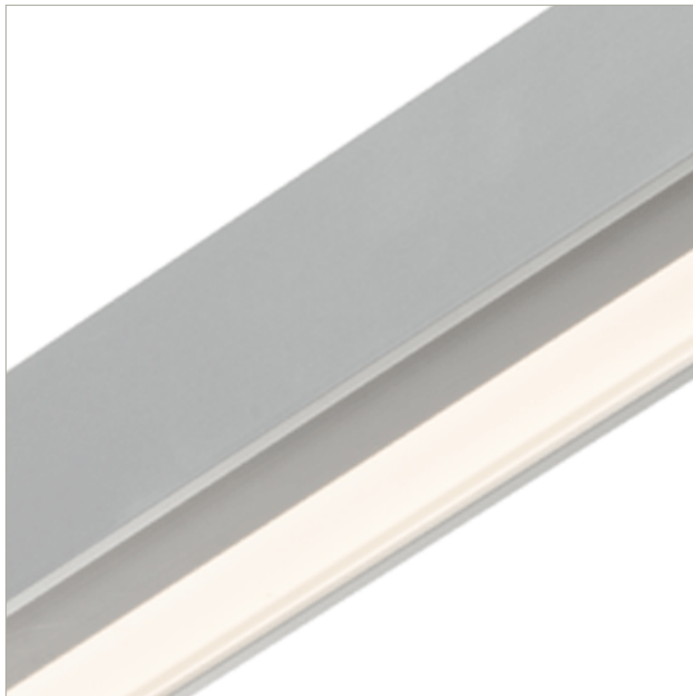

IES Report




BoxRail® | 207 | 85° Asymmetric, down | 90 CRI | LO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-LO-359-A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	55	57	58	58
Total Lumens, 4' rail length (1219mm)	782	807	823	832
Lumens per foot (305mm)	196	202	206	208
Input Power (W), 4' rail length (1219mm)	14.4	14.4	14.4	14.4
Watts per foot (305mm)	3.6	3.6	3.6	3.6
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

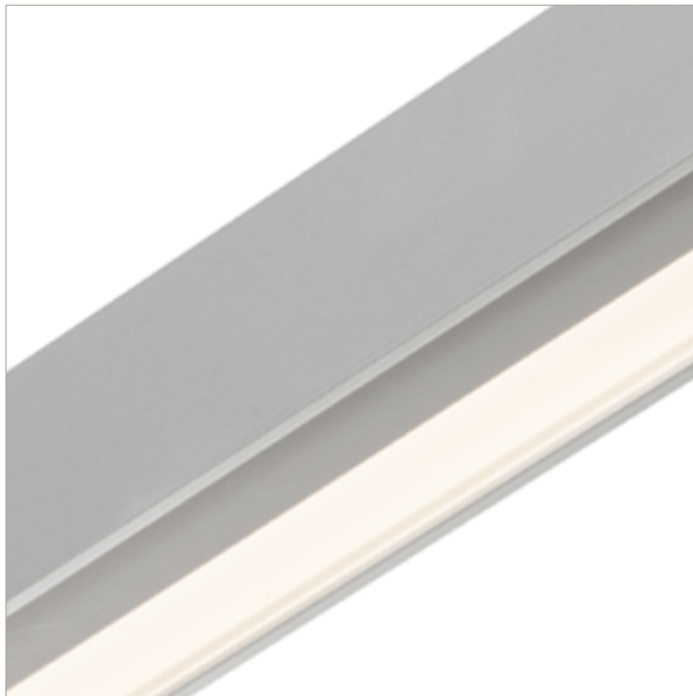

IES Report




BoxRail® | 207 | 85° Asymmetric, down | 90 CRI | SO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-SO-359-A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	62	64	66	66
Total Lumens, 4' rail length (1219mm)	1565	1614	1647	1663
Lumens per foot (305mm)	391	404	412	416
Input Power (W), 4' rail length (1219mm)	25.3	25.3	25.3	25.3
Watts per foot (305mm)	6.4	6.4	6.4	6.4
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

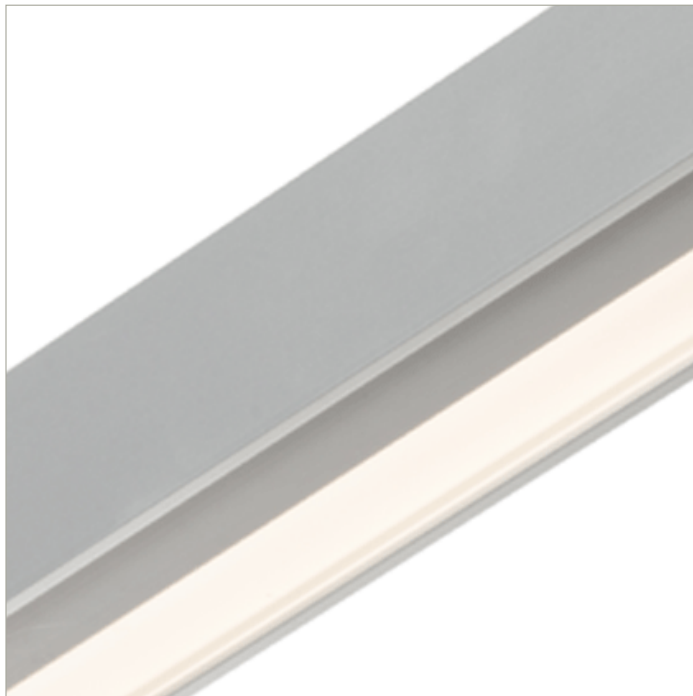

IES Report

BoxRail® | 207 | 85° Asymmetric, down | 90 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-359-A1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	58	60	61	62
Total Lumens, 4' rail length (1219mm)	2973	3067	3129	3161
Lumens per foot (305mm)	743	767	782	790
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).