

IES Report

BoxRail® | 207 | 40° Symmetric, down | 80 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-35-S1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	49	51	52	52
Total Lumens, 4' rail length (1219mm)	2517	2596	2649	2649
Lumens per foot (305mm)	629	649	662	662
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_S1.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L022010907 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 207-BX-48-Z-HO-35-S1

[LUMINAIRE] BoxRail LED, 48", 3500K, 80 CRI, zipper board,

[MORE] 40° symmetric lens down, high output, clear anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2644
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	51
Total Luminaire Watts	51.57
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.68
Spacing Criterion (90-270)	1.08
Spacing Criterion (Diagonal)	0.86
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	4.00 ft
Luminous Height	0.09 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	5757	10332	38039
55	3758	6269	25976
65	2461	3831	18524
75	1319	1915	12649
85	367	495	6748

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_S1.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	2230.8	2230.8	2230.8	2230.8	2230.8	2230.8	2230.8	2230.8	2230.8	2230.8
5	2147.2	2145.0	2145.0	2145.0	2147.2	2147.2	2149.4	2153.8	2156.0	2160.4
10	1909.6	1907.4	1911.8	1918.4	1929.4	1942.6	1960.2	1973.4	1991.0	2013.0
15	1564.2	1564.2	1575.2	1592.8	1614.8	1639.0	1669.8	1707.2	1751.2	1797.4
20	1194.6	1194.6	1212.2	1236.4	1265.0	1302.4	1348.6	1399.2	1456.4	1515.8
25	866.8	871.2	886.6	910.8	941.6	983.4	1029.6	1082.4	1148.4	1223.2
30	620.4	624.8	638.0	657.8	686.4	719.4	756.8	809.6	877.8	943.8
35	446.6	448.8	459.8	477.4	499.4	525.8	554.4	602.8	653.4	712.8
40	332.2	334.4	343.2	354.2	369.6	385.0	413.6	446.6	481.8	532.4
45	257.4	259.6	264.0	272.8	281.6	292.6	312.4	332.2	363.0	393.8
50	206.8	206.8	211.2	215.6	220.0	228.8	239.8	255.2	275.0	301.4
55	167.2	169.4	169.4	173.8	176.0	180.4	187.0	200.2	213.4	231.0
60	136.4	136.4	136.4	136.4	136.4	140.8	147.4	154.0	162.8	176.0
65	105.6	107.8	105.6	103.4	105.6	107.8	112.2	116.6	123.2	132.0
70	77.0	72.6	74.8	77.0	77.0	79.2	83.6	85.8	90.2	94.6
75	52.8	50.6	52.8	52.8	50.6	52.8	52.8	52.8	57.2	59.4
80	33.0	30.8	33.0	33.0	33.0	33.0	33.0	33.0	33.0	33.0
85	13.2	13.2	13.2	13.2	11.0	13.2	11.0	11.0	13.2	13.2
90	13.2	13.2	11.0	11.0	11.0	11.0	11.0	11.0	8.8	8.8

Vert. Angles **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0	2230.8	2230.8	2230.8	2230.8	2230.8	2230.8	2230.8	2230.8	2230.8
5	2164.8	2169.2	2175.8	2180.2	2186.8	2193.4	2200.0	2206.6	2213.2
10	2037.2	2063.6	2092.2	2101.0	2109.8	2120.8	2134.0	2147.2	2162.6
15	1839.2	1874.4	1911.8	1953.6	2002.0	2017.4	2032.8	2050.4	2072.4
20	1579.6	1643.4	1711.6	1760.0	1812.8	1874.4	1892.0	1911.8	1938.2
25	1302.4	1379.4	1456.4	1537.8	1599.4	1661.0	1707.2	1727.0	1755.6
30	1023.0	1111.0	1194.6	1280.4	1366.2	1425.6	1491.6	1509.2	1537.8
35	781.0	853.6	941.6	1025.2	1108.8	1179.2	1240.8	1269.4	1291.4
40	587.4	655.6	723.8	796.4	866.8	928.4	985.6	1020.8	1040.6
45	442.2	492.8	550.0	611.6	673.2	728.2	774.4	803.0	818.4
50	332.2	369.6	413.6	459.8	508.2	550.0	585.2	609.4	618.2
55	253.0	279.4	308.0	343.2	378.4	409.2	435.6	453.2	457.6
60	191.4	209.0	231.0	255.2	279.4	301.4	323.4	334.4	338.8
65	143.0	156.2	171.6	187.0	202.4	217.8	228.8	237.6	244.2
70	101.2	112.2	121.0	132.0	143.0	158.4	165.0	165.0	169.4
75	66.0	70.4	79.2	83.6	92.4	99.0	101.2	105.6	105.6
80	35.2	37.4	41.8	44.0	48.4	52.8	55.0	57.2	57.2
85	13.2	13.2	15.4	15.4	17.6	17.6	17.6	19.8	22.0
90	8.8	6.6	6.6	4.4	4.4	4.4	4.4	4.4	4.4

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_S1.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	704.29	N.A.	26.60
0-30	1286.14	N.A.	48.60
0-40	1783.98	N.A.	67.50
0-60	2394.45	N.A.	90.60
0-80	2623.12	N.A.	99.20
0-90	2644.01	N.A.	100.00
10-90	2441.59	N.A.	92.30
20-40	1079.68	N.A.	40.80
20-50	1444.1	N.A.	54.60
40-70	763.18	N.A.	28.90
60-80	228.67	N.A.	8.60
70-80	75.96	N.A.	2.90
80-90	20.89	N.A.	0.80
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	2644.01	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	202.41
10-20	501.88
20-30	581.84
30-40	497.84
40-50	364.42
50-60	246.06
60-70	152.71
70-80	75.96
80-90	20.89
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
 PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_S1.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	81	79
3	97	88	82	76	94	87	81	76	84	79	75	81	77	73	79	75	72	70
4	90	80	73	68	88	79	73	67	77	71	67	75	70	66	73	68	65	63
5	84	74	66	61	82	73	66	61	71	65	60	69	64	59	67	63	59	57
6	79	68	61	55	77	67	60	55	65	59	55	64	58	54	62	58	54	52
7	74	63	56	50	73	62	55	50	61	55	50	59	54	50	58	53	49	48
8	70	59	51	46	69	58	51	46	57	50	46	56	50	46	54	49	46	44
9	66	55	48	43	65	54	47	43	53	47	43	52	46	42	51	46	42	41
10	63	51	44	40	62	51	44	40	50	44	40	49	43	39	48	43	39	38

POLAR GRAPH

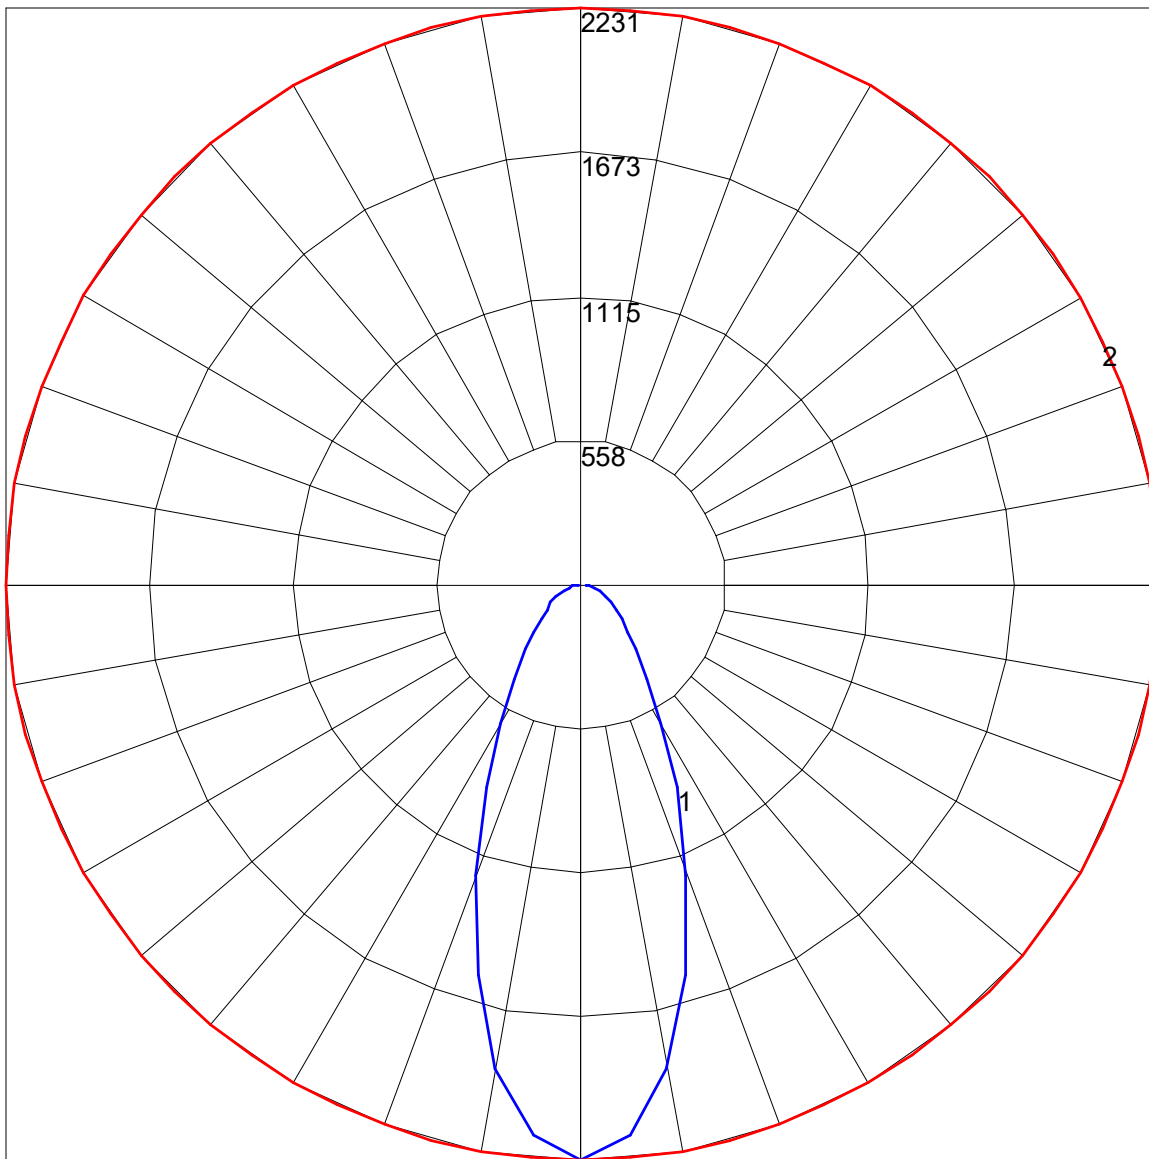

Maximum Candela = 2230.8 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)