

IES Report




BoxRail® | 207 | 120° Flywing, down | 80 CRI | LO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-LO-35-G2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	110	114	116	116
Total Lumens, 4' rail length (1219mm)	1581	1630	1664	1664
Lumens per foot (305mm)	395	408	416	416
Input Power (W), 4' rail length (1219mm)	14.4	14.4	14.4	14.4
Watts per foot (305mm)	3.6	3.6	3.6	3.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

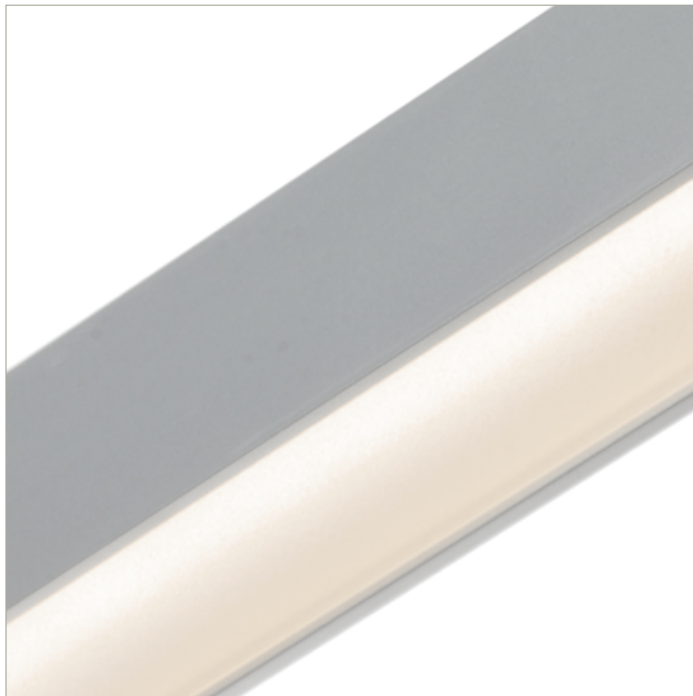

IES Report




BoxRail® | 207 | 120° Flywing, down | 80 CRI | SO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-SO-35-G2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	126	130	132	132
Total Lumens, 4' rail length (1219mm)	3161	3261	3327	3327
Lumens per foot (305mm)	790	815	832	832
Input Power (W), 4' rail length (1219mm)	25.3	25.3	25.3	25.3
Watts per foot (305mm)	6.4	6.4	6.4	6.4
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

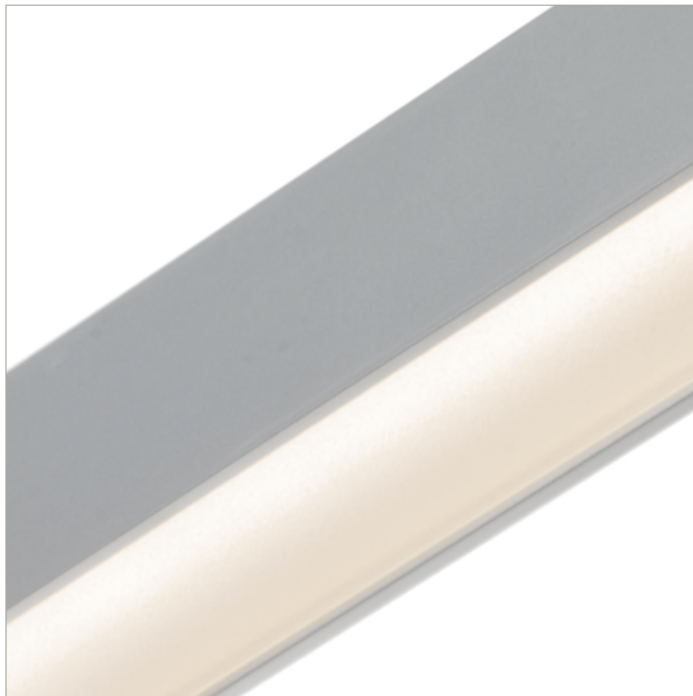

IES Report



BoxRail® | 207 | 120° Flywing, down | 80 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-35-G2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	117	121	123	123
Total Lumens, 4' rail length (1219mm)	6006	6196	6322	6322
Lumens per foot (305mm)	1502	1549	1581	1581
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report




BoxRail® | 207 | 120° Flywing, down | 90 CRI | LO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-LO-359-G2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	95	98	100	101
Total Lumens, 4' rail length (1219mm)	1363	1406	1434	1449
Lumens per foot (305mm)	341	351	359	362
Input Power (W), 4' rail length (1219mm)	14.4	14.4	14.4	14.4
Watts per foot (305mm)	3.6	3.6	3.6	3.6
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

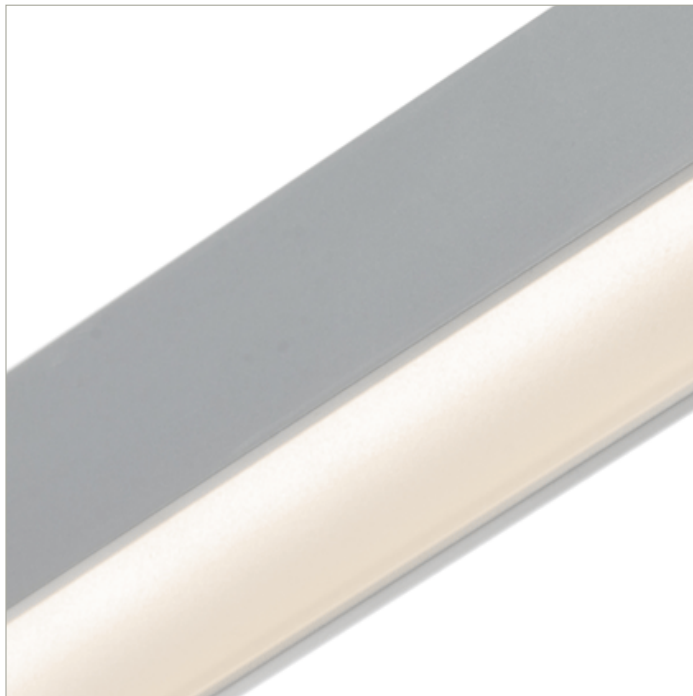

IES Report




BoxRail® | 207 | 120° Flywing, down | 90 CRI | SO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-SO-359-G2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	108	112	114	115
Total Lumens, 4' rail length (1219mm)	2725	2811	2869	2897
Lumens per foot (305mm)	681	703	717	724
Input Power (W), 4' rail length (1219mm)	25.3	25.3	25.3	25.3
Watts per foot (305mm)	6.4	6.4	6.4	6.4
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

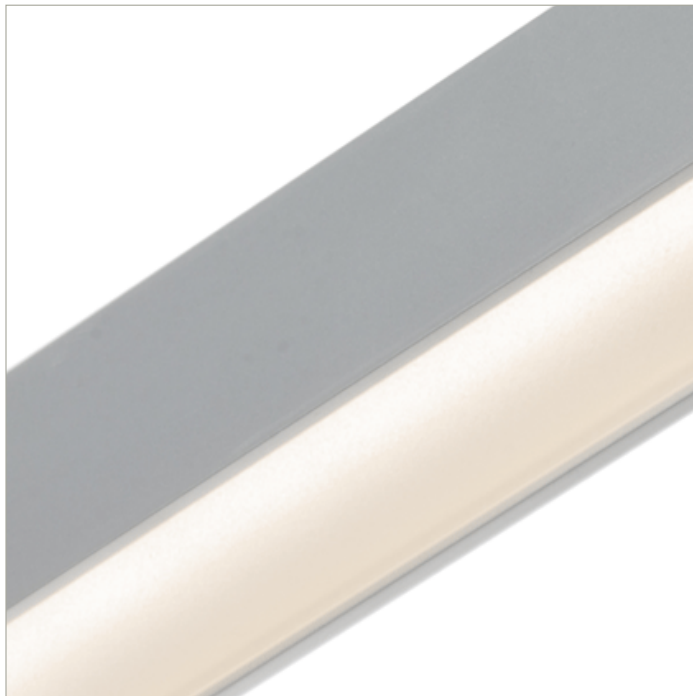

IES Report

BoxRail® | 207 | 120° Flywing, down | 90 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-359-G2-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	101	104	106	107
Total Lumens, 4' rail length (1219mm)	5178	5341	5450	5505
Lumens per foot (305mm)	1294	1335	1363	1376
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).