

IES Report
BoxRail® | 207 | White Baffle, down | 80 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-35-WB-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	60	62	63	63
Total Lumens, 4' rail length (1219mm)	3056	3152	3216	3216
Lumens per foot (305mm)	764	788	804	804
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	82	82	82	82

Due to the large number of options in Vode’s product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_WB_BL.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L022010916 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUE DATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 207-BX-48-Z-HO-35-WB-BL

[LUMINAIRE] BoxRail LED, 48", 3500K, 80 CRI, zipper board,

[MORE] white baffle w/clear lens down, high output, black anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3211
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	62
Total Luminaire Watts	51.57
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.28
Spacing Criterion (90-270)	0.72
Spacing Criterion (Diagonal)	0.94
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	4.00 ft
Luminous Height	0.09 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	5363	13218	18815
55	3363	7404	14986
65	2922	3767	11348
75	659	1276	7379
85	245	330	2699

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_WB_BL.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	2734.6	2734.6	2734.6	2734.6	2734.6	2734.6	2734.6	2734.6	2734.6	2734.6
5	2728.0	2712.6	2699.4	2686.2	2673.0	2659.8	2648.8	2635.6	2626.8	2615.8
10	2699.4	2673.0	2646.6	2620.2	2596.0	2571.8	2549.8	2508.0	2468.4	2433.2
15	2648.8	2609.2	2569.6	2532.2	2490.4	2426.6	2365.0	2307.8	2252.8	2204.4
20	2574.0	2521.2	2472.8	2415.6	2327.6	2246.2	2167.0	2092.2	2021.8	1958.0
25	2481.6	2420.0	2362.8	2259.4	2151.6	2050.4	1955.8	1867.8	1764.4	1667.6
30	2358.4	2288.0	2204.4	2074.6	1951.4	1834.8	1718.2	1595.0	1478.4	1372.8
35	2189.0	2107.6	1991.0	1848.0	1711.6	1575.2	1438.8	1304.6	1181.4	1056.0
40	1289.2	1254.0	1207.8	1188.0	1190.2	1196.8	1095.6	972.4	858.0	734.8
45	239.8	288.2	387.2	484.0	523.6	530.2	600.6	598.4	556.6	503.8
50	165.0	180.4	206.8	233.2	261.8	312.4	347.6	371.8	376.2	371.8
55	149.6	160.6	178.2	198.0	217.8	242.0	259.6	266.2	270.6	272.8
60	140.8	145.2	151.8	158.4	167.2	176.0	182.6	184.8	189.2	195.8
65	125.4	121.0	114.4	112.2	114.4	116.6	118.8	123.2	125.4	129.8
70	68.2	66.0	66.0	66.0	66.0	68.2	68.2	70.4	74.8	79.2
75	26.4	26.4	28.6	28.6	28.6	30.8	30.8	33.0	37.4	39.6
80	11.0	13.2	11.0	13.2	13.2	13.2	13.2	13.2	13.2	15.4
85	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.8
90	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.8

Vert. Angles Horizontal Angles

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0	2734.6	2734.6	2734.6	2734.6	2734.6	2734.6	2734.6	2734.6	2734.6
5	2607.0	2598.2	2591.6	2585.0	2580.6	2578.4	2574.0	2574.0	2574.0
10	2402.4	2373.8	2349.6	2327.6	2307.8	2292.4	2283.6	2274.8	2274.8
15	2158.2	2116.4	2079.0	2048.2	2024.0	2002.0	1984.4	1973.4	1971.2
20	1892.0	1830.4	1777.6	1729.2	1689.6	1661.0	1632.4	1610.4	1606.0
25	1579.6	1507.0	1443.2	1388.2	1339.8	1302.4	1276.0	1256.2	1254.0
30	1276.0	1185.8	1095.6	1016.4	952.6	897.6	855.8	827.2	825.0
35	928.4	811.8	752.4	708.4	673.2	642.4	622.6	611.6	609.4
40	657.8	587.4	556.6	539.0	523.6	512.6	503.8	499.4	495.0
45	481.8	462.0	448.8	435.6	424.6	418.0	411.4	407.0	404.8
50	369.6	360.8	352.0	347.6	343.2	336.6	332.2	330.0	330.0
55	275.0	272.8	270.6	270.6	268.4	266.2	264.0	261.8	264.0
60	202.4	200.2	204.6	204.6	204.6	204.6	204.6	202.4	202.4
65	136.4	138.6	147.4	149.6	149.6	149.6	151.8	151.8	149.6
70	83.6	88.0	92.4	96.8	101.2	101.2	103.4	103.4	103.4
75	41.8	46.2	50.6	55.0	59.4	59.4	61.6	63.8	61.6
80	17.6	17.6	19.8	22.0	24.2	26.4	28.6	28.6	28.6
85	8.8	6.6	6.6	6.6	6.6	6.6	6.6	8.8	8.8
90	6.6	6.6	6.6	4.4	4.4	4.4	2.2	2.2	4.4

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_WB_BL.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	875.41	N.A.	27.30
0-30	1674.77	N.A.	52.20
0-40	2400.8	N.A.	74.80
0-60	3018.64	N.A.	94.00
0-80	3199.37	N.A.	99.70
0-90	3210.53	N.A.	100.00
10-90	2964.65	N.A.	92.30
20-40	1525.39	N.A.	47.50
20-50	1921.37	N.A.	59.80
40-70	749.76	N.A.	23.40
60-80	180.73	N.A.	5.60
70-80	48.81	N.A.	1.50
80-90	11.16	N.A.	0.30
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	3210.53	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	245.88
10-20	629.53
20-30	799.36
30-40	726.04
40-50	395.98
50-60	221.86
60-70	131.93
70-80	48.81
80-90	11.16
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_35_WB_BL.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	109	106	104	101	102	100	98	99	97	95	95	94	92	90
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73
4	92	83	76	71	90	82	75	71	79	74	70	77	73	69	75	71	68	66
5	86	76	69	64	84	75	69	64	73	68	63	72	67	63	70	66	62	60
6	81	70	63	58	79	70	63	58	68	62	58	67	61	57	65	60	57	55
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51
8	72	61	54	49	71	60	54	49	59	53	49	58	53	49	57	52	48	47
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43
10	64	53	47	42	63	53	46	42	52	46	42	51	46	42	50	45	42	40

POLAR GRAPH

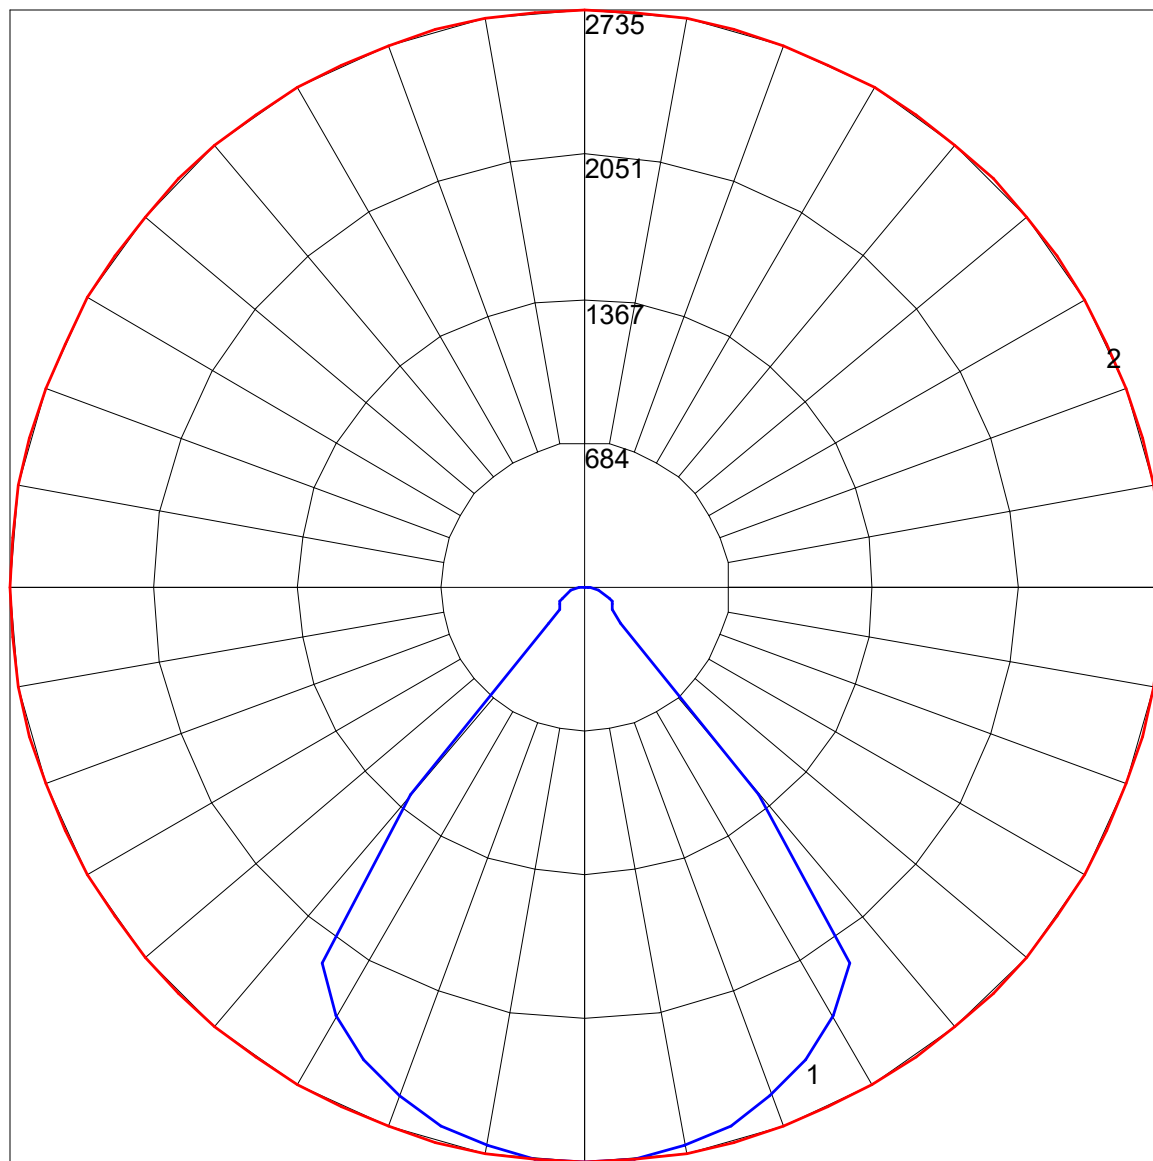

Maximum Candela = 2734.6 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)