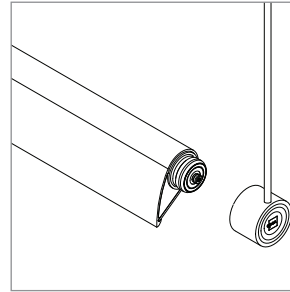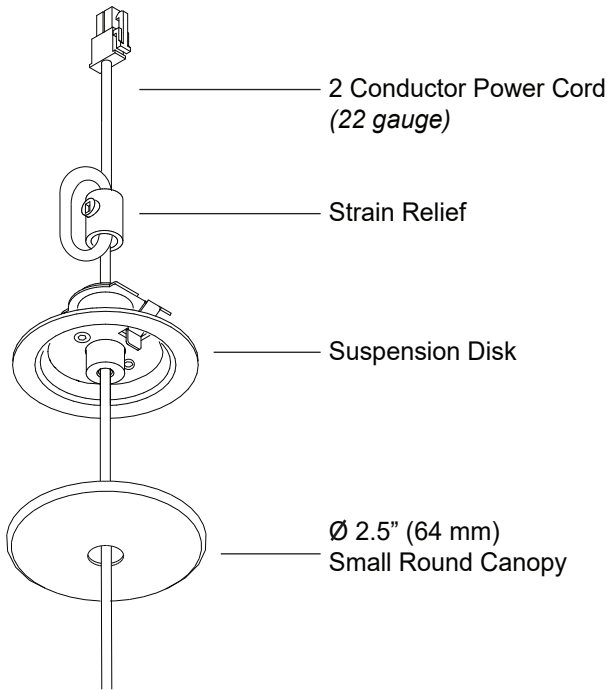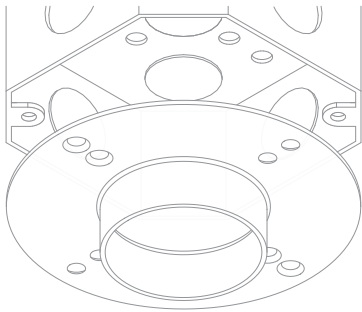**vode®**

Adaptive architectural lighting systems

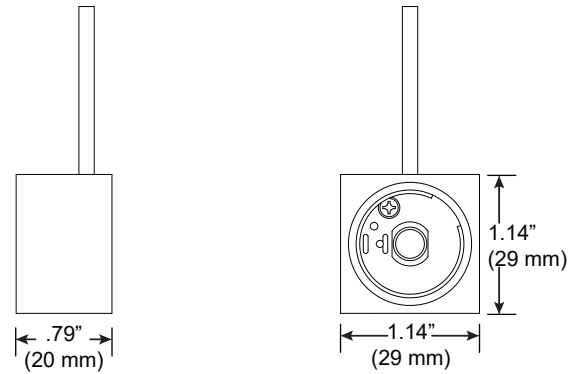# Small Canopy, Single Rail Hub

## For use with System | 107

Mounts System | 107 rails to ceiling cable installations. Infinite rotation, angle gauge and lock. Available with BoxRail®, RaceRail® and WingRail®.

2 Conductor Power Cord *(22 gauge)*

Strain Relief

Suspension Disk

Ø 2.5" (64 mm)
Small Round Canopy

**BoxRail Corner**

.79"
(20 mm)

1.14"
(29 mm)

1.14"
(29 mm)

**RaceRail / WingRail Corner**

.79"
(20 mm)

Ø 1.12"
(28 mm)

| PART NUMBER | **107-BX / RR / WG-HB-XX-CC-2R-2C-YY** |
|---|---|
| DESCRIPTION | System LED 107, suspension hub, 48" or 96" (1219mm or 2438mm) cable, small round canopy, 2 conductor, Available in anodized aluminum (AL) with clear cable and white canopy, white painted (WH) with white cable and white canopy, black anodized (AB) with black cable and black canopy. |

# Small Canopy, Single Rail Coupler
## For use with System | 107

Mounts System | 107 rails to ceiling cable installations. Infinite rotation, angle gauge and lock. Available with BoxRail®, RaceRail® and WingRail®.
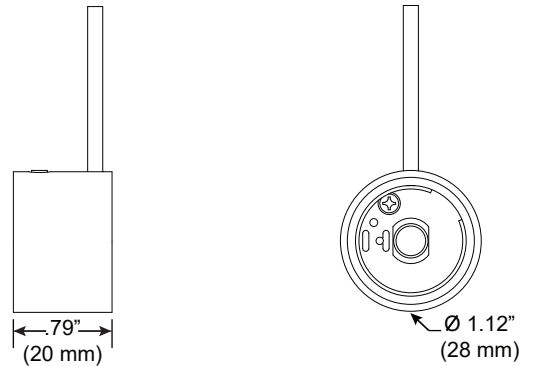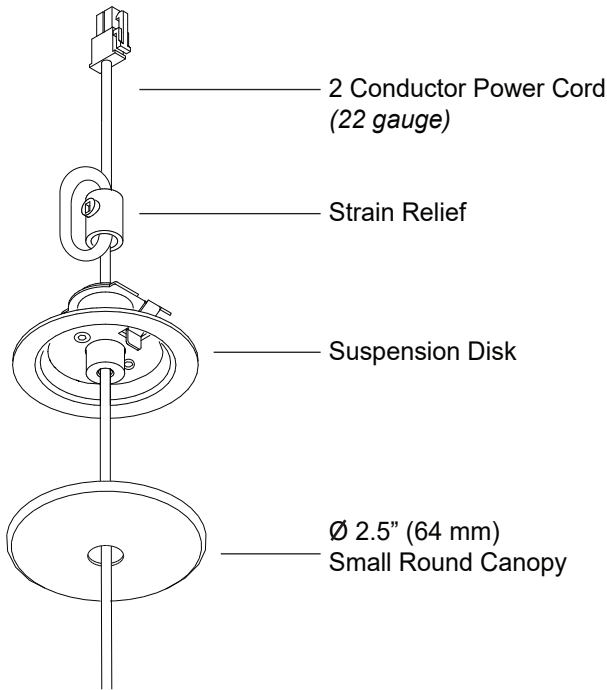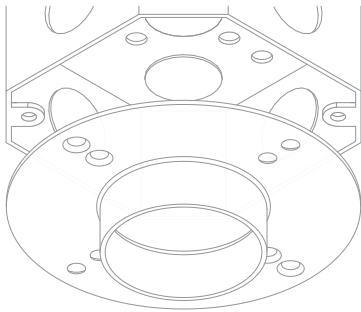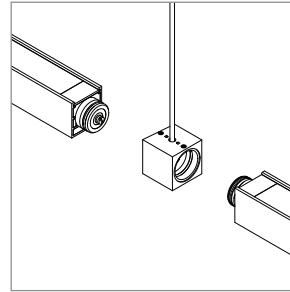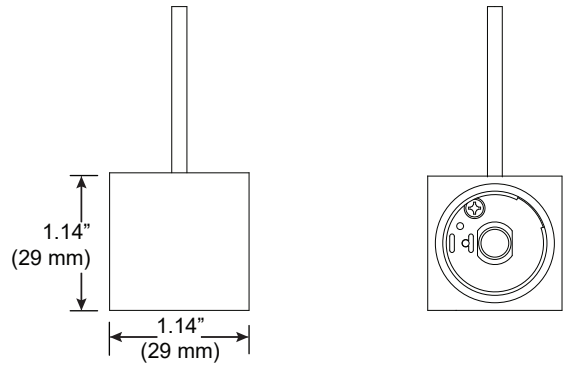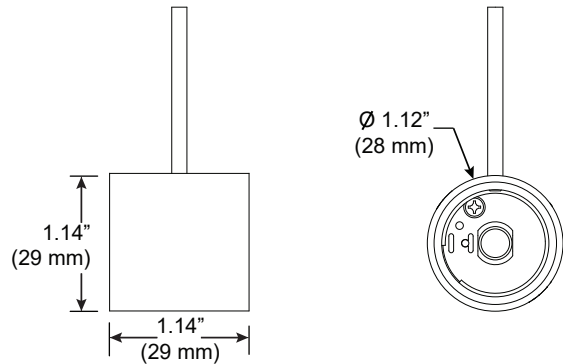
2 Conductor Power Cord
*(22 gauge)*

Strain Relief

Suspension Disk

Ø 2.5" (64 mm)
Small Round Canopy

**BoxRail Corner**

1.14"
(29 mm)

1.14"
(29 mm)

**RaceRail / WingRail Corner**

1.14"
(29 mm)

1.14"
(29 mm)

Ø 1.12"
(28 mm)

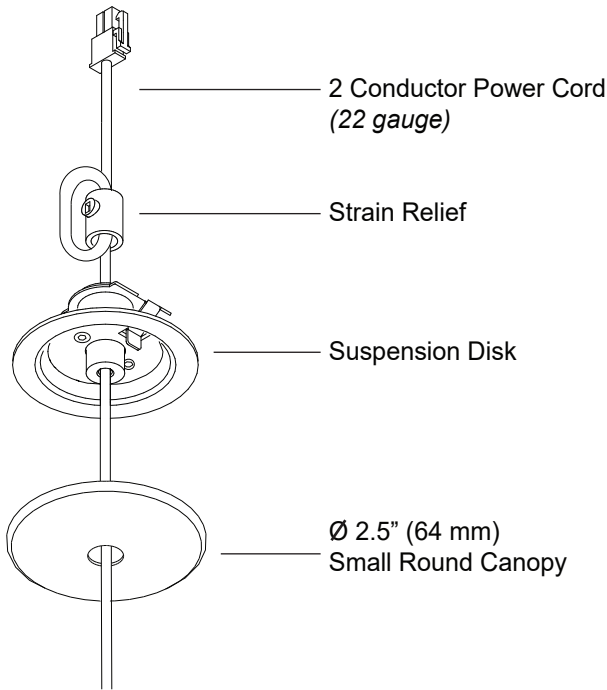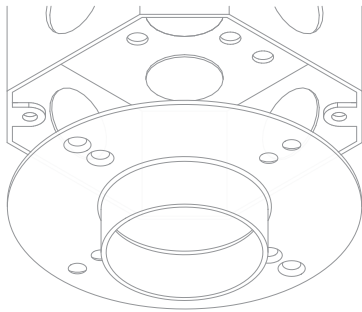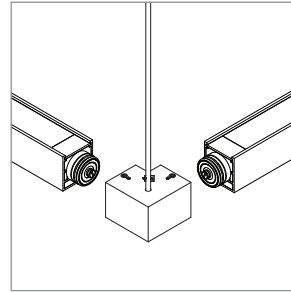| PART NUMBER | **107-BX / RR / WG-CP-XX-CC-2R-2C-YY** |
|---|---|
| DESCRIPTION | System LED 107, suspension coupler, 48" or 96" (1219mm or 2438mm) cable, small round canopy, 2 conductor, Available in anodized aluminum (AL) with clear cable and white canopy, white painted (WH) with white cable and white canopy, black anodized (AB) with black cable and black canopy. |

**vode®** Adaptive architectural lighting systems
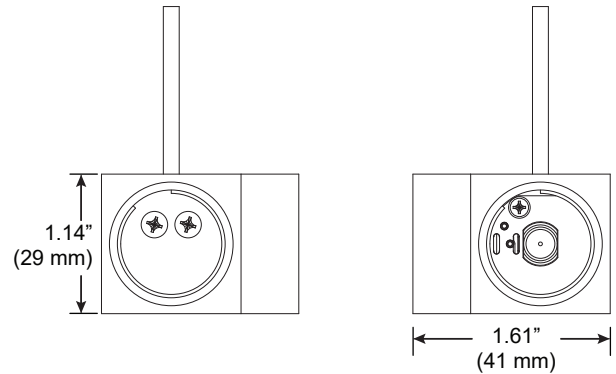
# Small Canopy, Single Rail Corner
## For use with System | 107

Mounts System | 107 rails to ceiling cable installations using a 90° corner. Available with BoxRail®, RaceRail® and WingRail®. Standard power feed is from the right side, left feed is available upon request.
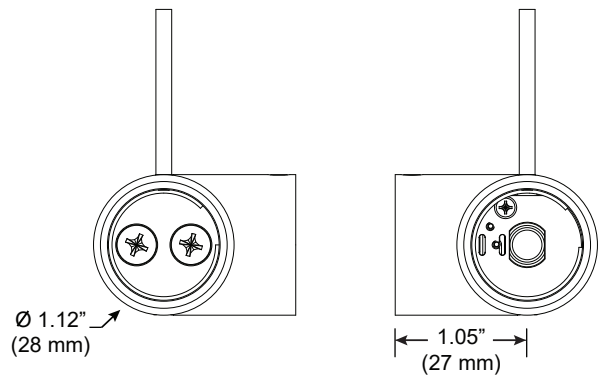
Technical Support: 707-996-9898

2 Conductor Power Cord *(22 gauge)*

Strain Relief

Suspension Disk

Ø 2.5" (64 mm)
Small Round Canopy

**BoxRail Corner**

1.14"
(29 mm)

1.61"
(41 mm)

**RaceRail / WingRail Corner**

Ø 1.12"
(28 mm)

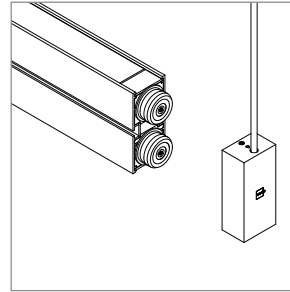1.05"
(27 mm)

| PART NUMBER | **107-BX / RR / WG-CP-XX-CC-4R-2C-L/R-90-YY** |
|---|---|
| DESCRIPTION | System LED 107, suspension coupler, 48" or 96" (1219mm or 2438mm) cable, small round canopy, 90° corner, 2 conductor, |
| | Available in anodized aluminum (AL) with clear cable and white canopy, white painted (WH) with white cable and white canopy, black anodized (AB) with black cable and black canopy. |

![vode® Adaptive architectural lighting systems]

# Small Canopy, Double Rail Hub

## For use with System | 107

Mounts System | 107 rails to ceiling cable installations.
Available with DoubleBox™ and DoubleRace™.

- 4 Conductor Power Cord *(22 gauge)*
- Strain Relief
- Suspension Disk
- Ø 2.5" (64 mm) Small Round Canopy

**DoubleBox Rail Corner**



2.48" (63 mm)

0.79" (20 mm)

1.14" (29 mm)

**DoubleRace Rail Corner**



R 0.56" (14 mm)

0.79" (20 mm)

**107-DB / DR-HB-XX-CC-2R-4C-YY**

PART NUMBER

DESCRIPTION    System LED 107, suspension hub, 48" or 96" (1219mm or 2438mm) cable, small round canopy, 4 conductor, Available in anodized aluminum (AL) with clear cable and white canopy, white painted (WH) with white cable and white canopy, black anodized (AB) with black cable and black canopy.
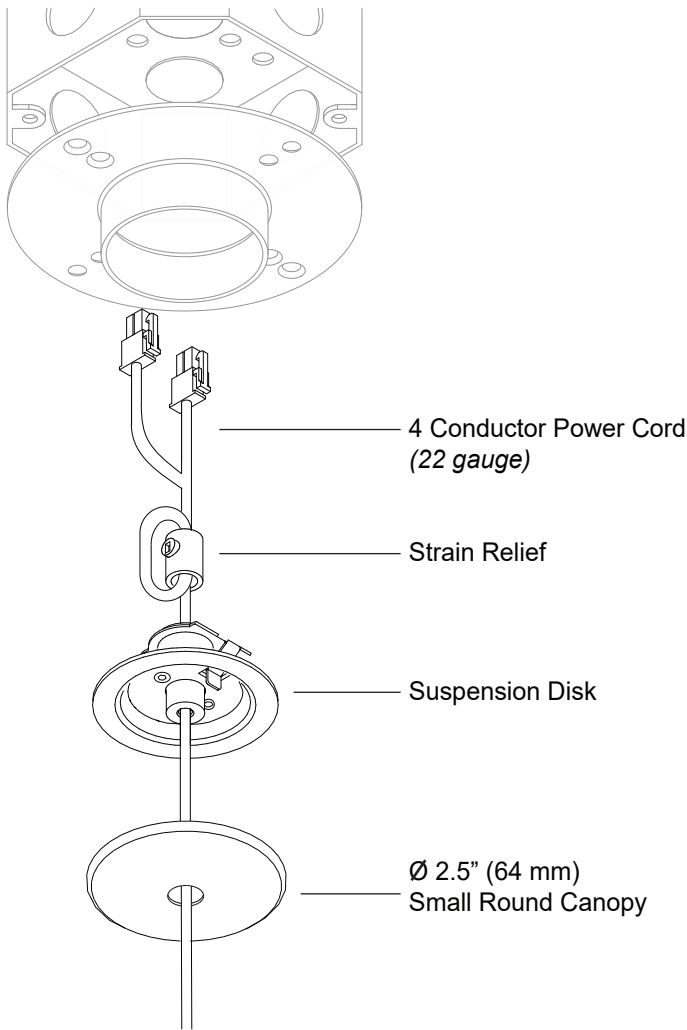
**vode**®  Adaptive architectural lighting systems
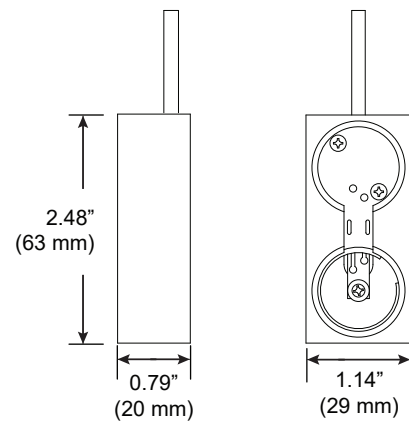
# Small Canopy, Double Rail Coupler

## For use with System | 107

Mounts System | 107 rails to ceiling cable installations.
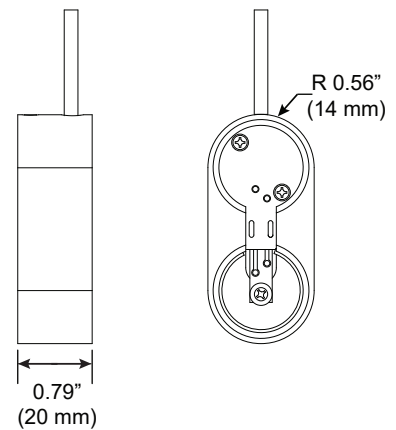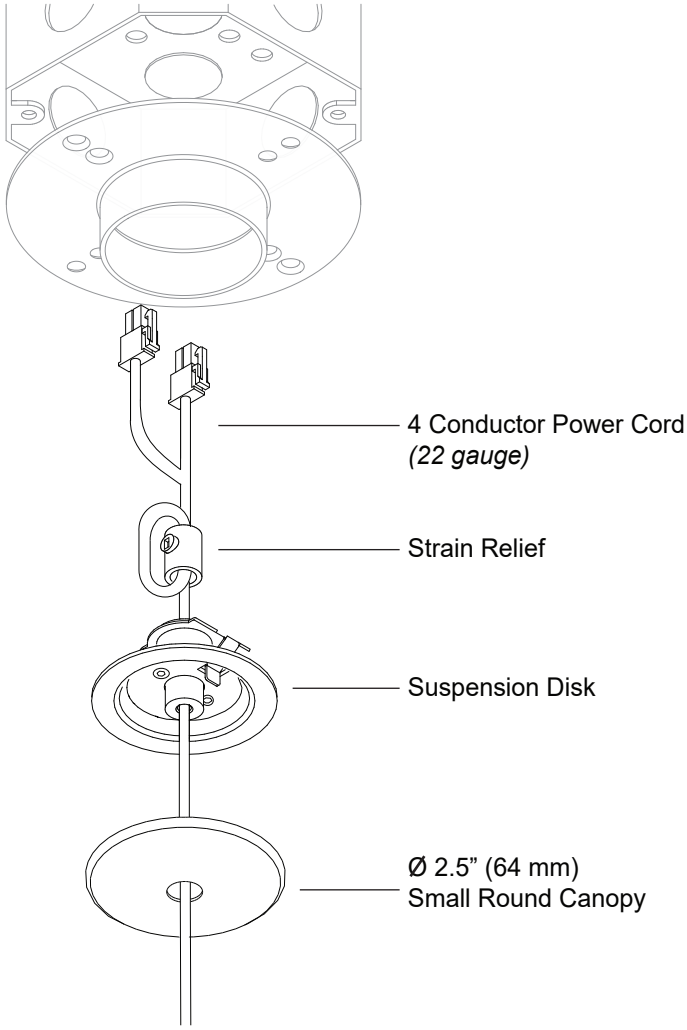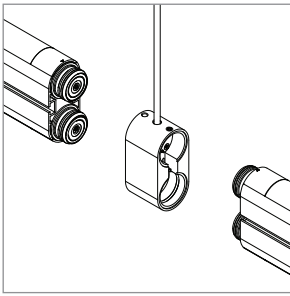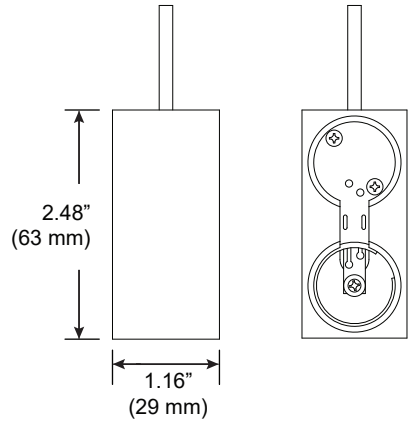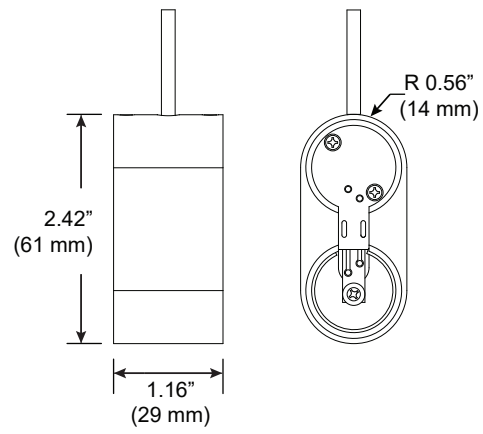Available with DoubleBox™ and DoubleRace™.

Technical Support: 707-996-9898

4 Conductor Power Cord
*(22 gauge)*

Strain Relief

Suspension Disk

Ø 2.5" (64 mm)
Small Round Canopy

**DoubleBox Rail Corner**

2.48"
(63 mm)

1.16"
(29 mm)

**DoubleRace Rail Corner**

R 0.56"
(14 mm)

2.42"
(61 mm)
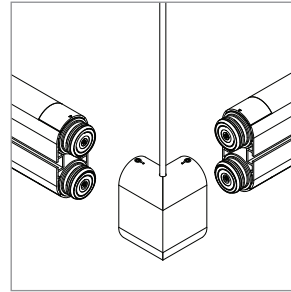
1.16"
(29 mm)

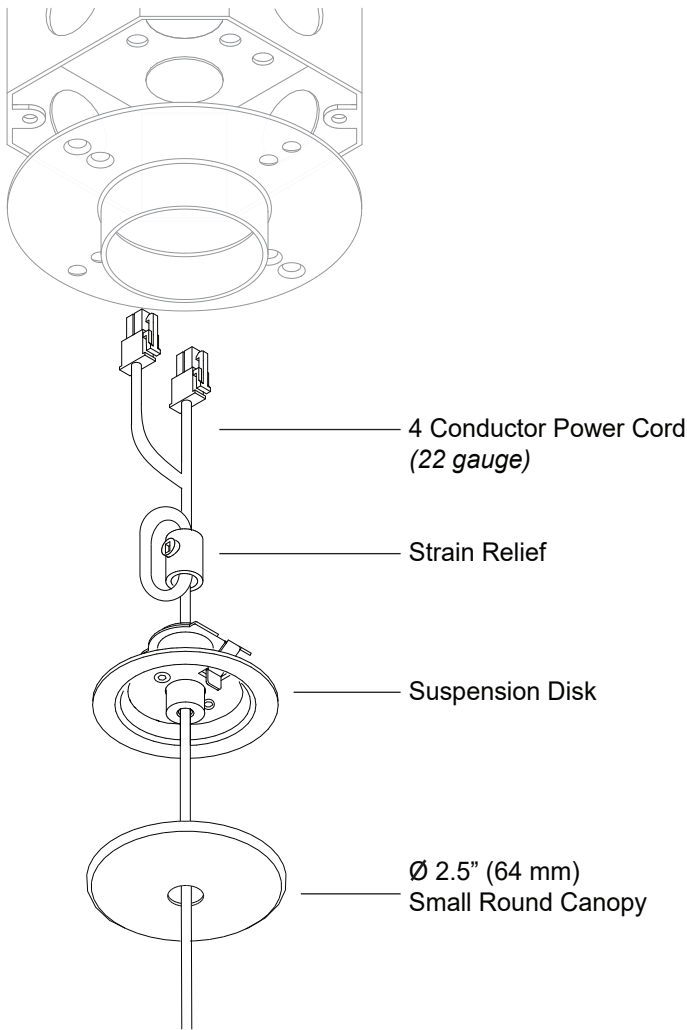| PART NUMBER | **107-DB / DR-CP-XX-CC-2R-4C-YY** |
|---|---|
| DESCRIPTION | System LED 107, suspension coupler, 48" or 96" (1219mm or 2438mm) cable, small round canopy, 4 conductor, Available in anodized aluminum (AL) with clear cable and white canopy, white painted (WH) with white cable and white canopy, black anodized (AB) with black cable and black canopy. |

**vode**®  Adaptive architectural lighting systems

# Small Canopy, Double Rail Corner
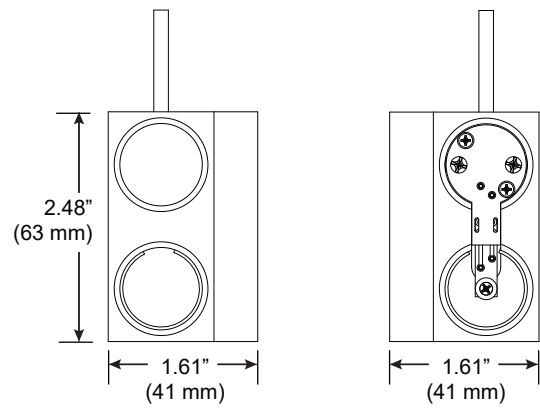
## For use with System | 107

Mounts System | 107 rails to ceiling cable installations using a 90° corner. Available with DoubleBox™ and DoubleRace™. Standard power feed is from the right side, left feed is available upon request.
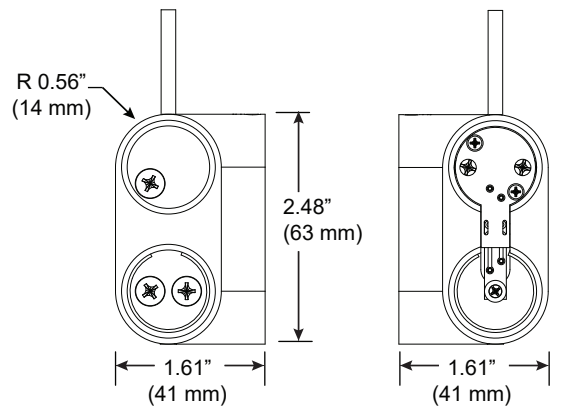
Technical Support: 707-996-9898



- 4 Conductor Power Cord *(22 gauge)*
- Strain Relief
- Suspension Disk
- Ø 2.5" (64 mm) Small Round Canopy

**DoubleBox Rail Corner**



2.48" (63 mm)

1.61" (41 mm)    1.61" (41 mm)

**DoubleRace Rail Corner**



R 0.56" (14 mm)

2.48" (63 mm)

1.61" (41 mm)    1.61" (41 mm)

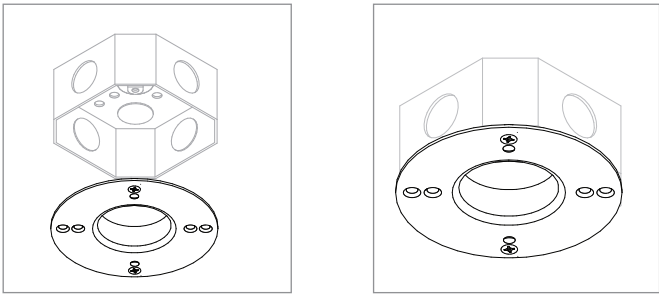PART NUMBER    **107-DB / DR-CP-XX-CC-2R-4C-L/R-90-YY**

DESCRIPTION    System LED 107, suspension coupler, 48" or 96" (1219mm or 2438mm) cable, small round canopy, 90° corner, 4 conductor,

Available in anodized aluminum (AL) with clear cable and white canopy, white painted (WH) with white cable and white canopy, black anodized (AB) with black cable and black canopy.

**vode**® Adaptive architectural lighting systems
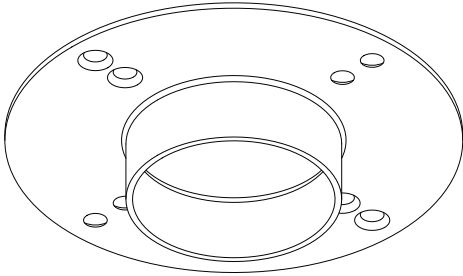
# Universal Mounting Plate

## For use with System | 107

Mounts System | 107 ceiling cable installations to any standard North American 4" j-box.

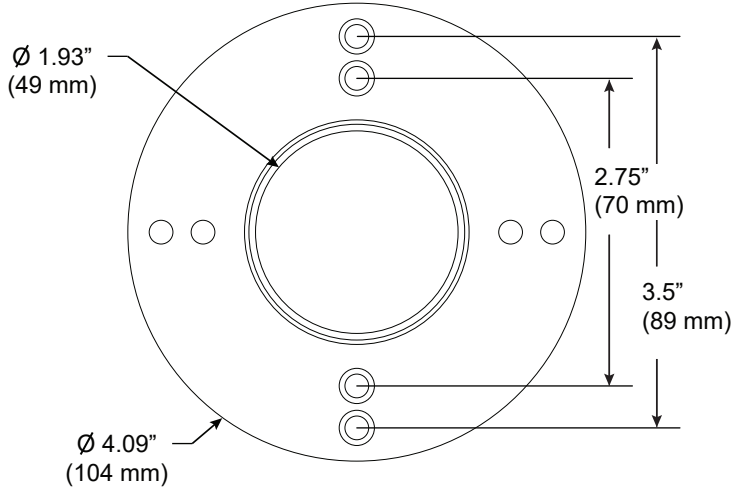Orientation for Small Round Canopy Mounting
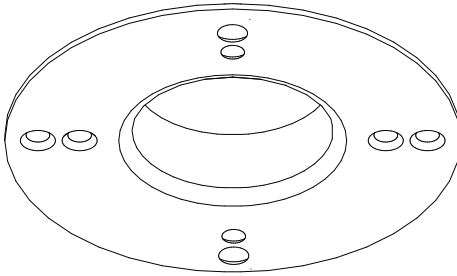
Orientation for Large Round Canopy Mounting



Ø 1.93"
(49 mm)

2.75"
(70 mm)

3.5"
(89 mm)

.70"
(18 mm)

Ø 4.09"
(104 mm)

PART NUMBER **CAN-107-CC-UMP-YY**

DESCRIPTION Canopy, System 107, ceiling cable, universal mounting plate, available in white painted (W1) and black painted (BL)