

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-BL-LO.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] L072413205 (SOURCE REPORT BASED FOR REFERENCE)
 [TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB
 [ISSUE DATE] 8/26/2024
 [MANUFAC] Vode Lighting LLC
 [LUMCAT] 707-Z2-48-Z-35-B1GB-BL-LO
 [LUMINAIRE] ZipTwo LED, 48", 3500K, 80 CRI, Zipper Board, 25° Graphite Baffle, Black Finish, Low Output
 [MORE] 3535 Low Glare, Low Output, Black
 [TEST PROCEDURE] IESNA:LM-79-19

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	394
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	30
Total Luminaire Watts	13.2
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.74
Spacing Criterion (90-270)	0.34
Spacing Criterion (Diagonal)	0.48
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	4.00 ft
Luminous Width (90-270)	0.13 ft
Luminous Height	0.13 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	1430	524	570
55	258	150	223
65	114	48	86
75	0	11	17
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-BL-LO.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>
0.0	934.5	934.5	934.5	934.5	934.5	934.5	934.5	934.5	934.5
2.5	915.5	916.0	906.0	905.5	903.0	876.0	894.0	902.5	908.5
5.0	880.0	869.5	820.0	789.0	748.5	744.0	807.0	856.5	882.5
7.5	837.5	801.0	702.5	637.5	578.5	593.5	691.0	784.5	838.0
10.0	791.5	724.5	576.0	495.0	439.0	459.5	566.0	701.0	784.5
12.5	741.0	646.0	467.5	382.5	338.5	356.5	454.0	618.0	731.0
15.0	680.5	562.0	377.5	298.0	263.0	276.5	364.5	537.5	674.0
17.5	615.5	479.5	302.5	234.0	210.0	217.5	293.0	462.5	614.5
20.0	557.5	408.5	241.5	190.0	176.0	178.5	236.0	393.0	552.5
22.5	499.5	348.0	194.0	157.0	146.0	146.5	191.0	331.5	488.5
25.0	436.0	291.5	159.5	131.0	129.0	124.0	157.0	278.0	429.0
27.5	375.5	242.5	131.5	113.5	108.5	106.5	128.5	231.0	372.0
30.0	319.5	199.5	107.5	94.0	93.5	89.0	105.0	189.0	315.0
32.5	266.5	162.5	89.5	79.5	83.5	76.5	88.5	154.0	262.5
35.0	215.5	131.0	75.0	69.5	71.0	65.5	74.0	123.5	212.0
37.5	167.5	103.5	60.5	58.5	61.0	55.0	59.0	97.0	165.0
40.0	125.0	80.0	49.0	50.0	52.5	46.5	48.0	74.0	121.5
42.5	85.5	58.5	40.0	41.5	45.5	39.5	39.5	54.0	83.0
45.0	50.5	40.0	31.0	35.0	39.0	32.5	30.5	36.5	48.5
47.5	23.5	25.5	24.5	29.0	32.5	27.0	24.0	22.0	22.5
50.0	13.5	14.5	18.0	23.5	26.0	21.0	18.0	11.5	13.5
52.5	10.0	9.0	13.0	17.5	20.0	16.5	12.5	8.0	10.0
55.0	7.5	7.0	8.5	13.0	15.0	12.0	9.0	6.5	7.5
57.5	6.0	5.5	5.5	9.5	12.5	9.0	5.5	5.0	6.0
60.0	4.0	4.0	4.0	7.5	10.0	6.5	4.0	4.0	4.0
62.5	3.5	4.0	3.5	5.5	7.5	5.0	3.0	3.0	3.5
65.0	2.5	2.0	2.5	4.0	5.5	4.0	2.5	2.0	2.5
67.5	2.5	1.5	2.0	2.5	4.0	2.0	1.5	1.5	1.5
70.0	1.0	1.0	1.0	2.0	2.5	1.5	1.5	1.0	1.0
72.5	1.0	1.0	1.0	1.5	1.5	1.0	0.5	1.0	1.0
75.0	0.0	0.5	0.5	1.0	1.0	0.5	0.0	0.5	0.0
77.5	0.0	0.0	0.5	0.0	0.5	0.0	0.0	0.0	0.0
80.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-BL-LO.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	187.94	N.A.	47.80
0-30	286.24	N.A.	72.70
0-40	350.81	N.A.	89.10
0-60	389.67	N.A.	99.00
0-80	393.52	N.A.	100.00
0-90	393.52	N.A.	100.00
10-90	322.96	N.A.	82.10
20-40	162.87	N.A.	41.40
20-50	192.35	N.A.	48.90
40-70	42.08	N.A.	10.70
60-80	3.85	N.A.	1.00
70-80	0.63	N.A.	0.20
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	393.52	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	70.57
10-20	117.37
20-30	98.30
30-40	64.57
40-50	29.48
50-60	9.38
60-70	3.22
70-80	0.63
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-BL-LO.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0	
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	0
1	114	111	108	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94	0
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88	0
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82	0
4	98	91	86	81	96	90	85	81	88	83	80	86	82	79	84	81	78	77	0
5	93	86	80	76	92	85	79	75	83	78	75	81	77	74	80	76	74	72	0
6	89	81	75	71	88	80	75	71	78	74	70	77	73	70	76	72	69	68	0
7	85	76	71	67	84	76	70	67	75	70	66	73	69	66	72	68	65	64	0
8	82	73	67	63	80	72	67	63	71	66	63	70	66	62	69	65	62	61	0
9	78	69	63	60	77	69	63	60	68	63	59	67	62	59	66	62	59	58	0
10	75	66	60	57	74	65	60	57	65	60	56	64	59	56	63	59	56	55	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B1GB-BL-LO.IES


UGR TABLE - CORRECTED

Reflectances										
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	0.0	0.0	0.0	0.0	0.0	1.4	2.4	1.8	2.7	3.0
	3H	0.0	0.0	0.0	0.0	0.0	1.7	2.6	2.1	2.9	3.3
	4H	0.0	0.0	0.0	0.0	0.0	1.6	2.5	2.0	2.8	3.2
	6H	0.0	0.0	0.0	0.0	0.0	1.6	2.3	2.0	2.7	3.1
	8H	0.0	0.0	0.0	0.0	0.0	1.5	2.2	1.9	2.6	3.0
	12H	0.0	0.0	0.0	0.0	0.0	1.4	2.1	1.9	2.5	2.9
4H	2H	0.0	0.0	0.0	0.0	0.0	1.2	2.0	1.6	2.4	2.7
	3H	0.0	0.0	0.0	0.0	0.0	1.5	2.2	1.9	2.6	3.0
	4H	0.0	0.0	0.0	0.0	0.0	1.4	2.0	1.9	2.5	2.9
	6H	0.0	0.0	0.0	0.0	0.0	1.3	1.9	1.8	2.3	2.8
	8H	0.0	0.0	0.0	0.0	0.0	1.3	1.8	1.8	2.2	2.7
	12H	0.0	0.0	0.0	0.0	0.0	1.2	1.6	1.7	2.1	2.6
8H	4H	0.0	0.0	0.0	0.0	0.0	1.3	1.8	1.7	2.2	2.7
	6H	0.0	0.0	0.0	0.0	0.0	1.2	1.5	1.7	2.0	2.5
	8H	0.0	0.0	0.0	0.0	0.0	1.1	1.4	1.6	1.9	2.4
	12H	0.0	0.0	0.0	0.0	0.0	1.0	1.3	1.5	1.8	2.4
12H	4H	0.0	0.0	0.0	0.0	0.0	1.2	1.6	1.7	2.1	2.6
	6H	0.0	0.0	0.0	0.0	0.0	1.1	1.4	1.6	1.9	2.5
	8H	0.0	0.0	0.0	0.0	0.0	1.0	1.3	1.5	1.8	2.4

Maximum UGR = 3.3

POLAR GRAPH

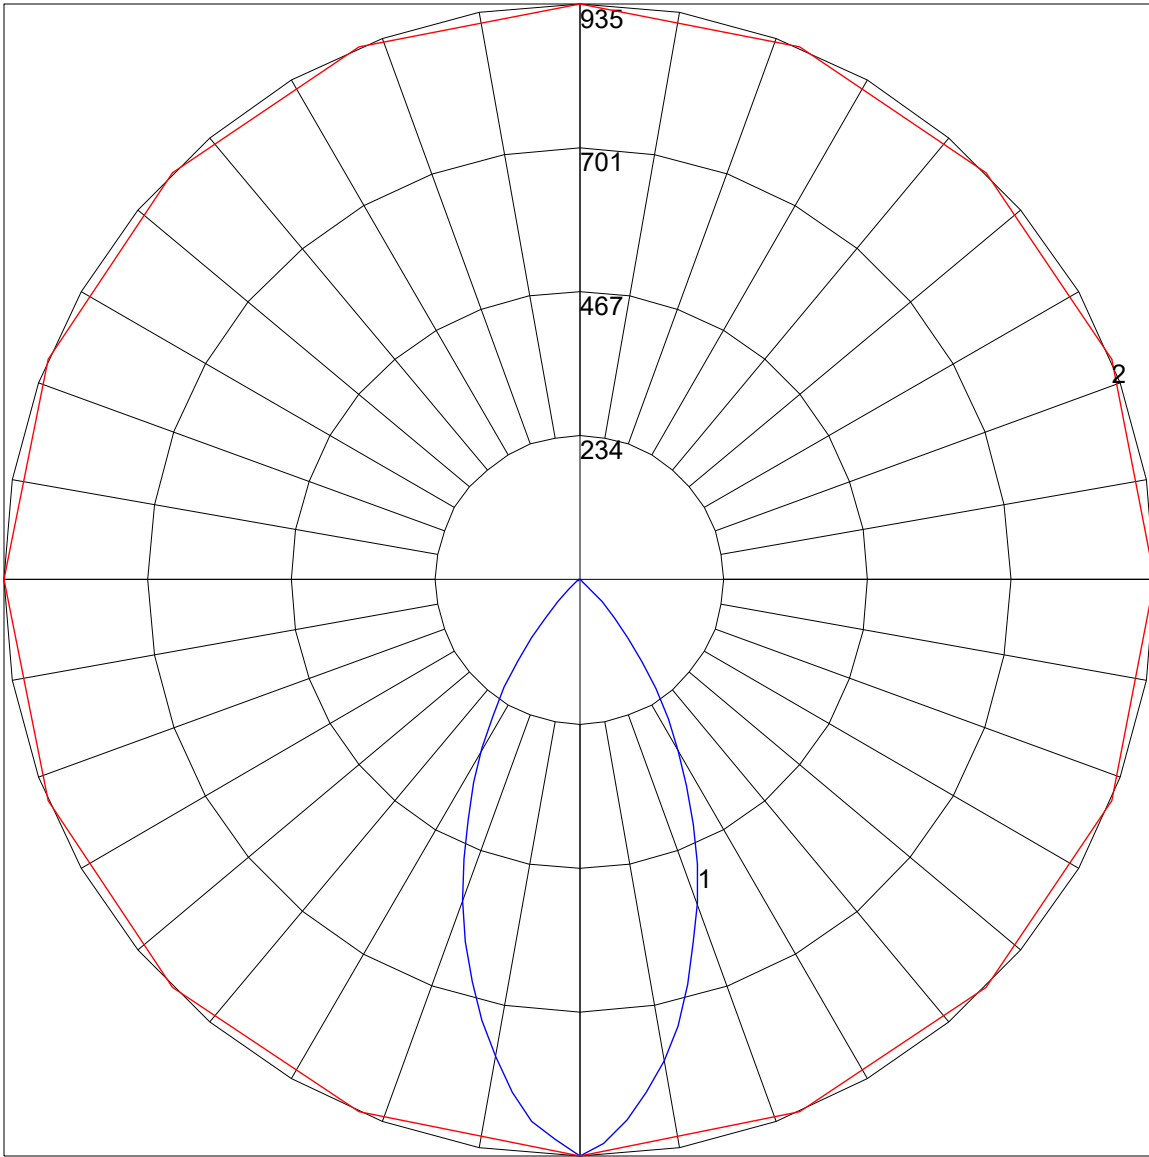

Maximum Candela = 934.5 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)