

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B2GB-BL-LO.IES**

**DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
[TEST] L072413208 (SOURCE REPORT BASED FOR REFERENCE)  
[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB  
[ISSUE DATE] 8/27/2024  
[MANUFAC] Vode Lighting LLC  
[LUMCAT] 707-Z2-48-Z-35-B2GB-BL-LO  
[LUMINAIRE] ZipTwo LED, 48", 3500K, 80 CRI, Zipper Board, 60° Graphite Baffle, Black Finish, Low Output  
[MORE] 3535 Low G;are, Low Output, Black  
[TEST PROCEDURE] IESNA:LM-79-19

**CHARACTERISTICS**

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	420
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	32
Total Luminaire Watts	13.2
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.82
Spacing Criterion (90-270)	0.86
Spacing Criterion (Diagonal)	0.86
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	4.00 ft
Luminous Width (90-270)	0.13 ft
Luminous Height	0.13 ft

**LUMINANCE DATA (cd/sq.m)**

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	1119	659	497
55	293	159	252
65	114	48	78
75	71	0	17
85	0	0	0

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>
<b>0</b>	468.0	468.0	468.0	468.0	468.0	468.0	468.0	468.0	468.0
<b>5</b>	453.5	461.5	468.0	473.0	473.0	475.5	465.0	449.0	452.0
<b>10</b>	414.0	436.5	469.5	502.5	515.5	504.0	460.5	421.0	413.5
<b>15</b>	365.5	399.5	462.0	511.5	523.0	478.0	452.0	383.5	363.0
<b>20</b>	312.5	365.0	400.5	421.0	407.0	367.0	394.5	344.5	313.5
<b>25</b>	261.5	317.0	302.0	288.0	237.0	238.5	293.5	292.5	257.5
<b>30</b>	203.0	255.0	205.0	166.0	132.0	131.0	203.5	223.5	201.0
<b>35</b>	146.0	183.5	125.0	94.0	78.5	76.0	126.0	155.5	145.0
<b>40</b>	90.5	114.0	71.0	55.5	49.0	45.5	71.0	92.5	90.5
<b>45</b>	39.5	60.0	39.0	35.0	34.0	29.5	38.5	40.0	40.0
<b>50</b>	12.5	20.0	20.5	24.0	24.5	19.5	20.0	12.0	12.5
<b>55</b>	8.5	8.5	9.0	15.5	17.0	12.0	9.0	7.5	8.5
<b>60</b>	5.0	5.0	4.5	8.5	9.0	6.0	4.5	4.0	4.0
<b>65</b>	2.5	2.5	2.5	4.0	5.0	3.0	2.5	2.5	2.5
<b>70</b>	1.5	1.5	1.5	2.0	2.5	1.5	1.5	1.5	1.5
<b>75</b>	1.0	0.0	0.0	0.5	1.0	1.0	0.5	0.0	0.0
<b>80</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
<b>85</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
<b>90</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B2GB-BL-LO.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	166.38	N.A.	39.60
0-30	294.34	N.A.	70.00
0-40	373.20	N.A.	88.80
0-60	416.35	N.A.	99.00
0-80	420.37	N.A.	100.00
0-90	420.37	N.A.	100.00
10-90	375.94	N.A.	89.40
20-40	206.82	N.A.	49.20
20-50	239.60	N.A.	57.00
40-70	46.49	N.A.	11.10
60-80	4.02	N.A.	1.00
70-80	0.67	N.A.	0.20
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	420.37	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	44.42
10-20	121.96
20-30	127.96
30-40	78.86
40-50	32.78
50-60	10.37
60-70	3.35
70-80	0.67
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B2GB-BL-LO.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0	
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	0
1	114	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93	0
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87	0
3	102	96	91	87	100	94	90	86	92	88	84	89	86	83	87	84	82	80	0
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	75	0
5	92	83	78	73	90	82	77	73	81	76	72	79	75	72	77	74	71	69	0
6	87	78	72	68	86	77	72	68	76	71	67	75	70	67	73	69	66	65	0
7	83	74	67	63	82	73	67	63	72	66	63	70	66	62	69	65	62	61	0
8	79	69	63	59	78	69	63	59	68	62	59	67	62	58	66	61	58	57	0
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53	0
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50	0

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 707-Z2-48-Z-35-B2GB-BL-LO.IES**


**UGR TABLE - CORRECTED**

Reflectances										
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	0.0	0.0	0.0	0.0	0.0	2.0	3.0	2.3	3.3	3.6
	3H	0.0	0.0	0.0	0.0	0.0	2.2	3.1	2.5	3.4	3.8
	4H	0.0	0.0	0.0	0.0	0.0	2.1	3.0	2.5	3.3	3.7
	6H	0.0	0.0	0.0	0.0	0.0	2.0	2.8	2.5	3.2	3.6
	8H	0.0	0.0	0.0	0.0	0.0	2.0	2.7	2.4	3.1	3.5
	12H	0.0	0.0	0.0	0.0	0.0	1.9	2.6	2.4	3.0	3.4
4H	2H	0.0	0.0	0.0	0.0	0.0	1.7	2.5	2.1	2.9	3.3
	3H	0.0	0.0	0.0	0.0	0.0	1.9	2.6	2.3	3.0	3.4
	4H	0.0	0.0	0.0	0.0	0.0	1.9	2.5	2.3	2.9	3.4
	6H	0.0	0.0	0.0	0.0	0.0	1.8	2.3	2.3	2.8	3.3
	8H	0.0	0.0	0.0	0.0	0.0	1.7	2.2	2.2	2.7	3.1
	12H	0.0	0.0	0.0	0.0	0.0	1.7	2.1	2.2	2.6	3.1
8H	4H	0.0	0.0	0.0	0.0	0.0	1.7	2.2	2.2	2.7	3.1
	6H	0.0	0.0	0.0	0.0	0.0	1.6	2.0	2.1	2.5	3.0
	8H	0.0	0.0	0.0	0.0	0.0	1.5	1.9	2.1	2.4	2.9
	12H	0.0	0.0	0.0	0.0	0.0	1.5	1.8	2.0	2.3	2.9
12H	4H	0.0	0.0	0.0	0.0	0.0	1.7	2.1	2.2	2.6	3.1
	6H	0.0	0.0	0.0	0.0	0.0	1.6	1.9	2.1	2.4	2.9
	8H	0.0	0.0	0.0	0.0	0.0	1.5	1.8	2.0	2.3	2.9

Maximum UGR = 3.8

POLAR GRAPH

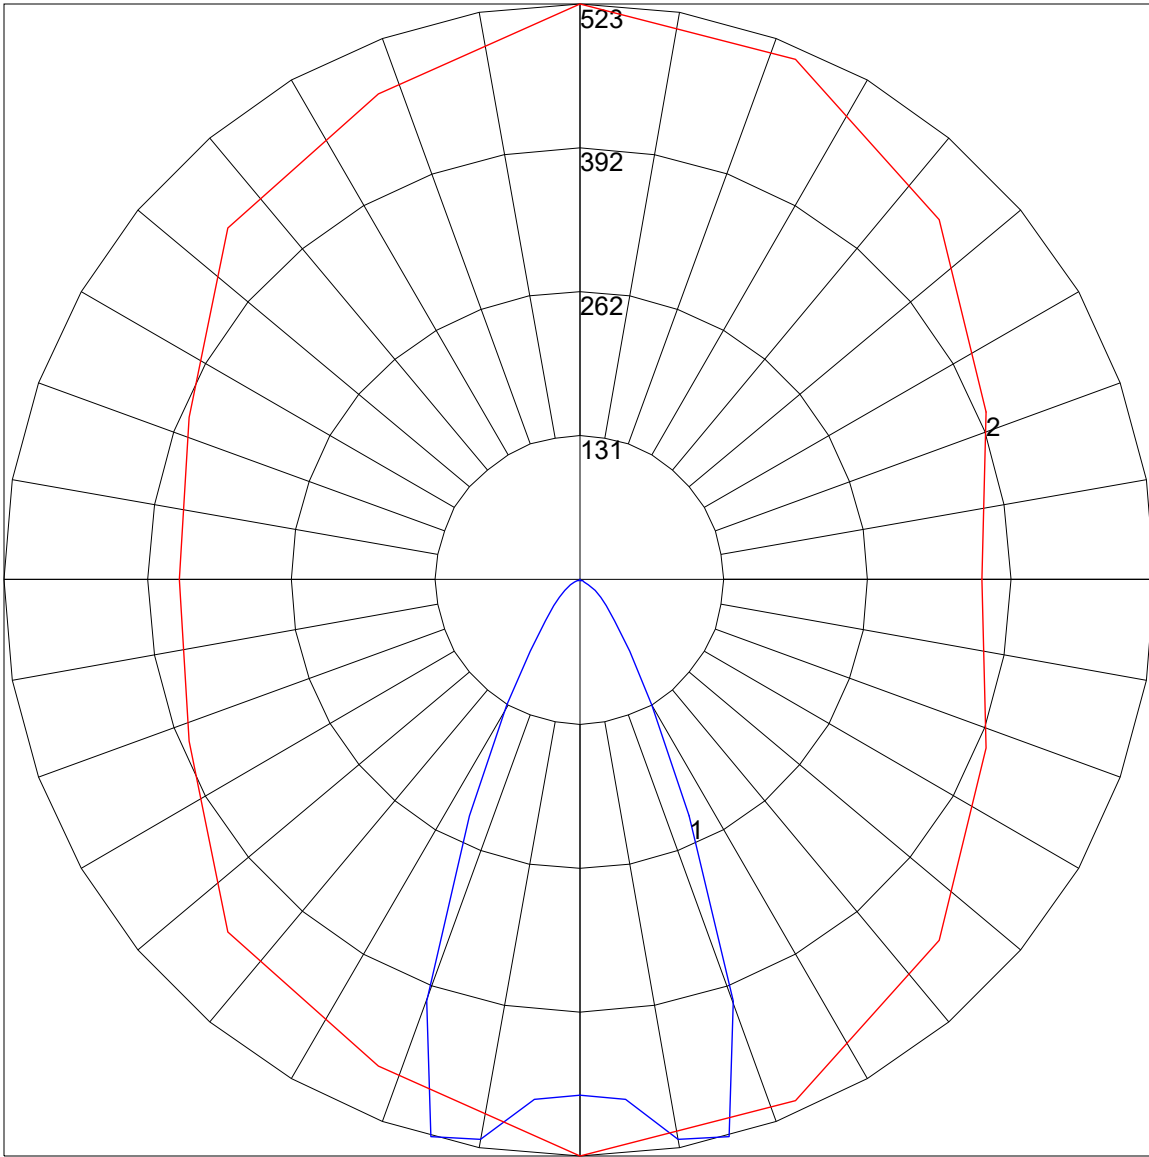

Maximum Candela = 523 Located At Horizontal Angle = 90, Vertical Angle = 15  
# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (15) (Through Max. Cd.)